



KOŁA PASOWE, KLINOWE I ZĘBATE

Koła pasowe do pasów zębatych

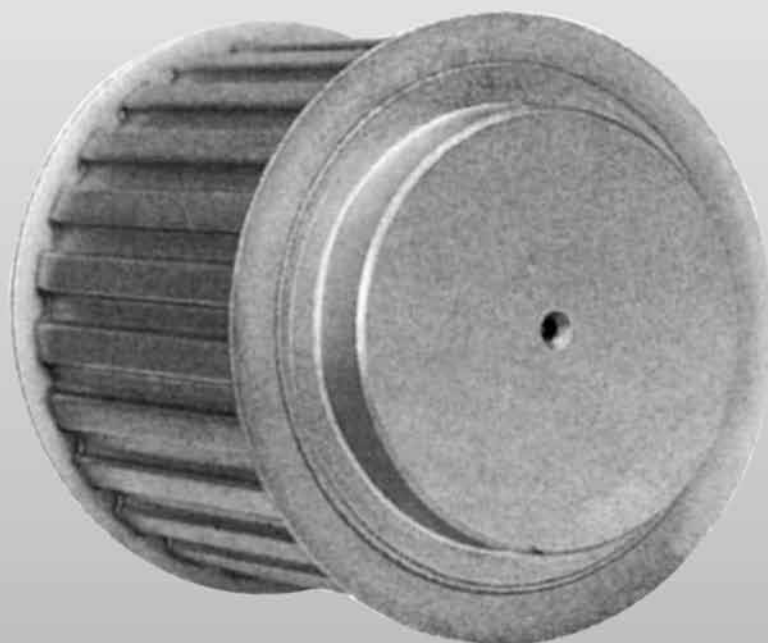

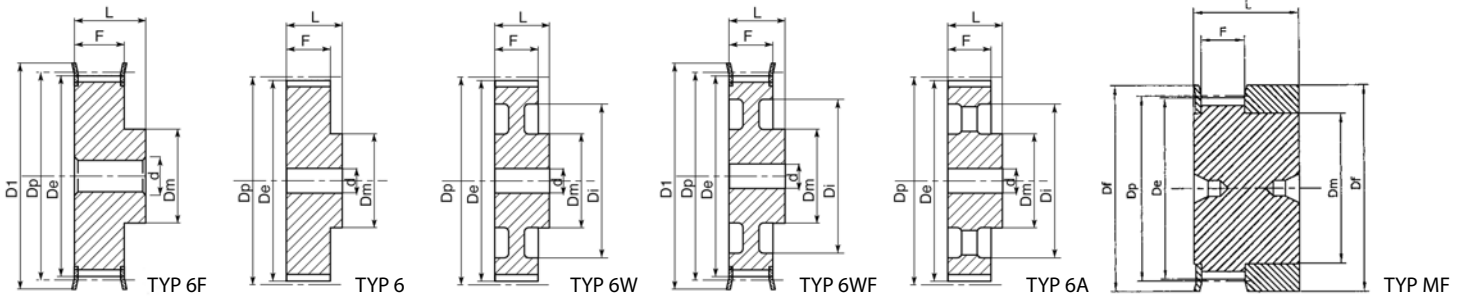

MXL 025 - 0,080" (2,032 mm)

WŁAŚCIWOŚCI	SYMBOL FABRYCZNY	NASZ KOD	TYP	TYP BANDY	LICZBA ZĘBÓW	Dp	De	Df	Dm	Di	F	L	OTWÓR PILOTOWY	MASA
ALUMINIUM	Z BANDA	16 MXL 025	MXL2516	MF	F02	16	10,35	9,84	15	8	-	8,5	16	-
		18 MXL 025	MXL2518	MF	F03	18	11,64	11,12	16	9,5	-	8,5	16	-
		20 MXL 025	MXL2520	MF	F03	20	12,94	12,43	16	9,5	-	8,5	16	-
		22 MXL 025	MXL2522	6F	F04	22	14,23	13,72	17,5	10	-	11	16	3
		24 MXL 025	MXL2524	6F	F06	24	15,52	15,01	20	10	-	11	16	3
		28 MXL 025	MXL2528	6F	F08	28	18,11	17,60	25	11	-	11	16	3
		30 MXL 025	MXL2530	6F	F08	30	19,40	18,90	25	12	-	11	16	4
		32 MXL 025	MXL2532	6F	F08	32	20,70	20,19	25	14	-	11	16	4
		36 MXL 025	MXL2536	6F	F09	36	23,29	22,78	28	16	-	11	16	4
		40 MXL 025	MXL2540	6F	F10	40	25,87	25,37	32	18	-	11	16	4
		42 MXL 025	MXL2542	6F	F10	42	27,17	26,67	32	18	-	11	16	5
		44 MXL 025	MXL2544	6F	F13	44	28,46	27,95	37	18	-	11	16	5
	BEZ BANDY	48 MXL 025	MXL2548	6	-	48	31,05	30,54	-	20	-	11	16	5
		60 MXL 025	MXL2560	6	-	60	38,81	38,30	-	24	-	11	16	5
		72 MXL 025	MXL2572	6	-	72	46,57	46,06	-	25	-	11	16	6

XL 037 - 1/5" (5,08 mm)


WŁAŚCIWOŚCI		SYMBOL FABRYCZNY	NASZ KOD		TYP	TYP BANDY	LICZBA ZĘBÓW	Dp	De	Df	Dm	Di	F	L	OTWÓR PILOTOWY	MASA		
			AL	C40														
ALUMINIUM	Z BANDA	10 XL 037	XA 37010	XC 37010	6F	F07	10	16,17	15,66	23	9,5	-	14,3	20	4	0,02		
		11 XL 037	XA 37011	XC 37011	6F	F07	11	17,79	17,28	23	9,5	-	14,3	20	4	0,02		
		12 XL 037	XA 37012	XC 37012	6F	F08	12	19,40	18,90	25	10	-	14,3	20	4	0,03		
		13 XL 037	XA 37013	XC 37013	6F	F08	13	21,02	20,51	25	10	-	14,3	20	4	0,04		
		14 XL 037	XA 37014	XC 37014	6F	F09	14	22,64	22,13	28	15	-	14,3	20	6	0,05		
		15 XL 037	XA 37015	XC 37015	6F	F09	15	24,26	23,75	28	15	-	14,3	20	6	0,05		
		16 XL 037	XA 37016	XC 37016	6F	F10	16	25,87	25,36	32	16	-	14,3	20	6	0,06		
		17 XL 037	XA 37017	XC 37017	6F	F10	17	27,49	26,98	32	20	-	14,3	20	6	0,07		
		18 XL 037	XA 37018	XC 37018	6F	F11	18	29,11	28,60	35	20	-	14,3	20	6	0,08		
		19 XL 037	XA 37019	XC 37019	6F	F11	19	30,72	30,22	35	20	-	14,3	22	6	0,09		
		20 XL 037	XA 37020	XC 37020	6F	F14	20	32,34	31,83	38	23,5	-	14,3	22	6	0,11		
		21 XL 037	XA 37021	XC 37021	6F	F14	21	33,96	33,45	38	23,5	-	14,3	22	6	0,12		
		22 XL 037	XA 37022	XC 37022	6F	F15	22	35,57	35,07	42	25	-	14,3	22	6	0,13		
		24 XL 037	XA 37024	XC 37024	6F	F17	24	38,81	38,30	44	30	-	14,3	22	6	0,15		
		26 XL 037	XA 37026	XC 37026	6F	F18	26	42,04	41,53	48	30	-	14,3	22	8	0,19		
		27 XL 037	XA 37027	XC 37027	6F	F18	27	43,66	43,15	48	34	-	14,3	22	8	0,20		
		28 XL 037	XA 37028	XC 37028	6F	F19	28	45,28	44,77	51	34	-	14,3	22	8	0,22		
		29 XL 037	XA 37029	XC 37029	6F	F19	29	46,89	46,39	51	34	-	14,3	22	8	0,22		
		ALTERN.	BEZ BANDY	30 XL 037	XA 37030	XC 37030	6F	F20	30	48,51	48,00	54	38	-	14,3	22	8	0,11
				32 XL 037	XA 37032	XC 37032	6F	F20	32	51,74	51,24	57	38	-	14,3	25	8	0,12
34 XL 037	XA 37034			XC 37034	6		34	54,98	54,47	-	45	-	14,3	25	8	0,12		
35 XL 037	XA 37035			XC 37035	6		35	56,60	56,09	-	45	-	14,3	25	8	0,12		
36 XL 037	XA 37036			XC 37036	6		36	58,21	57,70	-	45	-	14,3	25	8	0,13		
38 XL 037	XA 37038			XC 37038	6		38	61,45	60,94	-	45	-	14,3	25	8	0,14		
39 XL 037	XA 37039			XC 37039	6		39	63,06	62,56	-	45	-	14,3	25	8	0,16		
40 XL 037	XA 37040			XC 37040	6		40	64,68	64,17	-	45	-	14,3	25	8	0,17		
41 XL 037	XA 37041			XC 37041	6		41	66,30	65,79	-	45	-	14,3	25	8	0,17		
42 XL 037	XA 37042			XC 37042	6		42	67,91	67,41	-	45	-	14,3	25	8	0,18		
43 XL 037	XA 37043			XC 37043	6		43	69,53	69,02	-	45	-	14,3	25	8	0,19		
44 XL 037	XA 37044			XC 37044	6		44	71,15	70,64	-	45	-	14,3	25	8	0,19		
45 XL 037	XA 37045			XC 37045	6W		45	72,77	72,26	-	45	61	14,3	25	8	0,19		
46 XL 037	XA 37046			XC 37046	6W		46	74,38	73,87	-	45	61	14,3	25	8	0,19		
47 XL 037	XA 37047			XC 37047	6W		47	76,00	75,49	-	45	61	14,3	25	8	0,19		
48 XL 037	XA 37048			XC 37048	6W		48	77,62	77,11	-	45	61	14,3	25	8	0,19		
49 XL 037	XA 37049			XC 37049	6W		49	79,23	78,73	-	45	61	14,3	25	8	0,22		
52 XL 037	XA 37052			XC 37052	6W		52	84,08	83,58	-	45	67	14,3	25	8	0,22		
56 XL 037	XA 37056			XC 37056	6W		56	90,55	90,04	-	45	80	14,3	25	8	0,25		
57 XL 037	XA 37057			XC 37057	6W		57	92,17	91,66	-	45	80	14,3	25	8	0,25		
58 XL 037	XA 37058	XC 37058	6W		58	93,79	93,28	-	45	80	14,3	25	8	0,25				
59 XL 037	XA 37059	XC 37059	6W		59	95,40	94,90	-	45	80	14,3	25	8	0,25				
60 XL 037	XA 37060	XC 37060	6W		60	97,02	96,51	-	45	80	14,3	25	8	0,25				
68 XL 037	XA 37068	XC 37068	6W		68	109,96	109,45	-	45	100	14,3	25	8	0,30				
69 XL 037	XA 37069	XC 37069	6W		69	111,57	111,07	-	45	100	14,3	25	8	0,30				
70 XL 037	XA 37070	XC 37070	6W		70	113,19	112,68	-	45	100	14,3	25	8	0,30				
71 XL 037	XA 37071	XC 37071	6W		71	114,81	114,30	-	45	100	14,3	25	8	0,30				
72 XL 037	XA 37072	XC 37072	6W		72	116,42	115,92	-	45	100	14,3	25	8	0,30				

L 050 - 3/8" (9,525 mm)


WŁAŚCIWOŚCI	SYMBOL FABRYCZNY	NASZ KOD	TYP	TYP BANDY	LICZBA ZĘBÓW	Dp	De	Df	Dm	Di	F	L	OTWÓR PILOTOWY	MASA
STAL	Z BANDA	10 L 050	6F	F13	10	30,32	29,56	37	20	-	19,0	28	8	0,11
		11 L 050	6F	F13	11	33,35	32,35	37	22	-	19,0	30	8	0,14
		12 L 050	6F	F16	12	36,38	36,38	43	24	-	19,0	30	8	0,17
		13 L 050	6F	F17	13	39,41	39,41	44	28	-	19,0	30	8	0,18
		14 L 050	6F	F18	14	42,45	42,45	48	28	-	19,0	30	8	0,22
		15 L 050	6F	F19	15	45,48	45,48	51	34	-	19,0	30	8	0,28
		16 L 050	6F	F20	16	48,51	48,51	54	36	-	19,0	32	8	0,35
		17 L 050	6F	F21	17	51,54	51,54	57	36	-	19,0	32	10	0,36
		18 L 050	6F	F22	18	54,57	54,57	60	40	-	19,0	32	10	0,42
		19 L 050	6F	F24	19	57,61	57,61	64	40	-	19,0	32	10	0,45
		20 L 050	6F	F25	20	60,64	60,64	66	40	-	19,0	32	10	0,48
		21 L 050	6F	F26	21	63,67	63,67	70	45	-	19,0	32	10	0,57
		22 L 050	6F	F27	22	66,70	66,70	75	45	-	19,0	32	10	0,59
		23 L 050	6F	F28	23	69,73	69,73	79	55	-	19,0	32	10	0,61
		24 L 050	6F	F28	24	72,77	72,77	79	55	-	19,0	32	10	0,80
		25 L 050	6F	F29	25	75,80	75,80	83	58	-	19,0	32	10	0,85
		26 L 050	6F	F30	26	78,83	78,83	87	58	-	19,0	32	11	0,90
		27 L 050	6F	F30	27	81,86	81,86	87	58	-	19,0	32	11	0,91
		28 L 050	6F	F31	28	84,89	84,89	91	58	-	19,0	32	11	0,95
		29 L 050	6F	F32	29	87,93	87,93	93	58	-	19,0	32	11	1,00
		30 L 050	6F	F33	30	90,96	90,96	97	70	-	19,0	32	11	1,07
		32 L 050	6F	F34	32	97,02	97,02	102	70	-	19,0	32	11	1,23
		33 L 050	6F	F35	33	100,05	99,29	106	70	-	19,0	32	11	1,30
		34 L 050	6F	F36	34	103,08	102,32	112	70	-	19,0	32	11	1,37
		35 L 050	6F	F36	35	106,12	105,35	112	70	-	19,0	32	11	1,44
		36 L 050	6F	F37	36	109,15	108,39	115	70	-	19,0	32	11	1,50
		40 L 050	6WF	F40	40	121,28	120,51	128	70	100	19,0	32	11	1,77
		41 L 050	6WF	F41	41	124,31	123,55	131	70	103	19,0	32	11	1,84
		42 L 050	6WF	F42	42	127,34	126,58	135	70	106	19,0	32	11	1,97
		44 L 050	6WF	F45	44	133,40	132,64	142	70	112	19,0	32	11	2,20
		45 L 050	6WF	F45	45	136,44	135,67	142	70	115	19,0	32	11	2,27
		47 L 050	6WF	F48	47	142,50	141,74	150	70	121	19,0	32	11	2,45
		48 L 050	6WF	F48	48	145,53	144,77	150	70	124	19,0	32	11	2,67
ŻELIWO	BEZ BANDY	49 L 050	6W		49	148,56	147,80	-	70	127	19,0	32	14	1,80
		50 L 050	6W		50	151,60	150,83	-	70	130	19,0	32	14	1,90
		52 L 050	6W		52	157,66	156,90	-	70	136	19,0	32	14	2,10
		56 L 050	6W		56	169,79	169,02	-	70	149	19,0	32	14	2,16
		57 L 050	6W		57	172,82	172,06	-	70	152	19,0	32	14	2,47
		60 L 050	6W		60	181,91	181,15	-	75	160	19,0	42	14	3,10
		65 L 050	6A		65	197,07	196,31	-	75	176	19,0	42	14	3,20
		66 L 050	6A		66	200,11	199,34	-	75	179	19,0	42	14	3,23
		72 L 050	6A		72	218,30	217,53	-	75	197	19,0	42	14	4,86
		84 L 050	6A		84	254,68	253,92	-	75	233	19,0	42	14	5,00
		90 L 050	6A		90	272,87	272,11	-	75	252	19,0	42	14	5,50
		96 L 050	6A		96	291,06	290,30	-	75	269	19,0	42	14	6,00
		120 L 050	6A		120	363,83	363,07	-	75	342	19,0	42	14	8,50

L 075 - 3/8" (9,525 mm)


WŁAŚCIWOŚCI	SYMBOL FABRYCZNY	NASZ KOD	TYP	TYP BANDY	LICZBA ZĘBÓW	Dp	De	Df	Dm	Di	F	L	OTWÓR PILOTOWY	MASA
STAL	Z BANDA	10 L 075	6F	F13	10	30,32	29,56	37	20	-	25,4	38	8	0,15
		11 L 075	6F	F13	11	33,35	32,35	37	22	-	25,4	38	8	0,17
		12 L 075	6F	F16	12	36,38	36,38	43	24	-	25,4	38	8	0,22
		13 L 075	6F	F17	13	39,41	39,41	44	28	-	25,4	38	8	0,25
		14 L 075	6F	F18	14	42,45	42,45	48	28	-	25,4	38	11	0,26
		15 L 075	6F	F19	15	45,48	45,48	51	34	-	25,4	38	11	0,38
		16 L 075	6F	F20	16	48,51	48,51	54	36	-	25,4	38	11	0,43
		17 L 075	6F	F21	17	51,54	51,54	57	36	-	25,4	38	11	0,44
		18 L 075	6F	F22	18	54,57	54,57	60	40	-	25,4	38	11	0,52
		19 L 075	6F	F24	19	57,61	57,61	64	40	-	25,4	38	11	0,56
		20 L 075	6F	F25	20	60,64	60,64	66	40	-	25,4	38	11	0,59
		21 L 075	6F	F26	21	63,67	63,67	70	45	-	25,4	38	11	0,64
		22 L 075	6F	F27	22	66,70	66,70	75	45	-	25,4	38	11	0,69
		23 L 075	6F	F28	23	69,73	69,73	79	55	-	25,4	38	11	0,76
		24 L 075	6F	F28	24	72,77	72,77	79	55	-	25,4	38	11	0,87
		25 L 075	6F	F29	25	75,80	75,80	83	58	-	25,4	38	11	0,95
		26 L 075	6F	F30	26	78,83	78,83	87	58	-	25,4	38	11	1,06
		27 L 075	6F	F30	27	81,86	81,86	87	58	-	25,4	38	11	1,18
		28 L 075	6F	F31	28	84,89	84,89	91	58	-	25,4	38	11	1,19
		29 L 075	6F	F32	29	87,93	87,93	93	58	-	25,4	38	11	1,25
		30 L 075	6F	F33	30	90,96	90,96	97	70	-	25,4	38	11	1,33
		32 L 075	6F	F34	32	97,02	97,02	102	70	-	25,4	38	11	1,54
		33 L 075	6F	F35	33	100,05	99,29	106	70	-	25,4	38	11	1,63
		34 L 075	6F	F36	34	103,08	102,32	112	70	-	25,4	38	11	1,37
		35 L 075	6F	F36	35	106,12	105,35	112	70	-	25,4	38	11	1,80
		36 L 075	6F	F37	36	109,15	108,39	115	70	-	25,4	38	11	1,89
		40 L 075	6WF	F40	40	121,28	120,51	128	70	100	25,4	38	11	2,35
		41 L 075	6WF	F41	41	124,31	123,55	131	70	103	25,4	38	11	2,40
		42 L 075	6WF	F42	42	127,34	126,58	135	70	106	25,4	38	11	2,53
		44 L 075	6WF	F45	44	133,40	132,64	142	70	112	25,4	38	11	2,75
		45 L 075	6WF	F45	45	136,44	135,67	142	70	115	25,4	38	11	2,86
		47 L 075	6WF	F48	47	142,50	141,74	150	70	121	25,4	38	11	3,02
		48 L 075	6WF	F48	48	145,53	144,77	150	70	124	25,4	38	11	3,19
ŻELIWO	BEZ BANDY	49 L 075	6W		49	148,56	147,80	-	70	127	25,4	38	14	2,10
		50 L 075	6W		50	151,60	150,83	-	70	130	25,4	38	14	2,20
		52 L 075	6W		52	157,66	156,90	-	70	136	25,4	38	14	2,38
		56 L 075	6W		56	169,79	169,02	-	70	149	25,4	38	14	2,49
		57 L 075	6W		57	172,82	172,06	-	70	152	25,4	38	14	2,73
		60 L 075	6W		60	181,91	181,15	-	75	160	25,4	45	14	3,44
		65 L 075	6A		65	197,07	196,31	-	75	176	25,4	45	14	3,50
		66 L 075	6A		66	200,11	199,34	-	75	179	25,4	45	14	3,60
		72 L 075	6A		72	218,30	217,53	-	75	197	25,4	45	14	4,58
		84 L 075	6A		84	254,68	253,92	-	75	233	25,4	45	14	5,60
		90 L 075	6A		90	272,87	272,11	-	75	252	25,4	45	14	6,50
		96 L 075	6A		96	291,06	290,30	-	75	269	25,4	45	14	7,00
		120 L 075	6A		120	363,83	363,07	-	75	342	25,4	45	14	10,00




TYP 6F



TYP 6WF



TYP 6W



TYP 6A

L 100 - 3/8" (9,525 mm)

WŁAŚCIWOŚCI	SYMBOL FABRYCZNY	NASZ KOD	TYP	TYP BANDY	LICZBA ZĘBÓW	Dp	De	Df	Dm	Di	F	L	OTWÓR PILOTOWY	MASA
STAL	Z BANDA	10 L 100	6F	F13	10	30,32	29,56	37	20		31,8	45	8	0,15
		11 L 100	6F	F14	11	33,35	32,35	37	22		31,8	45	8	0,20
		12 L 100	6F	F16	12	36,38	36,38	43	24	-	31,8	45	8	0,26
		13 L 100	6F	F17	13	39,41	39,41	44	28	-	31,8	45	8	0,30
		14 L 100	6F	F18	14	42,45	42,45	48	28	-	31,8	45	11	0,34
		15 L 100	6F	F19	15	45,48	45,48	51	34	-	31,8	45	11	0,45
		16 L 100	6F	F20	16	48,51	48,51	54	36	-	31,8	45	11	0,52
		17 L 100	6F	F21	17	51,54	51,54	57	36	-	31,8	45	11	0,53
		18 L 100	6F	F22	18	54,57	54,57	60	40	-	31,8	45	11	0,62
		19 L 100	6F	F24	19	57,61	57,61	64	40	-	31,8	45	11	0,66
		20 L 100	6F	F25	20	60,64	60,64	66	40	-	31,8	45	11	0,72
		21 L 100	6F	F26	21	63,67	63,67	70	45	-	31,8	45	11	0,77
		22 L 100	6F	F27	22	66,70	66,70	75	45	-	31,8	45	11	0,88
		23 L 100	6F	F28	23	69,73	69,73	79	55	-	31,8	45	11	1,12
		24 L 100	6F	F28	24	72,77	72,77	79	55	-	31,8	45	11	1,13
		25 L 100	6F	F29	25	75,80	75,80	83	58	-	31,8	45	11	1,18
		26 L 100	6F	F30	26	78,83	78,83	87	58	-	31,8	45	11	1,24
		27 L 100	6F	F30	27	81,86	81,86	87	58	-	31,8	45	11	1,35
		28 L 100	6F	F31	28	84,89	84,89	91	58	-	31,8	45	11	1,42
		29 L 100	6F	F32	29	87,93	87,93	93	58	-	31,8	45	11	1,50
		30 L 100	6F	F33	30	90,96	90,96	97	70	-	31,8	45	11	1,61
		32 L 100	6F	F34	32	97,02	97,02	102	70	-	31,8	45	11	1,84
		33 L 100	6F	F35	33	100,05	99,29	106	70	-	31,8	45	11	1,95
		34 L 100	6F	F36	34	103,08	102,32	112	70	-	31,8	45	11	2,10
		35 L 100	6F	F36	35	106,12	105,35	112	70	-	31,8	45	11	2,23
		36 L 100	6F	F37	36	109,15	108,39	115	70	-	31,8	45	11	2,32
		40 L 100	6WF	F40	40	121,28	120,51	128	70	100	31,8	45	11	2,80
		41 L 100	6WF	F41	41	124,31	123,55	131	70	103	31,8	45	11	2,95
		42 L 100	6WF	F42	42	127,34	126,58	135	70	106	31,8	45	11	3,10
		44 L 100	6WF	F45	44	133,40	132,64	142	70	112	31,8	45	11	3,36
		45 L 100	6WF	F45	45	136,44	135,67	142	70	115	31,8	45	11	3,45
		47 L 100	6WF	F48	47	142,50	141,74	150	70	121	31,8	45	11	3,65
		48 L 100	6WF	F48	48	145,53	144,77	150	70	124	31,8	45	11	3,86
ŻELIWO	BEZ BANDY	49 L 100	6W		49	148,56	147,80	-	70	127	31,8	45	14	2,40
		50 L 100	6W		50	151,60	150,83	-	70	130	31,8	45	14	2,50
		52 L 100	6W		52	157,66	156,90	-	70	136	31,8	45	14	2,70
		56 L 100	6W		56	169,79	169,02	-	70	149	31,8	45	14	2,91
		57 L 100	6W		57	172,82	172,06	-	70	152	31,8	45	14	3,10
		60 L 100	6W		60	181,91	181,15	-	75	160	31,8	50	14	3,55
		65 L 100	6A		65	197,07	196,31	-	75	176	31,8	50	14	4,00
		66 L 100	6A		66	200,11	199,34	-	75	179	31,8	50	14	4,15
		72 L 100	6A		72	218,30	217,53	-	75	197	31,8	50	14	5,00
		84 L 100	6A		84	254,68	253,92	-	75	233	31,8	50	14	6,30
		90 L 100	6A		90	272,87	272,11	-	75	252	31,8	50	14	7,50
		96 L 100	6A		96	291,06	290,30	-	75	269	31,8	50	14	8,20
		120 L 100	6A		120	363,83	363,07	-	75	342	31,8	50	14	11,50

H 075 - 1/2" (12,7 mm)


WŁAŚCIWOŚCI	SYMBOL FABRYCZNY	NASZ KOD	TYP	TYP BANDY	LICZBA ZĘBÓW	Dp	De	Df	Dm	Di	F	L	OTWÓR PILOTOWY	MASA
STAL	Z BANDA	14 L 100	6F	F24	14	56,60	55,22	64	40	-	26,4	40	8	0,59
		15 L 100	6F	F25	15	60,64	59,27	66	45	-	26,4	40	8	0,65
		16 L 100	6F	F26	16	64,68	63,31	70	45	-	26,4	40	8	0,70
		17 L 100	6F	F27	17	68,72	67,35	75	45	-	26,4	40	8	0,73
		18 L 100	6F	F28	18	72,77	71,39	79	55	-	26,4	40	11	0,91
		19 L 100	6F	F29	19	76,81	75,44	83	60	-	26,4	40	11	1,08
		20 L 100	6F	F30	20	80,85	79,48	87	62	-	26,4	40	11	1,18
		21 L 100	6F	F31	21	84,89	83,52	91	65	-	26,4	40	11	1,30
		22 L 100	6F	F32	22	88,94	87,56	93	68	-	26,4	40	11	1,42
		23 L 100	6F	F33	23	92,98	91,61	97	72	-	26,4	40	11	1,67
		24 L 100	6F	F34	24	97,02	95,65	102	72	-	26,4	40	11	1,71
		25 L 100	6F	F35	25	101,06	99,69	106	72	-	26,4	40	11	1,87
		26 L 100	6F	F36	26	105,11	103,73	112	80	-	26,4	40	11	2,00
		27 L 100	6F	F37	27	109,15	107,78	115	80	-	26,4	40	11	2,10
		28 L 100	6F	F38	28	113,19	111,82	120	80	-	26,4	40	11	2,26
		29 L 100	6F	F39	29	117,23	115,86	123	80	-	26,4	40	11	2,49
		30 L 100	6F	F40	30	121,28	119,90	128	80	-	26,4	40	11	2,70
		32 L 100	6F	F42	32	129,36	127,99	135	80	-	26,4	40	11	2,85
		33 L 100	6F	F44	33	133,40	132,03	140	80	-	26,4	40	11	3,10
		34 L 100	6F	F45	34	137,45	136,07	142	80	-	26,4	40	11	3,30
		35 L 100	6F	F48	35	141,49	140,12	150	80	-	26,4	40	11	3,50
		36 L 100	6F	F48	36	145,53	144,16	150	80	118	26,4	40	11	3,65
		38 L 100	6F	F50	38	153,62	152,24	158	80	126	26,4	40	11	3,90
		40 L 100	6F	F52	40	161,70	160,33	168	80	134	26,4	40	11	4,23
		42 L 100	6F	F53	42	169,79	168,41	175	80	140	26,4	40	11	4,80
ŻELIWO	Z BANDA	44 L 100	6WF	F55	44	177,87	176,50	184	80	150	26,4	40	14	5,20
		45 L 100	6WF	F57	45	181,91	180,54	192	80	154	26,4	40	14	5,45
		48 L 100	6WF	F59	48	194,04	192,67	200	90	166	26,4	45	14	4,30
	BEZ BANDY	49 L 100	6W		49	198,08	196,71	-	90	170	26,4	45	14	4,50
		50 L 100	6W		50	202,13	200,75	-	90	174	26,4	45	14	4,66

H 100 - 1/2" (12,7 mm)


WŁAŚCIWOŚCI	SYMBOL FABRYCZNY	NASZ KOD	TYP	TYP BANDY	LICZBA ZĘBÓW	Dp	De	Df	Dm	Di	F	L	OTWÓR PILOTOWY	MASA
STAL	Z BANDA	14 H 100	6F	F24	14	56,60	55,22	64	45	-	31,8	45	11	0,67
		15 H 100	6F	F25	15	60,64	59,27	66	45	-	31,8	45	11	0,77
		16 H 100	6F	F26	16	64,68	63,31	70	45	-	31,8	45	11	0,88
		17 H 100	6F	F27	17	68,72	67,35	75	45	-	31,8	45	11	0,88
		18 H 100	6F	F28	18	72,77	71,39	79	55	-	31,8	45	14	1,06
		19 H 100	6F	F29	19	76,81	75,44	83	60	-	31,8	45	14	1,23
		20 H 100	6F	F30	20	80,85	79,48	87	62	-	31,8	45	14	1,33
		21 H 100	6F	F31	21	84,89	83,52	91	65	-	31,8	45	14	1,43
		22 H 100	6F	F32	22	88,94	87,56	93	68	-	31,8	45	14	1,63
		23 H 100	6F	F33	23	92,98	91,61	97	72	-	31,8	45	14	1,85
		24 H 100	6F	F34	24	97,02	95,65	102	72	-	31,8	45	14	1,93
		25 H 100	6F	F35	25	101,06	99,69	106	72	-	31,8	45	14	2,07
		26 H 100	6F	F36	26	105,11	103,73	112	80	-	31,8	45	14	2,30
		27 H 100	6F	F37	27	109,15	107,78	115	80	-	31,8	45	14	2,40
		28 H 100	6F	F38	28	113,19	111,82	120	80	-	31,8	45	14	2,53
		29 H 100	6F	F39	29	117,23	115,86	123	80	-	31,8	45	14	2,70
		30 H 100	6F	F40	30	121,28	119,90	128	80	-	31,8	45	14	2,93
		32 H 100	6F	F42	32	129,36	127,99	135	80	-	31,8	45	14	3,06
		33 H 100	6F	F44	33	133,40	132,03	140	80	-	31,8	45	14	3,40
		34 H 100	6F	F45	34	137,45	136,07	142	80	-	31,8	45	14	3,57
		35 H 100	6F	F48	35	141,49	140,12	150	80	-	31,8	45	14	3,80
		36 H 100	6WF	F48	36	145,53	144,16	150	80	118	31,8	45	14	3,92
		38 H 100	6WF	F50	38	153,62	152,24	158	80	123	31,8	45	14	4,40
		40 H 100	6WF	F52	40	161,70	160,33	168	80	134	31,8	45	14	4,95
		42 H 100	6WF	F53	42	169,79	168,41	175	80	140	31,8	45	14	5,60
		44 H 100	6WF	F55	44	177,87	176,50	184	80	150	31,8	50	14	6,20
		45 H 100	6WF	F57	45	181,91	180,54	192	80	154	31,8	50	14	6,45
		48 H 100	6WF	F59	48	194,04	192,67	200	90	166	31,8	50	14	5,30
ŻELIWO	BEZ BANDY	49 H 100	6W		49	198,08	196,71	-	90	170	31,8	50	19	7,00
		50 H 100	6W		50	202,13	200,75	-	90	174	31,8	50	19	7,10
		52 H 100	6W		52	210,21	208,84	-	90	182	31,8	50	19	7,30
		58 H 100	6A		58	234,47	233,09	-	90	207	31,8	50	19	8,10
		60 H 100	6A		60	242,55	241,18	-	90	215	31,8	50	19	8,50
		70 H 100	6A		70	282,98	281,61	-	100	255	31,8	50	19	10,50
		72 H 100	6A		72	291,06	289,69	-	100	263	31,8	50	19	11,00
		82 H 100	6A		82	331,49	330,12	-	100	304	31,8	50	19	12,00
		84 H 100	6A		84	339,57	338,20	-	100	312	31,8	50	19	13,00
		94 H 100	6A		94	380,00	378,63	-	120	352	31,8	60	19	16,00
		96 H 100	6A		96	388,08	386,71	-	120	360	31,8	60	19	16,00
		106 H 100	6A		106	428,51	427,14	-	120	401	31,8	60	19	19,50
		116 H 100	6A		116	468,93	467,56	-	120	441	31,8	60	19	22,00
		118 H 100	6A		116	477,02	475,65	-	120	449	31,8	60	19	23,50
		120 H 100	6A		120	485,10	483,73	-	120	458	31,8	60	19	25,00
		150 H 100	6A		150	606,38	605,01	-	120	579	31,8	60	19	31,50
		152 H 100	6A		152	614,47	613,09	-	120	587	31,8	60	19	33,00
		154 H 100	6A		154	622,55	621,18	-	120	595	31,8	60	19	34,50
		156 H 100	6A		158	630,64	629,26	-	120	603	31,8	60	19	36,00

H 150 - 1/2" (12,7 mm)


WŁAŚCIWOŚCI		SYMBOL FABRYCZNY	NASZ KOD	TYP	TYP BANDY	LICZBA ZĘBÓW	Dp	De	Df	Dm	Di	F	L	OTWÓR PILOTOWY	MASA		
STAL	Z BANDA	14 H 150	H 150014	6F	F24	14	56,65	55,22	64	42	-	46,0	58	11	0,91		
		15 H 150	H 150015	6F	F25	15	65,64	59,27	66	45	-	46,0	58	11	0,99		
		16 H 150	H 150016	6F	F26	16	64,68	63,31	70	45	-	46,0	58	11	1,08		
		17 H 150	H 150017	6F	F27	17	68,72	67,35	75	45	-	46,0	58	11	1,15		
		18 H 150	H 150018	6F	F28	18	72,77	71,39	79	55	-	46,0	58	14	1,45		
		19 H 150	H 150019	6F	F29	19	76,81	75,44	83	65	-	46,0	58	14	1,55		
		20 H 150	H 150020	6F	F30	20	80,85	79,48	87	62	-	46,0	58	14	1,66		
		21 H 150	H 150021	6F	F31	21	84,89	83,52	91	65	-	46,0	58	14	1,87		
		22 H 150	H 150022	6F	F32	22	88,94	87,56	93	68	-	46,0	58	14	2,07		
		23 H 150	H 150023	6F	F33	23	92,98	91,61	97	72	-	46,0	58	14	2,28		
		24 H 150	H 150024	6F	F34	24	97,02	95,65	102	72	-	46,0	58	14	2,50		
		25 H 150	H 150025	6F	F35	25	101,06	99,69	106	72	-	46,0	58	14	2,71		
		26 H 150	H 150026	6F	F36	26	105,11	103,73	112	80	-	46,0	58	14	2,99		
		27 H 150	H 150027	6F	F37	27	109,15	107,78	115	80	-	46,0	58	14	3,15		
		28 H 150	H 150028	6F	F38	28	113,19	111,82	120	80	-	46,0	58	14	3,39		
		29 H 150	H 150029	6F	F39	29	117,23	115,86	123	80	-	46,0	58	14	3,57		
		30 H 150	H 150030	6F	F40	30	121,28	119,90	128	80	-	46,0	58	14	3,86		
		32 H 150	H 150032	6F	F42	32	129,36	127,99	135	80	-	46,0	58	14	4,37		
		33 H 150	H 150033	6F	F44	33	133,40	132,03	140	80	-	46,0	58	14	4,66		
		34 H 150	H 150034	6F	F45	34	137,45	136,07	142	80	-	46,0	58	14	4,98		
		35 H 150	H 150035	6F	F48	35	141,49	140,12	150	80	-	46,0	58	14	5,30		
		36 H 150	H 150036	6WF	F48	36	145,53	144,16	150	80	118	46,0	58	14	5,50		
		38 H 150	H 150038	6WF	F50	38	153,62	152,24	158	80	123	46,0	58	14	6,10		
		40 H 150	H 150040	6WF	F52	40	161,70	160,33	168	80	134	46,0	58	14	6,80		
		42 H 150	H 150042	6WF	F53	42	169,79	168,41	175	80	140	46,0	58	19	7,60		
		ŻELIWO	BEZ BANDY	44 H 150	H 150044	6WF	F55	44	177,87	176,50	184	80	150	46,0	58	19	8,50
				45 H 150	H 150045	6WF	F57	45	181,91	180,54	192	80	154	46,0	58	19	9,00
				48 H 150	H 150048	6WF	F59	48	194,04	192,67	200	90	166	46,0	65	19	6,70
49 H 150	H 150049			6W		49	198,08	196,71	-	90	170	46,0	65	19	7,00		
50 H 150	H 150050			6W		50	202,13	200,75	-	90	174	46,0	65	19	7,10		
52 H 150	H 150052			6W		52	210,21	208,84	-	90	182	46,0	65	19	7,30		
58 H 150	H 150058			6A		58	234,47	233,09	-	90	207	46,0	65	19	8,10		
60 H 150	H 150060			6A		60	242,55	241,18	-	90	215	46,0	65	19	9,00		
70 H 150	H 150070			6A		70	282,98	281,61	-	100	255	46,0	65	24	10,50		
72 H 150	H 150072			6A		72	291,06	289,69	-	100	263	46,0	65	24	11,00		
82 H 150	H 150082			6A		82	331,49	330,12	-	100	304	46,0	65	24	12,00		
84 H 150	H 150084			6A		84	339,57	338,20	-	100	312	46,0	65	24	13,00		
94 H 150	H 150094			6A		94	380,00	378,63	-	120	352	46,0	65	24	16,00		
96 H 150	H 150096			6A		96	388,08	386,71	-	120	360	46,0	65	24	17,00		
106 H 150	H 150106			6A		106	428,51	427,14	-	120	401	46,0	65	24	19,50		
116 H 150	H 150116			6A		116	468,93	467,56	-	120	441	46,0	65	24	22,00		
118 H 150	H 150118			6A		116	477,02	475,65	-	120	449	46,0	65	24	23,50		
120 H 150	H 150120			6A		120	485,10	483,73	-	120	458	46,0	65	24	25,00		
150 H 150	H 150150			6A		150	606,38	605,01	-	120	579	46,0	65	24	31,50		
152 H 150	H 150152			6A		152	614,47	613,09	-	120	587	46,0	65	24	33,00		
154 H 150	H 150154	6A		154	622,55	621,18	-	120	595	46,0	65	24	34,50				
156 H 150	H 150156	6A		158	630,64	629,26	-	120	603	46,0	65	24	36,00				




TYP 6F



TYP 6WF



TYP 6W



TYP 6A

H 200 - 1/2" (12,75 mm)

WŁAŚCIWOŚCI	SYMBOL FABRYCZNY	NASZ KOD	TYP	TYP BANDY	LICZBA ZĘBÓW	Dp	De	Df	Dm	Di	F	L	OTWÓR PILOTOWY	MASA
STAL	Z BANDA	14 H 200	6F	F24	14	56,60	55,22	64	42	-	56,7	70	11	1,13
		15 H 200	6F	F25	15	60,64	59,27	66	45	-	56,7	70	11	1,21
		16 H 200	6F	F26	16	64,68	63,31	70	45	-	56,7	70	11	1,30
		17 H 200	6F	F27	17	68,72	67,35	75	45	-	56,7	70	11	1,45
		18 H 200	6F	F28	18	72,77	71,39	79	55	-	56,7	70	14	1,65
		19 H 200	6F	F29	19	76,81	75,44	83	60	-	56,7	70	14	1,90
		20 H 200	6F	F30	20	80,85	79,48	87	62	-	56,7	70	14	2,11
		21 H 200	6F	F31	21	84,89	83,52	91	65	-	56,7	70	14	2,23
		22 H 200	6F	F32	22	88,94	87,56	93	68	-	56,7	70	14	2,45
		23 H 200	6F	F33	23	92,98	91,61	97	72	-	56,7	70	14	2,71
		24 H 200	6F	F34	24	97,02	95,65	102	72	-	56,7	70	14	2,97
		25 H 200	6F	F35	25	101,06	99,69	106	72	-	56,7	70	14	3,32
		26 H 200	6F	F36	26	105,11	103,73	112	80	-	56,7	70	14	3,61
		27 H 200	6F	F37	27	109,15	107,78	115	80	-	56,7	70	14	3,90
		28 H 200	6F	F38	28	113,19	111,82	120	80	-	56,7	70	14	4,10
		29 H 200	6F	F39	29	117,23	115,86	123	80	-	56,7	70	14	4,42
		30 H 200	6F	F40	30	121,28	119,90	128	80	-	56,7	70	14	4,74
		32 H 200	6F	F42	32	129,36	127,99	135	80	-	56,7	70	14	5,60
		33 H 200	6F	F44	33	133,40	132,03	140	80	-	56,7	70	14	5,90
		34 H 200	6F	F45	34	137,45	136,07	142	80	-	56,7	70	14	6,20
		35 H 200	6F	F48	35	141,49	140,12	150	80	-	56,7	70	14	6,60
		36 H 200	6WF	F48	36	145,53	144,16	150	80	118	56,7	70	14	7,10
		38 H 200	6WF	F50	38	153,62	152,24	158	80	123	56,7	70	14	7,80
		40 H 200	6WF	F52	40	161,70	160,33	168	80	134	56,7	70	14	8,40
		42 H 200	6WF	F53	42	169,79	168,41	175	80	140	56,7	70	19	9,70
ŻELIWO	BEZ BANDY	44 H 200	6WF	F55	44	177,87	176,50	184	80	150	56,7	70	14	10,50
		45 H 200	6WF	F57	45	181,91	180,54	192	80	154	56,7	70	19	11,30
		48 H 200	6WF	F59	48	194,04	192,67	200	90	166	56,7	75	24	8,60
		49 H 200	6W		49	198,08	196,71	-	90	170	56,7	75	24	7,60
		50 H 200	6W		50	202,13	200,75	-	90	174	56,7	75	24	8,30
		52 H 200	6W		52	210,21	208,84	-	90	182	56,7	75	24	8,50
		58 H 200	6A		58	234,47	233,09	-	90	207	56,7	75	24	10,00
		60 H 200	6A		60	242,55	241,18	-	90	215	56,7	75	24	11,00
		70 H 200	6A		70	282,98	281,61	-	100	255	56,7	75	28	12,50
		72 H 200	6A		72	291,06	289,69	-	100	263	56,7	75	28	14,00
		82 H 200	6A		82	331,49	330,12	-	100	304	56,7	75	28	13,50
		84 H 200	6A		84	339,57	338,20	-	100	312	56,7	75	28	15,00
		94 H 200	6A		94	380,00	378,63	-	120	352	56,7	75	28	18,90
		96 H 200	6A		96	388,08	386,71	-	120	360	56,7	75	28	20,30
		106 H 200	6A		106	428,51	427,14	-	120	401	56,7	75	28	22,50
		116 H 200	6A		116	468,93	467,56	-	120	441	56,7	75	28	24,70
		118 H 200	6A		116	477,02	475,65	-	120	449	56,7	75	28	26,00
		120 H 200	6A		120	485,10	483,73	-	120	458	56,7	75	28	28,00
		150 H 200	6A		150	606,38	605,01	-	120	579	56,7	75	28	32,50
		152 H 200	6A		152	614,47	613,09	-	120	587	56,7	75	28	25,00
		154 H 200	6A		154	622,55	621,18	-	120	595	56,7	75	28	38,00
		156 H 200	6A		158	630,64	629,26	-	120	603	56,7	75	28	41,00

H 300 - 1/2" (12,75 mm)

WŁAŚCIWOŚCI		SYMBOL FABRYCZNY	NASZ KOD	TYP	TYP BANDY	LICZBA ZĘBÓW	Dp	De	Df	Dm	Di	F	L	OTWÓR PILOTOWY	MASA
STAL	Z BANDA	14 H 300	H 300014	6F	F24	14	56,60	55,22	64	42	-	85,7	100	11	1,35
		15 H 300	H 300015	6F	F25	15	60,64	59,27	66	45	-	85,7	100	11	1,55
		16 H 300	H 300016	6F	F26	16	64,68	63,31	70	45	-	85,7	100	11	1,80
		17 H 300	H 300017	6F	F27	17	68,72	67,35	100	45	-	85,7	100	11	2,10
		18 H 300	H 300018	6F	F28	18	72,77	71,39	79	55	-	85,7	100	19	2,38
		19 H 300	H 300019	6F	F29	19	76,81	100,44	83	60	-	85,7	100	19	2,64
		20 H 300	H 300020	6F	F30	20	80,85	79,48	87	62	-	85,7	100	19	3,10
		21 H 300	H 300021	6F	F31	21	84,89	83,52	91	65	-	85,7	100	19	3,32
		22 H 300	H 300022	6F	F32	22	88,94	87,56	93	68	-	85,7	100	19	3,67
		23 H 300	H 300023	6F	F33	23	92,98	91,61	97	72	-	85,7	100	19	4,00
		24 H 300	H 300024	6F	F34	24	97,02	95,65	102	72	-	85,7	100	19	4,40
		25 H 300	H 300025	6F	F35	25	101,06	99,69	106	72	-	85,7	100	19	4,79
		26 H 300	H 300026	6F	F36	26	105,11	103,73	112	80	-	85,7	100	19	5,20
		27 H 300	H 300027	6F	F37	27	109,15	107,78	115	80	-	85,7	100	19	5,60
		28 H 300	H 300028	6F	F38	28	113,19	111,82	120	80	-	85,7	100	19	5,60
		29 H 300	H 300029	6F	F39	29	117,23	115,86	123	80	-	85,7	100	19	6,00
		30 H 300	H 300030	6F	F40	30	121,28	119,90	128	80	-	85,7	100	19	7,00
		32 H 300	H 300032	6F	F42	32	129,36	127,99	135	80	-	85,7	100	19	7,80
		33 H 300	H 300033	6F	F44	33	133,40	132,03	140	80	-	85,7	100	19	8,70
		34 H 300	H 300034	6F	F45	34	137,45	136,07	142	80	-	85,7	100	19	9,70
		35 H 300	H 300035	6F	F48	35	141,49	140,12	150	80	-	85,7	100	19	9,80
		36 H 300	H 300036	6WF	F48	36	145,53	144,16	150	80	118	85,7	100	19	9,90
		38 H 300	H 300038	6WF	F50	38	153,62	152,24	158	80	123	85,7	100	19	11,00
		40 H 300	H 300040	6WF	F52	40	161,70	160,33	168	80	134	85,7	100	19	12,20
		42 H 300	H 300042	6WF	F53	42	169,79	168,41	175	80	140	85,7	100	19	13,80
ŻELIWO	BEZ BANDY	44 H 300	H 300044	6WF	F55	44	177,87	176,50	184	80	150	85,7	100	19	15,00
		45 H 300	H 300045	6WF	F57	45	181,91	180,54	192	80	154	85,7	100	19	15,20
		48 H 300	H 300048	6WF	F59	48	194,04	192,67	200	90	166	85,7	100	24	11,40
		49 H 300	H 300049	6W		49	198,08	196,71	-	90	170	85,7	100	24	9,40
		50 H 300	H 300050	6W		50	202,13	200,75	-	90	174	85,7	100	24	10,60
		52 H 300	H 300052	6W		52	210,21	208,84	-	90	182	85,7	100	24	11,80
		58 H 300	H 300058	6A		58	234,47	233,09	-	90	207	85,7	100	24	12,20
		60 H 300	H 300060	6A		60	242,55	241,18	-	90	215	85,7	100	24	13,00
		70 H 300	H 300070	6A		70	282,98	281,61	-	100	255	85,7	100	28	16,50
		72 H 300	H 300072	6A		72	291,06	289,69	-	100	263	85,7	100	28	19,00
		82 H 300	H 300082	6A		82	331,49	330,12	-	100	304	85,7	100	28	18,00
		84 H 300	H 300084	6A		84	339,57	338,20	-	100	312	85,7	100	28	20,00
		94 H 300	H 300094	6A		94	380,00	378,63	-	120	352	85,7	100	28	25,50
		96 H 300	H 300096	6A		96	388,08	386,71	-	120	360	85,7	100	28	27,00
		106 H 300	H 300106	6A		106	428,51	427,14	-	120	401	85,7	100	28	27,90
		116 H 300	H 300116	6A		116	468,93	467,56	-	120	441	85,7	100	28	28,50
		118 H 300	H 300118	6A		116	477,02	475,65	-	120	449	85,7	100	28	31,00
		120 H 300	H 300120	6A		120	485,10	483,73	-	120	458	85,7	100	28	33,00
		150 H 300	H 300150	6A		150	606,38	605,01	-	120	579	85,7	100	28	38,00
		152 H 300	H 300152	6A		152	614,47	613,09	-	120	587	85,7	100	28	40,00
154 H 300	H 300154	6A		154	622,55	621,18	-	120	595	85,7	100	28	42,00		
156 H 300	H 300156	6A		158	630,64	629,26	-	120	603	85,7	100	28	44,20		

XH 200 - 7/8" (22,225 mm)


WŁAŚCIWOŚCI		SYMBOL FABRYCZNY	NASZ KOD	TYP	TYP BANDY	LICZBA ZĘBÓW	Dp	De	Df	Dm	Di	F	L	OTWÓR PILOTOWY	MASA
STAL	Z BANDA	18 H 200	H 200018	6F	F44	18	127,34	124,55	140	100	-	65	80	24	5,90
		19 H 200	H 200019	6F	F46	19	134,41	131,62	146	100	-	65	80	24	6,50
		20 H 200	H 200020	6F	F50	20	141,49	128,69	155	100	-	65	80	24	7,20
		21 H 200	H 200021	6F	F51	21	148,56	145,77	160	110	-	65	80	24	7,90
		22 H 200	H 200022	6F	F52	22	155,64	152,84	168	110	-	65	80	24	8,70
		24 H 200	H 200024	6F	F81	24	169,79	166,99	184	120	-	65	80	24	10,60
		25 H 200	H 200025	6F	F56	25	176,86	174,07	188	120	-	65	80	24	11,40
		26 H 200	H 200026	6F	F59	26	183,94	181,14	200	120	-	65	80	24	12,20
		27 H 200	H 200027	6F	F59	27	191,01	188,22	200	120	-	65	80	24	13,50
		28 H 200	H 200028	6F	F61	28	198,08	195,29	212	150	-	65	80	24	14,80
		30 H 200	H 200030	6F	F62	30	212,23	209,44	226	150	-	65	80	24	16,60
		32 H 200	H 200032	6WF	F64	32	226,38	223,59	240	150	184	65	80	24	17,90
		34 H 200	H 200034	6WF	F66	34	240,53	237,74	256	150	198	65	80	24	18,20
		38 H 200	H 200038	6WF	F69	38	268,83	266,03	286	150	227	65	100	28	19,00
ŻELIWO	BEZ BANDY	40 H 200	H 200040	6WF	F70	40	282,98	280,18	296	150	241	65	100	28	22,10
		46 H 200	H 200046	6W		46	325,42	322,63	-	150	283	65	100	28	26,00
		48 H 200	H 200048	6W		48	339,57	336,78	-	150	297	65	100	28	27,60
		50 H 200	H 200050	6W		50	410,32	407,52	-	150	368	65	100	28	27,60
		60 H 200	H 200060	6W		60	424,47	421,67	-	150	382	65	100	28	22,10
		70 H 200	H 200070	6A		70	495,21	492,42	-	190	453	65	100	28	39,00
		72 H 200	H 200072	6A		72	509,36	506,56	-	190	467	65	100	28	42,00
		78 H 200	H 200078	6A		78	551,81	549,01	-	190	510	65	100	28	48,00
		80 H 200	H 200080	6A		80	565,95	563,16	-	190	524	65	100	28	51,00
		82 H 200	H 200082	6A		82	580,10	577,31	-	190	538	65	100	28	54,00
		84 H 200	H 200084	6A		84	594,25	591,46	-	190	552	65	100	28	57,00
		94 H 200	H 200094	6A		94	665,00	662,20	-	190	623	65	100	28	64,00
		96 H 200	H 200096	6A		96	679,15	676,35	-	190	637	65	100	28	67,00
		116 H 200	H 200116	6A		118	834,78	831,99	-	190	792	65	100	28	88,00
		120 H 200	H 200120	6A		120	848,93	846,14	-	190	806	65	100	28	90,00

XH 300 - 7/8" (22,225 mm)


WŁAŚCIWOŚCI		SYMBOL FABRYCZNY	NASZ KOD	TYP	TYP BANDY	LICZBA ZĘBÓW	Dp	De	Df	Dm	Di	F	L	OTWÓR PILOTOWY	MASA
STAL	Z BANDA	18 XH 300	XH 300018	6F	F44	18	127,34	124,55	140	100	-	90,5	110	28	8,90
		19 XH 300	XH 300019	6F	F46	19	134,41	131,62	146	100	-	90,5	110	28	9,20
		20 XH 300	XH 300020	6F	F50	20	141,49	128,69	155	100	-	90,5	110	28	9,50
		21 XH 300	XH 300021	6F	F51	21	148,56	145,77	160	110	-	90,5	110	28	10,80
		22 XH 300	XH 300022	6F	F52	22	155,64	152,84	168	110	-	90,5	110	28	12,10
		24 XH 300	XH 300024	6F	F81	24	169,79	166,99	184	120	-	90,5	110	28	14,10
		25 XH 300	XH 300025	6F	F56	25	176,86	174,07	188	120	-	90,5	110	28	15,40
		26 XH 300	XH 300026	6F	F59	26	183,94	181,14	200	120	-	90,5	110	28	16,70
		27 XH 300	XH 300027	6F	F59	27	191,01	188,22	200	120	-	90,5	110	28	18,40
		28 XH 300	XH 300028	6F	F61	28	198,08	195,29	212	150	-	90,5	110	28	20,20
		30 XH 300	XH 300030	6F	F62	30	212,23	209,44	226	150	-	90,5	110	28	23,80
		32 XH 300	XH 300032	6WF	F64	32	226,38	223,59	240	150	-	90,5	110	28	26,60
		34 XH 300	XH 300034	6WF	F66	34	240,53	237,74	256	150	198	90,5	110	28	29,40
		38 XH 300	XH 300038	6WF	F69	38	268,83	266,03	286	175	227	90,5	120	32	32,00
ŻELIWO	BEZ BANDY	40 XH 300	XH 300040	6WF	F70	40	282,98	280,18	296	175	241	90,5	120	32	37,50
		46 XH 300	XH 300046	6W		46	325,42	322,63	-	175	283	90,5	120	32	32,50
		48 XH 300	XH 300048	6W		48	339,57	336,78	-	175	297	90,5	120	32	34,00
		50 XH 300	XH 300050	6W		50	410,32	407,52	-	175	368	90,5	120	32	37,00
		60 XH 300	XH 300060	6W		60	424,47	421,67	-	175	382	90,5	120	32	39,00
		70 XH 300	XH 300070	6A		70	495,21	492,42	-	175	453	90,5	120	32	53,00
		72 XH 300	XH 300072	6A		72	509,36	506,56	-	175	467	90,5	120	32	55,00
		78 XH 300	XH 300078	6A		78	551,81	549,01	-	175	510	90,5	120	32	62,00
		80 XH 300	XH 300080	6A		80	565,95	563,16	-	175	524	90,5	120	32	64,00
		82 XH 300	XH 300082	6A		82	580,10	577,31	-	175	538	90,5	120	32	66,00
		84 XH 300	XH 300084	6A		84	594,25	591,46	-	175	552	90,5	120	32	69,00
		94 XH 300	XH 300094	6A		94	665,00	662,20	-	175	623	90,5	120	32	81,00
		96 XH 300	XH 300096	6A		96	679,15	676,35	-	175	637	90,5	120	32	85,00
		116 XH 300	XH 300116	6A		118	834,78	831,99	-	175	792	90,5	120	32	116,00
		120 XH 300	XH 300120	6A		120	848,93	846,14	-	175	806	90,5	120	32	121,00

XH 400 - 7/8" (22,225 mm)


WŁAŚCIWOŚCI		SYMBOL FABRYCZNY	NASZ KOD	TYP	TYP BANDY	LICZBA ZĘBÓW	Dp	De	Df	Dm	Di	F	L	OTWÓR PILOTOWY	MASA
STAL	Z BANDA	18 XH 400	XH 400018	6F	F44	18	127,34	124,55	140	100	-	118	132	32	9,50
		19 XH 400	XH 400019	6F	F46	19	134,41	131,62	146	100	-	118	132	32	10,65
		20 XH 400	XH 400020	6F	F50	20	141,49	128,69	155	100	-	118	132	32	11,80
		21 XH 400	XH 400021	6F	F51	21	148,56	145,77	160	110	-	118	132	32	13,20
		22 XH 400	XH 400022	6F	F52	22	155,64	152,84	168	110	-	118	132	32	14,73
		24 XH 400	XH 400024	6F	F81	24	169,79	166,99	184	132	-	118	132	32	17,80
		25 XH 400	XH 400025	6F	F56	25	176,86	174,07	188	132	-	118	132	32	19,40
		26 XH 400	XH 400026	6F	F59	26	183,94	181,14	200	132	-	118	132	32	21,10
		27 XH 400	XH 400027	6F	F59	27	191,01	188,22	200	132	-	118	132	32	22,80
		28 XH 400	XH 400028	6F	F61	28	198,08	195,29	212	150	-	118	132	32	22,60
		30 XH 400	XH 400030	6F	F62	30	212,23	209,44	226	150	-	118	132	32	28,70
		32 XH 400	XH 400032	6WF	F64	32	226,38	223,59	240	150	-	118	132	32	32,50
		34 XH 400	XH 400034	6WF	F66	34	240,53	237,74	256	150	-	118	132	32	36,50
		38 XH 400	XH 400038	6WF	F69	38	268,83	266,03	286	150	227	118	132	32	40,00
40 XH 400	XH 400040	6WF	F70	40	282,98	280,18	296	150	241	118	132	32	32,90		
ŻELIWO	BEZ BANDY	46 XH 400	XH 400046	6W		46	325,42	322,63	-	175	283	118	132	32	38,00
		48 XH 400	XH 400048	6W		48	339,57	336,78	-	175	297	118	132	32	41,00
		50 XH 400	XH 400050	6W		50	410,32	407,52	-	175	368	118	132	32	46,00
		60 XH 400	XH 400060	6W		60	424,47	421,67	-	175	382	118	132	32	47,00
		70 XH 400	XH 400070	6A		70	495,21	492,42	-	175	453	118	132	32	66,00
		72 XH 400	XH 400072	6A		72	509,36	506,56	-	175	467	118	132	32	68,00
		78 XH 400	XH 400078	6A		78	551,81	549,01	-	175	510	118	132	32	71,00
		80 XH 400	XH 400080	6A		80	565,95	563,16	-	175	524	118	132	32	73,00
		82 XH 400	XH 400082	6A		82	580,10	577,31	-	175	538	118	132	32	74,50
		84 XH 400	XH 400084	6A		84	594,25	591,46	-	175	552	118	132	32	78,00
		94 XH 400	XH 400094	6A		94	665,00	662,20	-	175	623	118	132	32	86,00
		96 XH 400	XH 400096	6A		96	679,15	676,35	-	175	637	118	132	32	98,00
		116 XH 400	XH 400116	6A		118	834,78	831,99	-	175	792	118	132	32	142,00
		120 XH 400	XH 400120	6A		120	848,93	846,14	-	175	806	118	132	32	156,00

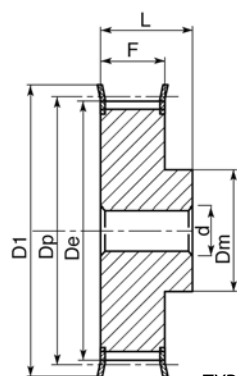


TYP 6F

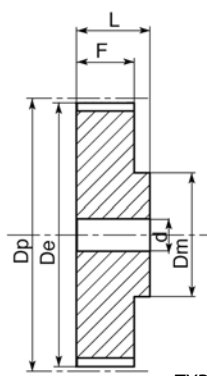

TYP 6

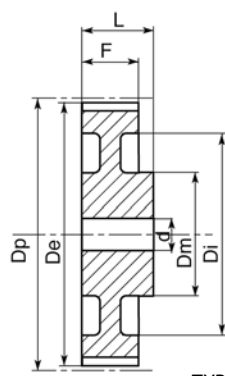

TYP 6W

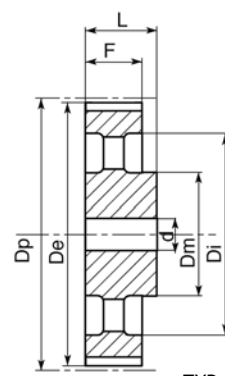


TYP 6A

XXH 200 - 1" 1/4 (31,750 mm)

WŁAŚCIWOŚCI		SYMBOL FABRYCZNY	NASZ KOD	TYP	TYP BANDY	LICZBA ZĘBÓW	Dp	De	Df	Dm	Di	F	L	OTWÓR PILOTOWY	MASA
STAL	WITH FLANGES	18 XXH 200	XXH 2018	6F	F58	18	181,91	178,87	198	140	-	64,2	100	28	14,2
		19 XXH 200	XXH 2019	6F	F60	19	192,02	188,97	205	140	-	64,2	100	28	15,8
		20 XXH 200	XXH 2020	6F	F61	20	202,13	199,08	212	150	-	64,2	100	28	17,3
		21 XXH 200	XXH 2021	6F	F62	21	212,23	209,19	226	150	-	64,2	100	28	18,5
		22 XXH 200	XXH 2022	6F	F64	22	222,34	219,29	240	150	-	64,2	100	28	20,0
ŻELIWO	BEZ BANDY	24 XXH 200	XXH 2024	6		24	242,55	239,50	-	150	-	64,2	100	28	23,6
		25 XXH 200	XXH 2025	6W		25	252,66	249,61	-	150	196	64,2	100	28	18,0
		26 XXH 200	XXH 2026	6W		26	262,76	259,79	-	150	207	64,2	100	28	20,0
		27 XXH 200	XXH 2027	6W		27	272,87	269,82	-	150	216	64,2	100	28	24,0
		30 XXH 200	XXH 2030	6W		30	303,19	300,14	-	150	247	64,2	100	28	26,0
		34 XXH 200	XXH 2034	6W		34	343,62	340,57	-	150	287	64,2	100	28	31,8
		40 XXH 200	XXH 2040	6W		40	404,25	401,21	-	150	348	64,2	100	28	43,0
		48 XXH 200	XXH 2048	6W		48	485,10	482,06	-	175	429	64,2	100	32	60,4
		60 XXH 200	XXH 2060	6A		60	606,38	603,33	-	175	547	64,2	120	32	100,0
		72 XXH 200	XXH 2072	6A		72	727,66	724,61	-	175	668	64,2	120	38	130,0
		90 XXH 200	XXH 2090	6A		90	909,57	906,52	-	175	850	64,2	120	38	156,0

XXH 300 - 1" 1/4 (31,750 mm)

WŁAŚCIWOŚCI		SYMBOL FABRYCZNY	NASZ KOD	TYP	TYP BANDY	LICZBA ZĘBÓW	Dp	De	Df	Dm	Di	F	L	OTWÓR PILOTOWY	MASA
STAL	WITH FLANGES	18 XXH 300	XXH 3018	6F	F58	18	181,91	178,87	198	140	-	91,4	110	28	16,0
		19 XXH 300	XXH 3019	6F	F60	19	192,02	188,97	205	140	-	91,4	110	28	18,4
		20 XXH 300	XXH 3020	6F	F61	20	202,13	199,08	212	150	-	91,4	110	28	20,4
		21 XXH 300	XXH 3021	6F	F62	21	212,23	209,19	226	150	-	91,4	110	28	22,0
		22 XXH 300	XXH 3022	6F	F64	22	222,34	219,29	240	150	-	91,4	110	28	25,0
ŻELIWO	BEZ BANDY	24 XXH 300	XXH 3024	6		24	242,55	239,50	-	150	-	91,4	110	28	29,2
		25 XXH 300	XXH 3025	6W		25	252,66	249,61	-	150	196	91,4	110	28	24,6
		26 XXH 300	XXH 3026	6W		26	262,76	259,79	-	150	207	91,4	110	28	27,0
		27 XXH 300	XXH 3027	6W		27	272,87	269,82	-	150	216	91,4	110	28	29,0
		30 XXH 300	XXH 3030	6W		30	303,19	300,14	-	150	247	91,4	110	28	31,0
		34 XXH 300	XXH 3034	6W		34	343,62	340,57	-	150	287	91,4	110	28	39,0
		40 XXH 300	XXH 3040	6W		40	404,25	401,21	-	150	348	91,4	110	28	45,0
		48 XXH 300	XXH 3048	6W		48	485,10	482,06	-	175	429	91,4	110	32	60,0
		60 XXH 300	XXH 3060	6A		60	606,38	603,33	-	175	547	91,4	120	32	100,0
		72 XXH 300	XXH 3072	6A		72	727,66	724,61	-	175	668	91,4	120	38	135,0
		90 XXH 300	XXH 3090	6A		90	909,57	906,52	-	175	850	91,4	120	38	160,0

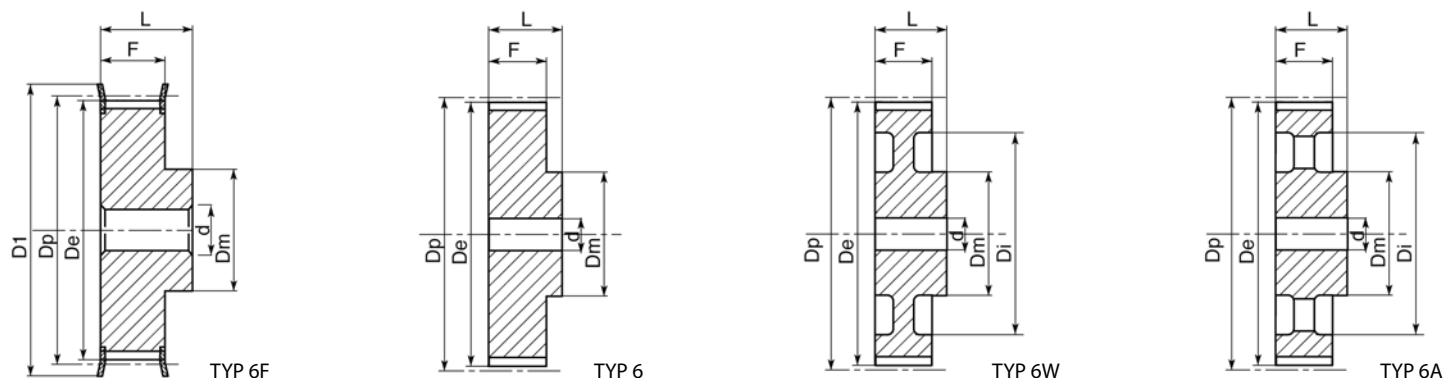

XXH 400 - 1" 1/4 (31,750 mm)


WŁAŚCIWOŚCI	SYMBOL FABRYCZNY	NASZ KOD	TYP	TYP BANDY	LICZBA ZĘBÓW	Dp	De	Df	Dm	Di	F	L	OTWÓR PILOTOWY	MASA
STAL	WITH FLANGES	18 XXH 400	XXH 4018	6F	F58	18	181,91	178,87	198	140	-	120,7	140	20,8
		19 XXH 400	XXH 4019	6F	F60	19	192,02	188,97	205	140	-	120,7	140	24,0
		20 XXH 400	XXH 4020	6F	F61	20	202,13	199,08	212	150	-	120,7	140	26,0
		21 XXH 400	XXH 4021	6F	F62	21	212,23	209,19	226	150	-	120,7	140	28,5
		22 XXH 400	XXH 4022	6F	F64	22	222,34	219,29	240	150	-	120,7	140	31,6
ŻELIWO	BEZ BANDY	24 XXH 400	XXH 4024	6		24	242,55	239,50	-	150	-	120,7	140	35,0
		25 XXH 400	XXH 4025	6W		25	252,66	249,61	-	150	196	120,7	140	28,0
		26 XXH 400	XXH 4026	6W		26	262,76	259,79	-	150	207	120,7	140	32,4
		27 XXH 400	XXH 4027	6W		27	272,87	269,82	-	150	216	120,7	140	34,0
		30 XXH 400	XXH 4030	6W		30	303,19	300,14	-	185	247	120,7	140	36,0
		34 XXH 400	XXH 4034	6W		34	343,62	340,57	-	185	287	120,7	140	47,6
		40 XXH 400	XXH 4040	6W		40	404,25	401,21	-	185	348	120,7	140	65,0
		48 XXH 400	XXH 4048	6W		48	485,10	482,06	-	185	429	120,7	140	80,5
		60 XXH 400	XXH 4060	6A		60	606,38	603,33	-	185	547	120,7	140	108,0
		72 XXH 400	XXH 4072	6A		72	727,66	724,61	-	220	668	120,7	140	140,0
		90 XXH 400	XXH 4090	6A		90	909,57	906,52	-	220	850	120,7	140	170,0

XXH 500 - 1" 1/4 (31,750 mm)

WŁAŚCIWOŚCI	SYMBOL FABRYCZNY	NASZ KOD	TYP	TYP BANDY	LICZBA ZĘBÓW	Dp	De	Df	Dm	Di	F	L	OTWÓR PILOTOWY	MASA
STAL	WITH FLANGES	18 XXH 500	XXH 5018	6F	F58	18	181,91	178,87	198	140	-	145,3	168	24,0
		19 XXH 500	XXH 5019	6F	F60	19	192,02	188,97	205	140	-	145,3	168	28,0
		20 XXH 500	XXH 5020	6F	F61	20	202,13	199,08	212	150	-	145,3	168	31,4
		21 XXH 500	XXH 5021	6F	F62	21	212,23	209,19	226	150	-	145,3	168	34,0
		22 XXH 500	XXH 5022	6F	F64	22	222,34	219,29	240	150	-	145,3	168	38,3
ŻELIWO	BEZ BANDY	24 XXH 500	XXH 5024	6		24	242,55	239,50	-	150	-	145,3	168	45,0
		25 XXH 500	XXH 5025	6W		25	252,66	249,61	-	150	196	145,3	168	36,0
		26 XXH 500	XXH 5026	6W		26	262,76	259,79	-	150	207	145,3	168	37,5
		27 XXH 500	XXH 5027	6W		27	272,87	269,82	-	150	216	145,3	168	42,0
		30 XXH 500	XXH 5030	6W		30	303,19	300,14	-	215	247	145,3	168	46,8
		34 XXH 500	XXH 5034	6W		34	343,62	340,57	-	215	287	145,3	168	57,0
		40 XXH 500	XXH 5040	6W		40	404,25	401,21	-	215	348	145,3	168	68,0
		48 XXH 500	XXH 5048	6W		48	485,10	482,06	-	215	429	145,3	168	88,8
		60 XXH 500	XXH 5060	6A		60	606,38	603,33	-	240	547	145,3	168	99,81
		72 XXH 500	XXH 5072	6A		72	727,66	724,61	-	240	668	145,3	168	172,0
		90 XXH 500	XXH 5090	6A		90	909,57	906,52	-	240	850	145,3	168	242,5

Koła pasowe do pasków zębatych pod tuleję zaciskową



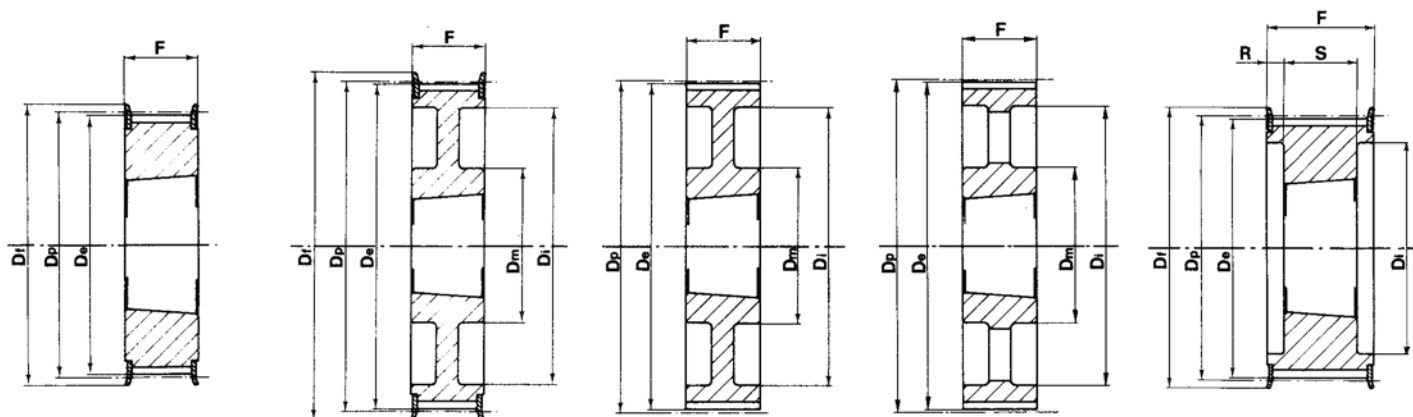


TYP 3F

TYP 3WF

TYP 3W

TYP 3A

TYP 4F

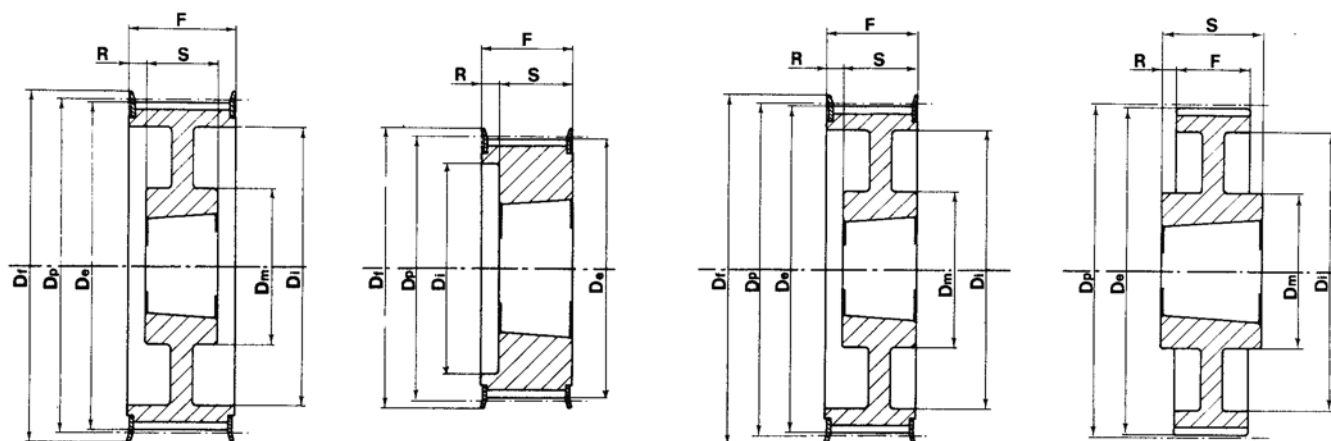


TYP 4WF

TYP 5F

TYP 5WF

TYP 7W

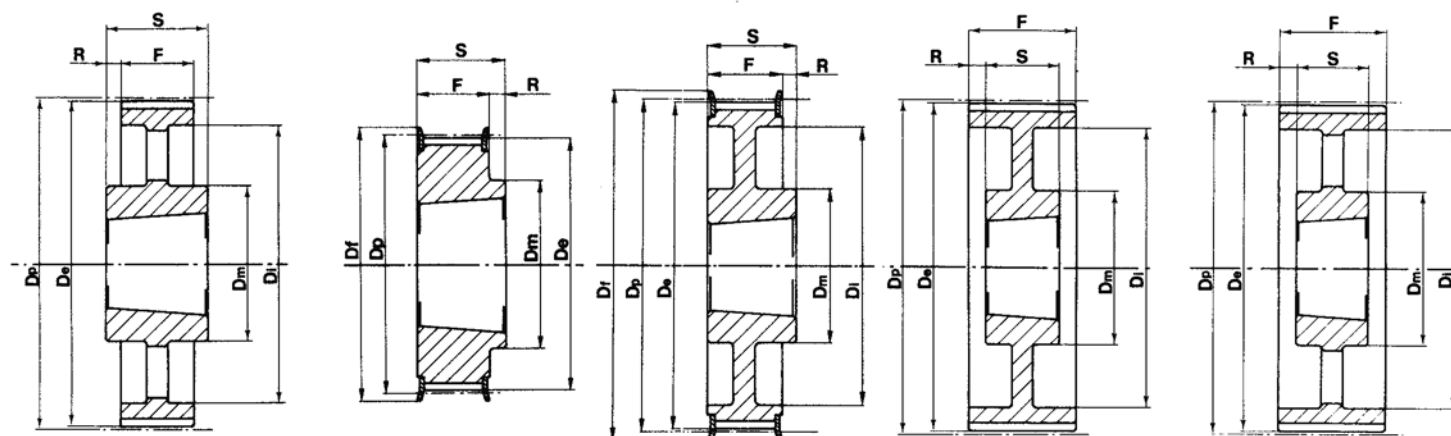

TYP 7A

TYP 8F

TYP 8WF

TYP 9W

TYP 9A

L 050 - 3/8" (9,525 mm)

WŁAŚCIWOŚCI		SYMBOL FABRYCZNY	NASZ KOD	TYP	TYP BANDY	TULEJA	MAX. OTWÓR	Dp	De	Df	Dm	Di	F	S	R	MASA
STAL	WITH FLANGES	18 L 050	TL50018	8F	F22	1108	28	54,57	53,81	60	45	-	19,0	22,0	3	0,2
		19 L 050	TL50019	8F	F24	1108	28	57,61	56,84	64	45	-	19,0	22,0	3	0,2
		20 L 050	TL50020	8F	F25	1108	28	60,64	59,88	66	48	-	19,0	22,0	3	0,2
		21 L 050	TL50021	8F	F26	1108	28	63,67	62,91	70	48	-	19,0	22,0	3	0,3
		22 L 050	TL50022	8F	F27	1108	28	66,70	65,94	75	51	-	19,0	22,0	3	0,3
		23 L 050	TL50023	8F	F28	1108	28	69,73	68,97	79	54	-	19,0	22,0	3	0,4
		24 L 050	TL50024	8F	F28	1108	28	72,77	72,00	79	54	-	19,0	22,0	3	0,4
		25 L 050	TL50025	8F	F29	1108	28	75,80	75,04	83	56	-	19,0	22,0	3	0,5
		26 L 050	TL50026	8F	F30	1108	28	78,83	78,07	87	60	-	19,0	22,0	3	0,5
		27 L 050	TL50027	8F	F30	1108	28	81,86	81,10	87	62	-	19,0	22,0	3	0,6
		28 L 050	TL50028	8F	F31	1108	28	84,89	84,13	91	65	-	19,0	22,0	3	0,6
		30 L 050	TL50030	8F	F33	1108	28	90,96	90,20	97	70	-	19,0	22,0	3	0,8
		32 L 050	TL50032	8F	F34	1108	28	97,02	96,26	102	74	-	19,0	22,0	3	0,9
		36 L 050	TL50036	8F	F37	1108	28	109,15	108,39	115	85	-	19,0	22,0	3	1,2
		40 L 050	TL50040	8F	F40	1610	42	121,28	120,51	128	88	-	19,0	25,0	3	1,5
		44 L 050	TL50044	8WF	F45	1610	42	133,40	132,64	142	88	110	19,0	25,0	3	1,8
		48 L 050	TL50048	8WF	F48	1610	42	145,53	144,77	150	88	120	19,0	25,0	3	2,3
		ŻELIWO	BEZ BANDY	60 L 050	TL50060	7W		1610	42	181,91	181,15	-	92	166	19,0	25,0
72 L 050	TL50072			7A		1610	42	218,30	217,53	-	92	202	19,0	25,0	6	3,0
84 L 050	TL50084			7A		1610	42	254,68	259,90	-	92	236	19,0	25,0	6	4,0
96 L 050	TL50096			7A		2012	50	291,08	290,30	-	106	270	19,0	32,0	13	5,5
120 L 050	TL50120			7A		2012	50	363,83	363,07	-	106	343	19,0	32,0	13	6,8

L 075 - 3/8" (9,525 mm)

WŁAŚCIWOŚCI		SYMBOL FABRYCZNY	NASZ KOD	TYP	TYP BANDY	TULEJA	MAX. OTWÓR	Dp	De	Df	Dm	Di	F	S	R	MASA
STAL	WITH FLANGES	18 L 075	TL75018	3F	F22	1108	28	54,57	53,81	60	-	-	25,0	25,0	-	0,2
		19 L 075	TL75019	3F	F24	1108	28	57,61	56,84	64	-	-	25,0	25,0	-	0,2
		20 L 075	TL75020	3F	F25	1108	28	60,64	59,88	66	-	-	25,0	25,0	-	0,2
		21 L 075	TL75021	3F	F26	1108	28	63,67	62,91	70	-	-	25,0	25,0	-	0,4
		22 L 075	TL75022	3F	F27	1108	28	66,70	65,94	75	-	-	25,0	25,0	-	0,4
		23 L 075	TL75023	3F	F28	1108	28	69,73	68,97	79	-	-	25,0	25,0	-	0,4
		24 L 075	TL75024	3F	F28	1108	28	72,77	72,00	79	-	-	25,0	25,0	-	0,5
		25 L 075	TL75025	3F	F29	1108	28	75,80	75,04	83	-	-	25,0	25,0	-	0,6
		26 L 075	TL75026	3F	F30	1108	28	78,83	78,07	87	-	-	25,0	25,0	-	0,6
		27 L 075	TL75027	3F	F30	1108	28	81,86	81,10	87	-	-	25,0	25,0	-	0,7
		28 L 075	TL75028	3F	F31	1108	28	84,89	84,13	91	-	-	25,0	25,0	-	0,7
		30 L 075	TL75030	3F	F33	1108	28	90,96	90,20	97	-	-	25,0	25,0	-	0,9
		32 L 075	TL75032	3F	F34	1108	28	97,02	96,26	102	-	-	25,0	25,0	-	1,0
		36 L 075	TL75036	3F	F37	1610	42	109,15	108,39	115	-	-	25,0	25,0	-	1,2
		40 L 075	TL75040	3F	F40	1610	42	121,28	120,51	128	-	-	25,0	25,0	-	1,7
		44 L 075	TL75044	3WF	F45	1610	42	133,40	132,64	142	90	110	25,0	25,0	-	2,1
		48 L 075	TL75048	3WF	F48	1610	42	145,53	144,77	150	92	120	25,0	25,0	-	2,5
ŻELIWO	BEZ BANDY	60 L 075	TL75060	3W		1610	42	181,91	181,15	-	92	166	25,0	25,0	-	3,0
		72 L 075	TL75072	3A		1610	42	218,30	217,53	-	92	202	25,0	25,0	-	4,0
		84 L 075	TL75084	7A		2012	50	254,68	259,90	-	92	236	25,0	32,0	-	5,2
		96 L 075	TL75096	7A		2012	50	291,08	290,30	-	106	270	25,0	32,0	3,5	6,5
		120 L 075	TL75120	7A		2012	50	363,83	363,07	-	106	343	25,0	32,0	3,5	7,6

L 100 - 3/8" (9,525 mm)

WŁAŚCIWOŚCI		SYMBOL FABRYCZNY	NASZ KOD	TYP	TYP BANDY	TULEJA	MAX. OTWÓR	Dp	De	Df	Dm	Di	F	S	R	MASA
STAL	WITH FLANGES	18 L 100	TL10018	5F	F22	1108	28	54,57	53,81	60	-	38	31,00	22,0	9,0	0,2
		19 L 100	TL10019	5F	F24	1108	28	57,61	56,84	64	-	38	31,00	22,0	9,0	0,3
		20 L 100	TL10020	5F	F25	1108	28	60,64	59,88	66	-	45	31,00	22,0	9,0	0,4
		21 L 100	TL10021	5F	F26	1108	28	63,67	62,91	70	-	45	31,00	22,0	9,0	0,4
		22 L 100	TL10022	5F	F27	1108	28	66,70	65,94	75	-	48	31,00	22,0	9,0	0,4
		23 L 100	TL10023	5F	F28	1108	28	69,73	68,97	79	-	52	31,00	22,0	10,0	0,5
		24 L 100	TL10024	5F	F28	1108	28	72,77	72,00	79	-	52	31,00	22,0	10,0	0,6
		25 L 100	TL10025	5F	F29	1108	28	75,80	75,04	83	-	54	31,00	22,0	10,0	0,6
		26 L 100	TL10026	5F	F30	1108	28	78,83	78,07	87	-	60	31,00	22,0	10,0	0,7
		27 L 100	TL10027	5F	F30	1108	28	81,86	81,10	87	-	60	31,00	22,0	10,0	0,8
		28 L 100	TL10028	5F	F31	1108	28	84,89	84,13	91	-	65	31,00	22,0	10,0	0,8
		30 L 100	TL10030	5F	F33	1210	32	90,96	90,20	97	-	71	31,00	25,0	7,0	0,9
		32 L 100	TL10032	5F	F34	1210	32	97,02	96,26	102	-	75	31,00	25,0	7,0	1,0
		36 L 100	TL10036	5F	F37	1610	42	109,15	108,39	115	-	86	31,00	25,0	7,0	1,4
		40 L 100	TL10040	5F	F40	1610	42	121,28	120,51	128	-	96	31,00	25,0	7,0	1,7
		44 L 100	TL10044	5WF	F45	1610	42	133,40	132,64	142	90	110	31,00	25,0	-	2,3
		48 L 100	TL10048	5WF	F48	1610	42	145,53	144,77	150	92	120	31,00	25,0	7,0	2,7
ŻELIWO	BEZ BANDY	60 L 100	TL10060	9W		1610	42	181,91	181,15	-	92	166	31,00	25,0	3,5	2,4
		72 L 100	TL10072	3A		2012	50	218,30	217,53	-	92	202	31,00	32,0	-	4,4
		84 L 100	TL10084	3A		2012	50	254,68	259,90	-	92	236	31,00	32,0	-	6,0
		96 L 100	TL10096	3A		2012	50	291,08	290,30	-	106	270	31,00	32,0	-	7,1
		120 L 100	TL10120	3A		2012	50	363,83	363,07	-	106	343	31,00	32,0	-	8,5

H 100 - 1/2" (12,7 mm)

WŁAŚCIWOŚCI		SYMBOL FABRYCZNY	NASZ KOD	TYP	TYP BANDY	TULEJA	MAX. OTWÓR	Dp	De	Df	Dm	Di	F	S	R	MASA
STAL	WITH FLANGES	16 H 100	TH 10016	5F	F26	1108	28	64,68	63,31	70	-	45	31,0	22,0	9,0	0,4
		18 H 100	TH 10018	5F	F28	1210	32	72,77	71,39	79	-	52	31,0	25,0	6,0	0,5
		19 H 100	TH 10019	5F	F29	1210	32	76,81	75,44	83	-	56	31,0	25,0	6,0	0,6
		20 H 100	TH 10020	5F	F30	1210	32	80,55	79,48	87	-	60	31,0	25,0	6,0	0,7
		21 H 100	TH 10021	5F	F31	1210	32	84,89	83,52	91	-	64	32,0	25,0	7,0	0,8
		22 H 100	TH 10022	5F	F32	1210	32	88,94	87,56	93	-	67	32,0	25,0	7,0	0,9
		23 H 100	TH 10023	5F	F33	1610	42	92,98	91,61	97	-	70	32,0	25,0	7,0	0,9
		24 H 100	TH 10024	5F	F34	1610	42	97,02	95,65	102	-	74	32,0	25,0	7,0	1,0
		25 H 100	TH 10025	5F	F35	1610	42	101,06	99,69	106	-	77	32,0	25,0	7,0	1,0
		26 H 100	TH 10026	5F	F36	1610	42	105,11	103,73	112	-	82	32,0	25,0	7,0	1,2
		27 H 100	TH 10027	5F	F37	1610	42	109,15	107,78	115	-	85	32,0	25,0	7,0	1,3
		28 H 100	TH 10028	5F	F38	1610	42	113,19	111,82	120	-	90	32,0	25,0	7,0	1,5
		30 H 100	TH 10030	5F	F40	1610	42	121,28	119,90	128	-	98	32,0	25,0	7,0	1,7
		32 H 100	TH 10032	5WF	F42	1610	42	129,38	127,99	135	80	106	32,0	25,0	7,0	2,0
		36 H 100	TH 10036	5WF	F48	1610	42	145,53	144,16	150	92	121	32,0	25,0	7,0	2,7
		40 H 100	TH 10040	5WF	F52	1610	42	161,70	160,33	168	92	138	32,0	25,0	7,0	3,6
		44 H 100	TH 10044	5WF	F55	2012	50	177,87	176,50	184	106	152	32,0	25,0	-	3,8
		48 H 100	TH 10048	5WF	F59	2012	50	194,04	192,67	200	106	169	32,0	25,0	-	3,2
ŻELIWO	BEZ BANDY	60 H 100	TH 10060	9A		2012	50	242,55	241,18	-	92	223	34,0	32,0	1,0	4,8
		72 H 100	TH 10072	9A		2012	50	291,06	289,69	-	92	270	34,0	32,0	1,0	5,7
		84 H 100	TH 10084	9A		2012	50	339,57	338,20	-	92	318	34,0	32,0	1,0	6,8
		96 H 100	TH 10096	7A		2517	60	388,08	386,71	-	106	366	34,0	45,0	5,5	8,2
		120 H 100	TH 10120	7A		2517	60	485,10	483,73	-	106	462	34,0	45,0	5,5	12,1

H 150 - 1/2" (12,7 mm)

WŁAŚCIWOŚCI		SYMBOL FABRYCZNY	NASZ KOD	TYP	TYP BANDY	TULEJA	MAX. OTWÓR	Dp	De	Df	Dm	Di	F	S	R	MASA
STAL	WITH FLANGES	18 H 150	TH 15018	5F	F28	1210	32	72,77	71,39	79	-	52	45,0	25,0	20,0	0,6
		19 H 150	TH 15019	5F	F29	1210	32	76,81	75,44	83	-	56	45,0	25,0	20,0	0,7
		20 H 150	TH 15020	5F	F30	1210	32	80,55	79,48	87	-	60	45,0	25,0	20,0	0,8
		21 H 150	TH 15021	5F	F31	1210	32	84,89	83,52	91	-	64	45,0	25,0	20,0	1,0
		22 H 150	TH 15022	5F	F32	1210	32	88,94	87,56	93	-	67	45,0	25,0	20,0	1,2
		23 H 150	TH 15023	5F	F33	1610	42	92,98	91,61	97	-	70	45,0	25,0	20,0	1,3
		24 H 150	TH 15024	5F	F34	1610	42	97,02	95,65	102	-	74	45,0	25,0	20,0	1,0
		25 H 150	TH 15025	5F	F35	1610	42	101,06	99,69	106	-	77	45,0	25,0	20,0	1,2
		26 H 150	TH 15026	5F	F36	1610	42	105,11	103,73	112	-	82	45,0	25,0	20,0	1,4
		27 H 150	TH 15027	5F	F37	1610	42	109,15	107,78	115	-	85	45,0	25,0	20,0	1,6
		28 H 150	TH 15028	5F	F38	1610	42	113,19	111,82	120	-	90	45,0	25,0	20,0	1,8
		30 H 150	TH 15030	5F	F40	1610	42	121,28	119,90	128	-	98	45,0	25,0	20,0	2,3
		32 H 150	TH 15032	5WF	F42	1610	42	129,38	127,99	135	80	106	45,0	25,0	20,0	2,3
		36 H 150	TH 15036	5WF	F48	1610	42	145,53	144,16	150	92	121	45,0	25,0	20,0	3,1
		40 H 150	TH 15040	5WF	F52	1610	42	161,70	160,33	168	92	138	45,0	25,0	20,0	4,0
		44 H 150	TH 15044	5WF	F55	2012	50	177,87	176,50	184	106	152	45,0	32,0	13,0	4,4
		48 H 150	TH 15048	5WF	F59	2012	50	194,04	192,67	200	106	169	45,0	32,0	13,0	4,8
ŻELIWO	BEZ BANDY	60 H 150	TH 15060	9A		2012	50	242,55	241,18	-	92	223	46,0	32,0	7,5	5,4
		72 H 150	TH 15072	9A		2012	50	291,06	289,69	-	92	270	46,0	32,0	7,5	6,5
		84 H 150	TH 15084	9A		2012	50	339,57	338,20	-	92	318	46,0	32,0	7,5	8,4
		96 H 150	TH 15096	9A		2517	60	388,08	386,71	-	106	366	46,0	45,0	0,5	11,0
		120 H 150	3E 73120	9A		2517	60	485,10	483,73	-	106	462	46,0	45,0	0,5	14,8

H 200 - 1/2" (12,7 mm)

WŁAŚCIWOŚCI		SYMBOL FABRYCZNY	NASZ KOD	TYP	TYP BANDY	TULEJA	MAX. OTWÓR	Dp	De	Df	Dm	Di	F	S	R	MASA
STAL	WITH FLANGES	18 H 200	TH 20018	5F	F28	1210	32	72,77	71,39	79	-	52	58,0	25,0	33,0	0,8
		19 H 200	TH 20019	5F	F29	1210	32	76,81	75,44	83	-	56	58,0	25,0	33,0	0,9
		20 H 200	TH 20020	5F	F30	1610	42	80,55	79,48	87	-	60	58,0	25,0	33,0	1,0
		21 H 200	TH 20021	5F	F31	1610	42	84,89	83,52	91	-	64	58,0	25,0	33,0	1,7
		22 H 200	TH 20022	5F	F32	1610	42	88,94	87,56	93	-	67	58,0	25,0	33,0	1,5
		23 H 200	TH 20023	5F	F33	1610	42	92,98	91,61	97	-	70	58,0	25,0	33,0	1,8
		24 H 200	TH 20024	5F	F34	1610	42	97,02	95,65	102	-	74	58,0	25,0	33,0	1,5
		25 H 200	TH 20025	5F	F35	1610	42	101,06	99,69	106	-	77	58,0	25,0	33,0	1,5
		26 H 200	TH 20026	5F	F36	1610	42	105,11	103,73	112	-	82	58,0	25,0	33,0	1,8
		27 H 200	TH 20027	5F	F37	1610	42	109,15	107,78	115	-	85	58,0	25,0	33,0	1,9
		28 H 200	TH 20028	5F	F38	1610	42	113,19	111,82	120	-	90	58,0	25,0	33,0	1,9
		30 H 200	TH 20030	5F	F40	1610	42	121,28	119,90	128	-	98	58,0	25,0	33,0	2,3
		32 H 200	TH 20032	5F	F42	2012	50	129,38	127,99	135	-	106	58,0	32,0	26,0	3,0
		36 H 200	TH 20036	5WF	F48	2012	50	145,53	144,16	150	102	121	58,0	32,0	26,0	3,0
		40 H 200	TH 20040	5WF	F52	2012	50	161,70	160,33	168	106	138	58,0	32,0	26,0	3,6
		44 H 200	TH 20044	5WF	F55	2012	50	177,87	176,50	184	106	152	58,0	32,0	26,0	4,0
		48 H 200	TH 20048	5WF	F59	2517	60	194,04	192,67	200	119	169	58,0	45,0	13,0	4,6
ŻELIWO	BEZ BANDY	60 H 200	TH 20060	9A		2517	60	242,55	241,18	-	119	223	60,0	45,0	7,5	7,0
		72 H 200	TH 20072	9A		2517	60	291,06	289,69	-	119	270	60,0	45,0	7,5	8,0
		84 H 200	TH 20084	9A		2517	60	339,57	338,20	-	119	318	60,0	45,0	7,5	9,0
		96 H 200	TH 20096	9A		2517	60	388,08	386,71	-	119	366	60,0	45,0	7,5	10,0
		120 H 200	TH 20120	9A		2517	60	485,10	483,73	-	119	462	60,0	45,0	7,5	13,4

H 300 - 1/2" (12,7 mm)

WŁAŚCIWOŚCI		SYMBOL FABRYCZNY	NASZ KOD	TYP	TYP BANDY	TULEJA	MAX. OTWÓR	Dp	De	Df	Dm	Di	F	S	R	MASA
STAL	WITH FLANGES	20 H 300	TH 30020	4F	F31	1615	42	80,55	79,48	87	-	65	84,0	38,0	23,0	1,5
		21 H 300	TH 30021	4F	F31	1615	42	84,89	83,52	91	-	65	84,0	38,0	23,0	1,2
		22 H 300	TH 30022	4F	F32	1615	42	88,94	87,56	93	-	67	84,0	38,0	23,0	1,6
		23 H 300	TH 30023	4F	F33	1615	42	92,98	91,61	97	-	70	84,0	38,0	23,0	1,8
		24 H 300	TH 30024	4F	F34	1615	42	97,02	95,65	102	-	74	84,0	38,0	23,0	2,0
		25 H 300	TH 30025	4F	F35	1615	42	101,06	99,69	106	-	77	84,0	38,0	23,0	2,0
		26 H 300	TH 30026	4F	F36	1615	42	105,11	103,73	112	-	82	84,0	38,0	23,0	2,7
		27 H 300	TH 30027	4F	F37	2012	50	109,15	107,78	115	-	85	84,0	32,0	26,0	3,0
		28 H 300	TH 30028	4F	F38	2012	50	113,19	111,82	120	-	90	84,0	32,0	26,0	2,4
		30 H 300	TH 30030	4F	F40	2012	50	121,28	119,90	128	-	98	84,0	32,0	26,0	2,9
		32 H 300	TH 30032	4F	F42	2517	60	129,38	127,99	135	-	106	84,0	45,0	19,5	3,3
		36 H 300	TH 30036	4F	F48	2517	60	145,53	144,16	150	-	121	84,0	45,0	19,5	4,5
		40 H 300	TH 30040	4F	F52	2517	60	161,70	160,33	168	-	138	84,0	45,0	19,5	6,0
		44 H 300	TH 30044	4WF	F55	2517	60	177,87	176,50	184	119	152	86,0	45,0	20,5	6,6
		48 H 300	TH 30048	4WF	F59	2517	60	194,04	192,67	200	119	168	86,0	45,0	20,5	7,6
ŻELIWO	BEZ BANDY	60 H 300	TH 30060	9A		2517	60	242,55	241,18	-	119	223	86,0	45,0	20,5	8,4
		72 H 300	TH 30072	9A		2517	60	291,06	289,69	-	119	270	86,0	45,0	20,5	10,4
		84 H 300	TH 30084	9A		2517	60	339,57	338,20	-	119	318	86,0	45,0	20,5	12,5
		96 H 300	TH 30096	9A		3030	75	388,08	386,71	-	150	366	86,0	76,0	5,0	14,2
		120 H 300	TH 30120	9A		3030	75	485,10	483,73	-	150	462	86,0	76,0	5,0	18,8

XH 200 - 7/8" (22,225 mm)

WŁAŚCIWOŚCI		SYMBOL FABRYCZNY	NASZ KOD	TYP	TYP BANDY	TULEJA	MAX. OTWÓR	Dp	De	Df	Dm	Di	F	S	R	MASA
ŻELIWO	WITH FLANGES	18 XH 200	TXH 2018	5F	F44	2517	60	127,34	124,55	140	-	95	64	45	19	
		20 XH 200	TXH 2020	5F	F49	2517	60	141,49	138,69	154	-	110	64	45	19	
		22 XH 200	TXH 2022	5F	F52	2517	60	155,64	152,84	168	-	120	64	45	19	
		24 XH 200	TXH 2024	5F	F55	2517	60	169,79	166,99	184	-	135	64	45	19	
		26 XH 200	TXH 2026	5F	F59	2517	60	183,94	181,14	200	-	150	64	45	19	
		28 XH 200	TXH 2028	4WF	F61	2517	60	198,08	195,29	212	120	165	64	45	9,5	
		30 XH 200	TXH 2030	4WF	F62	2517	60	212,23	209,44	226	120	180	64	45	9,5	
		32 XH 200	TXH 2032	4WF	F64	2517	60	226,38	223,59	240	120	195	64	45	9,5	
		40 XH 200	TXH 2040	4WF	F70	3020	75	282,98	280,18	296	120	245	64	51	9,5	
	WITHOUT FLANGES	48 XH 200	TXH 2048	9W		3020	75	339,57	336,78	-	160	300	64	51	6,5	
		60 XH 200	TXH 2060	7A		3535	90	424,47	421,67	-	190	385	64	89	12,5	
		72 XH 200	TXH 2072	7A		3535	90	509,40	506,56	-	190	470	64	89	12,5	
		84 XH 200	TXH 2084	7A		3535	90	594,25	591,46	-	190	555	64	89	12,5	
		96 XH 200	TXH 2096	7A		3535	90	679,15	676,35	-	190	640	64	89	12,5	
		120 XH 200	TXH 2120	7A		3535	90	848,93	846,14	-	190	810	64	89	12,5	


XH 300 - 7/8" (22,225 mm)

WŁAŚCIWOŚCI		SYMBOL FABRYCZNY	NASZ KOD	TYP	TYP BANDY	TULEJA	MAX. OTWÓR	Dp	De	Df	Dm	Di	F	S	R	MASA
ŻELIWO	WITH FLANGES	18 XH 300	TXH 3018	5F	F44	2517	60	127,34	124,55	140	-	95	90	45	145	
		20 XH 300	TXH 3020	5F	F49	2517	60	141,49	138,69	154	-	110	90	45	45	
		22 XH 300	TXH 3022	5F	F52	2517	60	155,64	152,84	168	-	120	90	45	45	
		24 XH 300	TXH 3024	5F	F55	2517	60	169,79	166,99	184	-	135	90	45	45	
		26 XH 300	TXH 3026	5F	F59	2517	60	183,94	181,14	200	-	150	90	45	45	
		28 XH 300	TXH 3028	5F	F61	3020	75	198,08	195,29	212	120	165	90	51	39	
		30 XH 300	TXH 3030	5F	F62	3020	75	212,23	209,44	226	120	180	90	51	39	
		32 XH 300	TXH 3032	5F	F64	3020	75	226,38	223,59	240	120	195	90	51	39	
		40 XH 300	TXH 3040	4WF	F70	3020	75	282,98	280,18	296	160	245	90	51	19,5	
	WITHOUT FLANGES	48 XH 300	TXH 3048	9A		3020	75	339,57	336,78	-	160	300	90	51	19,5	
		60 XH 300	TXH 3060	9A		3535	90	424,47	421,67	-	190	385	90	89	0,5	
		72 XH 300	TXH 3072	9A		3535	90	509,40	506,56	-	190	470	90	89	0,5	
		84 XH 300	TXH 3084	7A		4040	100	594,25	591,46	-	190	555	90	102	6	
		96 XH 300	TXH 3096	7A		4040	100	679,15	676,35	-	190	640	90	102	6	
		120 XH 300	TXH 3120	7A		4040	100	848,93	846,14	-	190	810	90	102	6	


XH 400 - 7/8" (22,225 mm)

WŁAŚCIWOŚCI		SYMBOL FABRYCZNY	NASZ KOD	TYP	TYP BANDY	TULEJA	MAX. OTWÓR	Dp	De	Df	Dm	Di	F	S	R	MASA
ŻELIWO	WITH FLANGES	18 XH 400	TXH 4018	5F	F44	2517	60	127,34	124,55	140	-	95	119	45	74	
		20 XH 400	TXH 4020	5F	F49	2517	60	141,49	138,69	154	-	110	119	45	74	
		22 XH 400	TXH 4022	5F	F52	2517	60	155,64	152,84	168	-	120	119	45	74	
		24 XH 400	TXH 4024	5F	F55	3020	75	169,79	166,99	184	-	135	119	51	68	
		26 XH 400	TXH 4026	5F	F59	3020	75	183,94	181,14	200	-	150	119	51	68	
		28 XH 400	TXH 4028	5F	F61	3020	75	198,08	195,29	212	120	165	119	51	68	
		30 XH 400	TXH 4030	5F	F62	3020	75	212,23	209,44	226	120	180	119	51	68	
		32 XH 400	TXH 4032	5F	F64	3020	75	226,38	223,59	240	120	195	119	51	68	
		40 XH 400	TXH 4040	4WF	F70	3535	90	282,98	280,18	296	160	245	119	89	15	
	WITHOUT FLANGES	48 XH 400	TXH 4048	9W		3535	90	339,57	336,78	-	160	300	119	89	15	
		60 XH 400	TXH 4060	9A		4040	100	424,47	421,67	-	190	385	119	102	8,5	
		72 XH 400	TXH 4072	9A		4040	100	509,40	506,56	-	190	470	119	102	8,5	
		84 XH 400	TXH 4084	7A		4040	100	594,25	591,46	-	190	555	119	102	8,5	
		96 XH 400	TXH 4096	7A		4040	100	679,15	676,35	-	190	640	119	102	8,5	
		120 XH 400	TXH 4120	7A		4040	100	848,93	846,14	-	190	810	119	102	8,5	

Koła pasowe do pasków zębatych metrycznych

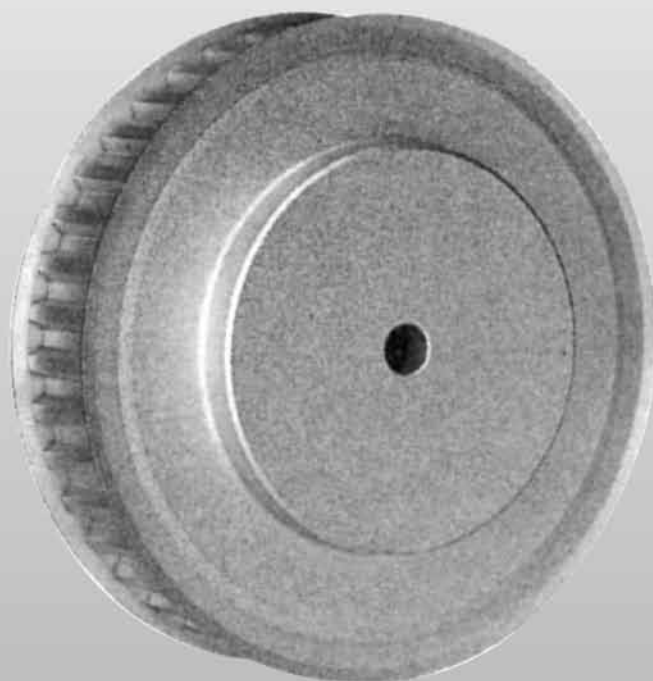

Materiał: aluminium 6082 T6 UNI 9006/4 odpowiedni do anodyzowania

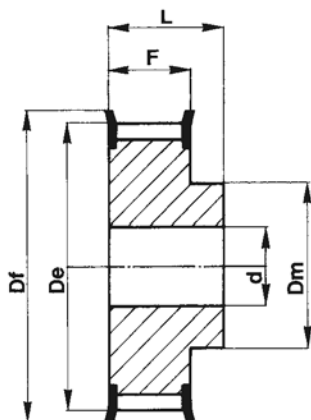

TYP 6F


T 10

podziałka 10 mm do paska o szerokości 16 mm

SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	ILOŚĆ ZĘBÓW	Dp	De	Df	Dm	F	L	d	MASA Kg
31T10/12-2	31T1012	6F	F15	12	38,35	36,35	42	28	21	31	6	0,076
31T10/14-2	31T1014	6F	F18	14	44,70	42,70	48	32	21	31	8	0,104
31T10/15-2	31T1015	6F	F19	15	47,90	45,90	51	32	21	31	8	0,116
31T10/16-2	31T1016	6F	F20	16	51,10	49,10	54	35	21	31	8	0,134
31T10/18-2	31T1018	6F	F22	18	57,45	55,45	60	40	21	31	8	0,167
31T10/19-2	31T1019	6F	F25	19	60,65	58,65	66	44	21	31	8	0,184
31T10/20-2	31T1020	6F	F25	20	63,80	61,80	66	46	21	31	8	0,208
31T10/22-2	31T1022	6F	F27	22	70,20	68,20	75	52	21	31	8	0,240
31T10/24-2	31T1024	6F	F29	24	76,55	74,55	83	58	21	31	8	0,288
31T10/25-2	31T1025	6F	F29	25	79,75	77,70	83	60	21	31	8	0,295
31T10/26-2	31T1026	6F	F30	26	82,90	80,90	87	60	21	31	8	0,310
31T10/27-2	31T1027	6F	F31	27	86,10	84,10	91	60	21	31	8	0,364
31T10/28-2	31T1028	6F	F32	28	89,25	87,25	93	60	21	31	8	0,441
31T10/30-2	31T1030	6F	F33	30	95,65	93,65	97	60	21	31	8	0,493
31T10/32-2	31T1032	6F	F35	32	102,00	100,00	106	65	21	31	10	0,623
31T10/36-2	31T1036	6F	F38	36	114,75	112,75	120	70	21	31	10	0,767
31T10/40-2	31T1040	6F	F41	40	127,45	125,45	131	80	21	31	10	0,950
31T10/44-0	31T1044	6	—	44	140,20	138,20	—	88	21	31	10	1,090
31T10/48-0	31T1048	6	—	48	152,95	150,95	—	95	21	31	16	1,704
31T10/60-0	31T1060	6	—	60	191,15	189,10	—	110	21	31	16	1,704

T 10


podziałka 10 mm do paska o szerokości 25 mm

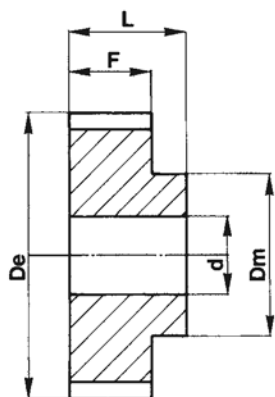

TYP 6

SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	ILOŚĆ ZĘBÓW	Dp	De	Df	Dm	F	L	d	MASA Kg
40T10/12-2	40T1012	6F	F15	12	38,35	36,35	42	28	30	40	6	0,099
40T10/14-2	40T1014	6F	F18	14	44,70	42,70	48	32	30	40	8	0,134
40T10/15-2	40T1015	6F	F19	15	47,90	45,90	51	32	30	40	8	0,152
40T10/16-2	40T1016	6F	F20	16	51,10	49,10	54	35	30	40	8	0,176
40T10/18-2	40T1018	6F	F22	18	57,45	55,45	60	40	30	40	8	0,224
40T10/19-2	40T1019	6F	F25	19	60,65	58,65	66	44	30	40	8	0,247
40T10/20-2	40T1020	6F	F25	20	63,80	61,80	66	46	30	40	8	0,276
40T10/22-2	40T1022	6F	F27	22	70,20	68,20	75	52	30	40	8	0,310
40T10/24-2	40T1024	6F	F29	24	76,55	74,55	83	58	30	40	8	0,392
40T10/25-2	40T1025	6F	F29	25	79,75	77,70	83	60	30	40	8	0,422
40T10/26-2	40T1026	6F	F30	26	82,90	80,90	87	60	30	40	8	0,480
40T10/27-2	40T1027	6F	F31	27	86,10	84,10	91	60	30	40	8	0,536
40T10/28-2	40T1028	6F	F32	28	89,25	87,25	93	60	30	40	8	0,590
40T10/30-2	40T1030	6F	F33	30	95,65	93,65	97	60	30	40	8	0,640
40T10/32-2	40T1032	6F	F35	32	102,00	100,00	106	65	30	40	10	0,703
40T10/36-2	40T1036	6F	F38	36	114,75	112,75	120	70	30	40	10	0,873
40T10/40-2	40T1040	6F	F41	40	127,45	125,45	131	80	30	40	10	1,067
40T10/44-0	40T1044	6	—	44	140,20	138,20	—	88	30	40	10	1,310
40T10/48-0	40T1048	6	—	48	152,95	150,95	—	95	30	40	16	1,516
40T10/60-0	40T1060	6	—	60	191,15	189,10	—	110	30	40	16	2,339

Materiał: aluminium 6082 T6 UNI 9006/4 odpowiedni do anodyzowania

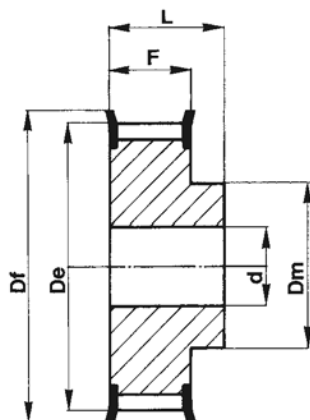

TYP 6F


T 10

podziałka 10 mm do paska o szerokości 32 mm

SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	IŁOŚĆ ZĘBÓW	Dp	De	Df	Dm	F	L	d	MASA Kg
47T10/18-2	47T1018	6F	F22	18	57,45	55,45	60	40	37	47	10	0,253
47T10/19-2	47T1019	6F	F25	19	60,65	58,65	66	44	37	47	10	0,286
47T10/20-2	47T1020	6F	F25	20	63,80	61,80	66	46	37	47	12	0,322
47T10/22-2	47T1022	6F	F27	22	70,20	68,20	75	52	37	47	12	0,393
47T10/24-2	47T1024	6F	F29	24	76,55	717,55	83	58	37	47	12	0,475
47T10/25-2	47T1025	6F	F29	25	79,75	77,70	83	60	37	47	12	0,527
47T10/26-2	47T1026	6F	F30	26	82,90	80,90	87	60	37	47	12	0,564
47T10/27-2	47T1027	6F	F31	27	86,10	84,10	91	60	37	47	12	0,602
47T10/28-2	47T1028	6F	F32	28	89,25	87,25	93	60	37	47	12	0,642
47T10/30-2	47T1030	6F	F33	30	95,65	93,65	97	60	37	47	12	0,740
47T10/32-2	47T1032	6F	F35	32	102,00	100,00	106	65	37	47	12	0,844
47T10/36-2	47T1036	6F	F38	36	114,75	112,75	120	70	37	47	16	1,063
47T10/40-2	47T1040	6F	F41	40	127,45	125,45	131	80	37	47	16	1,371
47T10/44-0	47T1044	6	—	44	140,20	138,20	—	88	37	47	16	1,611
47T10/48-0	47T1048	6	—	48	152,95	150,95	—	95	37	47	16	1,913
47T10/60-0	47T1060	6	—	60	191,10	189,10	—	110	37	47	16	3,004


T 10

podziałka 10 mm do paska o szerokości 50 mm

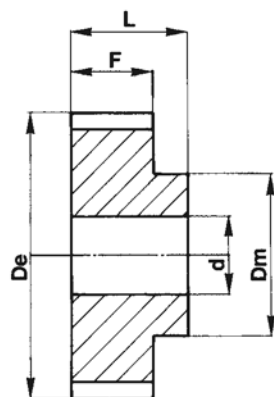


TYP 6


SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	IŁOŚĆ ZĘBÓW	Dp	De	Df	Dm	F	L	d	MASA Kg
66T10/18-2	66T1018	6F	F22	18	57,45	55,45	60	40	56	66	10	0,422
66T10/19-2	66T1019	6F	F25	19	60,65	58,65	66	44	56	66	10	0,466
66T10/20-2	66T1020	6F	F25	20	63,80	61,80	66	46	56	66	12	0,520
66T10/22-2	66T1022	6F	F27	22	70,20	68,20	75	52	56	66	12	0,640
66T10/24-2	66T1024	6F	F29	24	76,55	717,55	83	58	56	66	12	0,736
66T10/25-2	66T1025	6F	F29	25	79,75	77,70	83	60	56	66	12	0,766
66T10/26-2	66T1026	6F	F30	26	82,90	80,90	87	60	56	66	12	0,845
66T10/27-2	66T1027	6F	F31	27	86,10	84,10	91	60	56	66	12	0,946
66T10/28-2	66T1028	6F	F32	28	89,25	87,25	93	60	56	66	12	0,110
66T10/30-2	66T1030	6F	F33	30	95,65	93,65	97	60	56	66	12	1,170
66T10/32-2	66T1032	6F	F35	32	102,00	100,00	106	65	56	66	12	1,300
66T10/36-2	66T1036	6F	F38	36	114,75	112,75	120	70	56	66	16	1,637
66T10/40-2	66T1040	6F	F41	40	127,45	125,45	131	80	56	66	16	1,999
66T10/44-0	66T1044	6	—	44	140,20	138,20	—	88	56	66	16	2,420
66T10/48-0	66T1048	6	—	48	152,95	150,95	—	95	56	66	16	2,830
66T10/60-0	66T1060	6	—	60	191,10	189,10	—	110	56	66	16	4,366

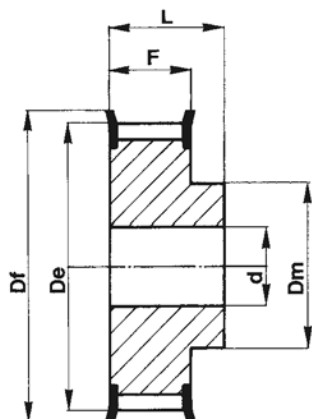

TYP 6F

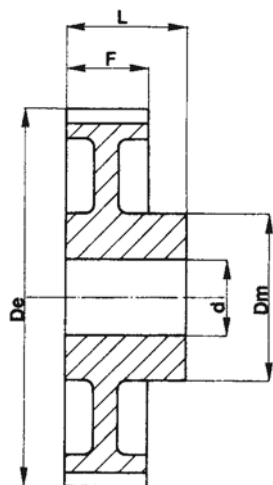

TYP 6W

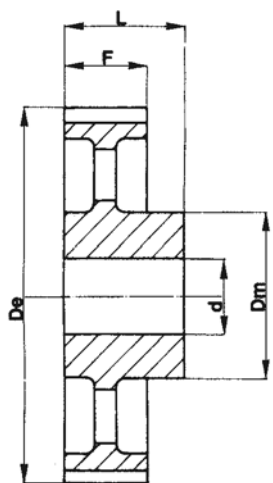

TYP 6A

T 20

podziałka 20 mm do paska o szerokości 32 mm

	SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	ILOŚĆ ZĘBÓW	De	Df	Dm	F	L	d	MASA Kg
ŻELIWO	53T20/18-2	53T2018	6F	F38	18	111,75	120	80	38	53	15	
	53T20/20-2	53T2020	6F	F43	20	124,50	138	90	38	53	15	
	53T20/22-2	53T2022	6F	F46	22	137,20	146	90	38	53	15	
	53T20/24-2	53T2024	6F	F50	24	149,95	158	95	38	53	15	
	53T20/25-2	53T2025	6F	F52	25	156,30	168	95	38	53	15	
	53T20/30-2	53T2030	6F	F59	30	188,15	200	110	38	53	15	
	53T20/32-2	53T2032	6W		32	200,85	-	110	38	53	18	
	53T20/36-2	53T2036	6W		36	226,35	-	110	38	53	18	
	53T20/40-2	53T2040	6A		40	251,80	-	110	38	53	20	
	53T20/48-2	53T2048	6A		48	302,70	-	130	38	53	20	
	53T20/60-2	53T2060	6A		60	379,10	-	130	38	53	20	
	53T20/72-2	53T2072	6A		72	455,50	-	140	38	53	20	

T 20

podziałka 20 mm do paska o szerokości 50 mm


	SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	ILOŚĆ ZĘBÓW	De	Df	Dm	F	L	d	MASA Kg
ŻELIWO	71T20/18-2	71T2018	6F	F38	18	111,75	120	80	56	71	18	
	71T20/20-2	71T2020	6F	F43	20	124,50	138	90	56	71	18	
	71T20/22-2	71T2022	6F	F46	22	137,20	146	90	56	71	18	
	71T20/24-2	71T2024	6F	F50	24	149,95	158	95	56	71	18	
	71T20/25-2	71T2025	6F	F52	25	156,30	168	95	56	71	18	
	71T20/30-2	71T2030	6F	F59	30	188,15	200	110	56	71	18	
	71T20/32-2	71T2032	6W		32	200,85	-	110	56	71	20	
	71T20/36-2	71T2036	6W		36	226,35	-	110	56	71	20	
	71T20/40-2	71T2040	6A		40	251,80	-	110	56	71	20	
	71T20/48-2	71T2048	6A		48	302,70	-	130	56	71	24	
	71T20/60-2	71T2060	6A		60	379,10	-	130	56	71	24	
	71T20/72-2	71T2072	6A		72	455,50	-	140	56	71	24	

T 20


podziałka 20 mm do paska o szerokości 100 mm

	SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	ILOŚĆ ZĘBÓW	De	Df	Dm	F	L	d	MASA Kg
ŻELIWO	123T20/18-2	123T2018	6F	F38	18	111,75	120	80	108	123	24	
	123T20/20-2	123T2020	6F	F43	20	124,50	138	90	108	123	24	
	123T20/22-2	123T2022	6F	F46	22	137,20	146	90	108	123	24	
	123T20/24-2	123T2024	6F	F50	24	149,95	158	95	108	123	24	
	123T20/25-2	123T2025	6F	F52	25	156,30	168	95	108	123	24	
	123T20/30-2	123T2030	6F	F59	30	188,15	200	110	108	123	24	
	123T20/32-2	123T2032	6W		32	200,85	-	110	108	123	32	
	123T20/36-2	123T2036	6W		36	226,35	-	110	108	123	32	
	123T20/40-2	123T2040	6A		40	251,80	-	110	108	123	32	
	123T20/48-2	123T2048	6A		48	302,70	-	130	108	123	32	
	123T20/60-2	123T2060	6A		60	379,10	-	130	108	123	32	
	123T20/72-2	123T2072	6A		72	455,50	-	140	108	123	32	


Koła pasowe zębate ST dla pasków AT

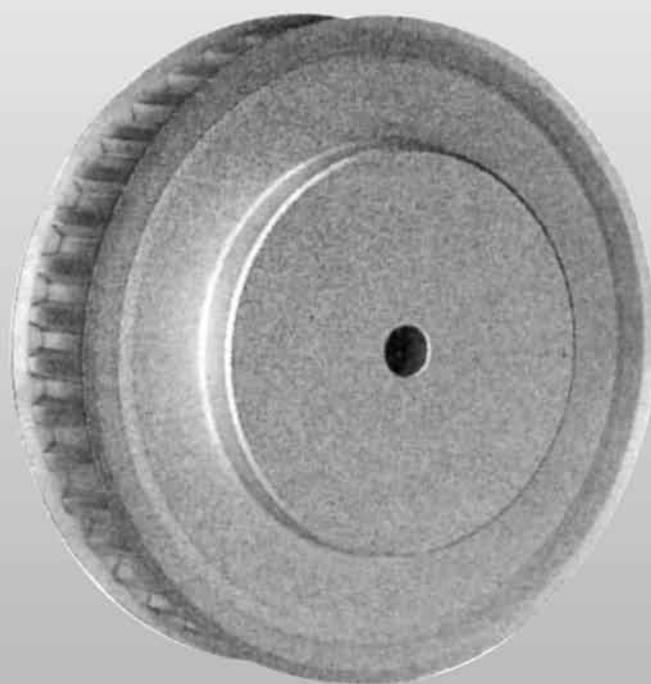

Materiał: aluminium 6082 T6 UNI 9006/4 odpowiedni do anodyzowania

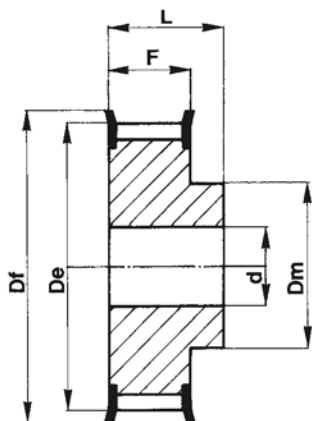

TYP 6F

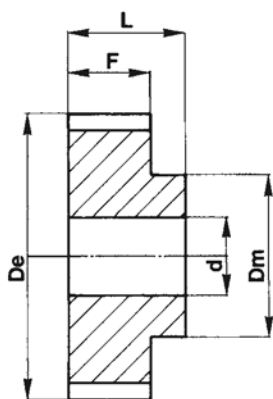

TYP 6

ST 5

podziałka 5 mm do paska o szerokości 10 mm

SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	IŁOŚĆ ZĘBÓW	De	Df	Dm	F	L	d	MASA Kg
21 ST5/12-2	21ST512	6F	F07	12	17,85	23,0	11	15	21	4	0,018
21 ST5/14-2	21ST514	6F	F08	14	21,05	25,0	14	15	21	4	0,019
21 ST5/15-2	21ST515	6F	F09	15	22,65	28,0	16	15	21	6	0,021
21 ST5/16-2	21ST516	6F	F10	16	24,20	32,0	18	15	21	6	0,025
21 ST5/18-2	21ST518	6F	F10	18	27,40	32,0	20	15	21	6	0,031
21 ST5/19-2	21ST519	6F	F12	19	29,00	36,0	22	15	21	6	0,036
21 ST5/20-2	21ST520	6F	F12	20	30,60	36,0	23	15	21	6	0,038
21 ST5/22-2	21ST522	6F	F14	22	33,85	38,0	24	15	21	6	0,048
21 ST5/24-2	21ST524	6F	F15	24	37,00	42,0	26	15	21	6	0,054
21 ST5/25-2	21ST525	6F	F17	25	38,60	44,0	26	15	21	6	0,058
21 ST5/26-2	21ST526	6F	F17	26	40,20	44,0	26	15	21	6	0,062
21 ST5/27-2	21ST527	6F	F18	27	41,80	48,0	30	15	21	8	0,064
21 ST5/28-2	21ST528	6F	F18	28	43,35	48,0	32	15	21	8	0,071
21 ST5/30-2	21ST530	6F	F19	30	46,55	51,0	34	15	21	8	0,076
21 ST5/32-2	21ST532	6F	F20	32	49,70	54,0	36	15	21	8	0,088
21 ST5/36-2	21ST536	6F	F24	36	56,05	64,0	38	15	21	8	0,114
21 ST5/40-2	21ST540	6F	F25	40	62,45	66,0	40	15	21	8	0,138
21 ST5/42-2	21ST542	6F	F26	42	65,60	70,0	40	15	21	8	0,180
21 ST5/44-0	21ST544	6		44	68,80	-	45	15	21	8	0,185
21 ST5/48-0	21ST548	6		48	75,15	-	50	15	21	8	0,200
21 ST5/60-0	21ST560	6		60	94,25	-	65	15	21	8	0,307

ST 5

podziałka 5 mm do paska o szerokości 16 mm

SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	IŁOŚĆ ZĘBÓW	De	Df	Dm	F	L	d	MASA Kg
27 ST5/12-2	27ST512	6F	F07	12	17,85	23,0	11	21	27	4	0,022
27 ST5/14-2	27ST514	6F	F08	14	21,05	25,0	14	21	27	4	0,026
27 ST5/15-2	27ST515	6F	F09	15	22,65	28,0	16	21	27	6	0,029
27 ST5/16-2	27ST516	6F	F10	16	24,20	32,0	18	21	27	6	0,035
27 ST5/18-2	27ST518	6F	F10	18	27,40	32,0	20	21	27	6	0,043
27 ST5/19-2	27ST519	6F	F12	19	29,00	36,0	22	21	27	6	0,049
27 ST5/20-2	27ST520	6F	F12	20	30,60	36,0	23	21	27	6	0,053
27 ST5/22-2	27ST522	6F	F14	22	33,85	38,0	24	21	27	6	0,054
27 ST5/24-2	27ST524	6F	F15	24	37,00	42,0	26	21	27	6	0,076
27 ST5/25-2	27ST525	6F	F17	25	38,60	44,0	26	21	27	6	0,081
27 ST5/26-2	27ST526	6F	F17	26	40,20	44,0	26	21	27	6	0,085
27 ST5/27-2	27ST527	6F	F18	27	41,80	48,0	30	21	27	8	0,090
27 ST5/28-2	27ST528	6F	F18	28	43,35	48,0	32	21	27	8	0,092
27 ST5/30-2	27ST530	6F	F19	30	46,55	51,0	34	21	27	8	0,105
27 ST5/32-2	27ST532	6F	F20	32	49,70	54,0	36	21	27	8	0,123
27 ST5/36-2	27ST536	6F	F24	36	56,05	64,0	38	21	27	8	0,160
27 ST5/40-2	27ST540	6F	F25	40	62,45	66,0	40	21	27	8	0,193
27 ST5/42-2	27ST542	6F	F26	42	65,60	70,0	40	21	27	8	0,205
27 ST5/44-0	27ST544	6		44	68,80	-	45	21	27	8	0,228
27 ST5/48-0	27ST548	6		48	75,15	-	50	21	27	8	0,280
27 ST5/60-0	27ST560	6		60	94,25	-	65	21	27	8	0,430

ST 5

podziałka 5 mm do paska o szerokości 25 mm


SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	IŁOŚĆ ZĘBÓW	De	Df	Dm	F	L	d	MASA Kg
36 ST5/12-2	36ST512	6F	F07	12	17,85	23,0	11	30	36	4	0,031
36 ST5/14-2	36ST514	6F	F08	14	21,05	25,0	14	30	36	4	0,037
36 ST5/15-2	36ST515	6F	F09	15	22,65	28,0	16	30	36	6	0,041
36 ST5/16-2	36ST516	6F	F10	16	24,20	32,0	18	30	36	6	0,050
36 ST5/18-2	36ST518	6F	F10	18	27,40	32,0	20	30	36	6	0,061
36 ST5/19-2	36ST519	6F	F12	19	29,00	36,0	22	30	36	6	0,070
36 ST5/20-2	36ST520	6F	F12	20	30,60	36,0	23	30	36	6	0,076
36 ST5/22-2	36ST522	6F	F14	22	33,85	38,0	24	30	36	6	0,080
36 ST5/24-2	36ST524	6F	F15	24	37,00	42,0	26	30	36	6	0,109
36 ST5/25-2	36ST525	6F	F17	25	38,60	44,0	26	30	36	6	0,118
36 ST5/26-2	36ST526	6F	F17	26	40,20	44,0	26	30	36	6	0,120
36 ST5/27-2	36ST527	6F	F18	27	41,80	48,0	30	30	36	8	0,128
36 ST5/28-2	36ST528	6F	F18	28	43,35	48,0	32	30	36	8	0,135
36 ST5/30-2	36ST530	6F	F19	30	46,55	51,0	34	30	36	8	0,150
36 ST5/32-2	36ST532	6F	F20	32	49,70	54,0	36	30	36	8	0,178
36 ST5/36-2	36ST536	6F	F24	36	56,05	64,0	38	30	36	8	0,230
36 ST5/40-2	36ST540	6F	F25	40	62,45	66,0	40	30	36	8	0,278
36 ST5/42-2	36ST542	6F	F26	42	65,60	70,0	40	30	36	8	0,284
36 ST5/44-0	36ST544	6		44	68,80	-	45	30	36	8	0,315
36 ST5/48-0	36ST548	6		48	75,15	-	50	30	36	8	0,400
36 ST5/60-0	36ST560	6		60	94,25	-	65	30	36	8	0,614

Materiał: aluminium 6082 T6 UNI 9006/4 odpowiedni do anodyzowania

ST 10

podziałka 10 mm do paska o szerokości 16 mm

SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	IŁOŚĆ ZĘBÓW	De	Df	Dm	F	L	d	MASA Kg
31 ST10/15-2	31ST115	6F	F19	15	45,90	51	31	21	31	8	0,118
31 ST10/16-2	31ST116	6F	F20	16	49,05	54	35	21	31	8	0,134
31 ST10/18-2	31ST118	6F	F22	18	55,45	60	40	21	31	8	0,167
31 ST10/19-2	31ST119	6F	F25	19	58,60	66	44	21	31	8	0,184
31 ST10/20-2	31ST120	6F	F25	20	61,80	66	46	21	31	8	0,208
31 ST10/22-2	31ST122	6F	F27	22	68,15	75	52	21	31	8	0,253
31 ST10/24-2	31ST124	6F	F29	24	74,55	83	58	21	31	8	0,288
31 ST10/25-2	31ST125	6F	F29	25	77,70	83	60	21	31	8	0,310
31 ST10/26-2	31ST126	6F	F30	26	80,90	87	60	21	31	8	0,357
31 ST10/27-2	31ST127	6F	F31	27	84,10	91	60	21	31	8	0,364
31 ST10/28-2	31ST128	6F	F32	28	87,25	93	60	21	31	8	0,401
31 ST10/30-2	31ST130	6F	F33	30	93,65	97	60	21	31	8	0,441
31 ST10/32-2	31ST132	6F	F35	32	100,00	106	65	21	31	10	0,493
31 ST10/36-2	31ST136	6F	F38	36	112,75	120	70	21	31	10	0,623
31 ST10/40-2	31ST140	6F	F42	40	125,45	135	80	21	31	10	0,787
31 ST10/44-0	31ST144	6		44	138,20	-	88	21	31	10	0,993
31 ST10/48-0	31ST148	6		48	150,95	-	95	21	31	16	1,090
31 ST10/60-0	31ST160	6		60	189,10	-	110	21	31	16	1,701

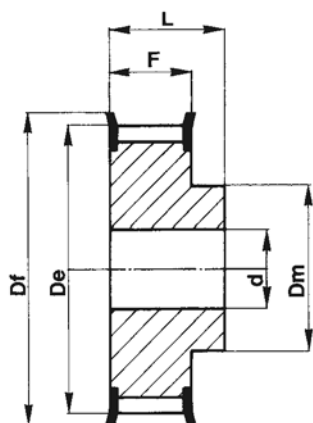


TYP 6F

ST 10

podziałka 10 mm do paska o szerokości 25 mm

SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	IŁOŚĆ ZĘBÓW	De	Df	Dm	F	L	d	MASA Kg
40 ST10/15-2	40ST115	6F	F19	15	45,90	51	32	30	40	8	0,152
40 ST10/16-2	40ST116	6F	F20	16	49,05	54	35	30	40	8	0,176
40 ST10/18-2	40ST118	6F	F22	18	55,45	60	40	30	40	8	0,224
40 ST10/19-2	40ST119	6F	F25	19	58,60	66	44	30	40	8	0,247
40 ST10/20-2	40ST120	6F	F25	20	61,80	66	46	30	40	8	0,276
40 ST10/22-2	40ST122	6F	F27	22	68,15	75	52	30	40	8	0,337
40 ST10/24-2	40ST124	6F	F29	24	71,75	83	58	30	40	8	0,392
40 ST10/25-2	40ST125	6F	F29	25	77,70	83	60	30	40	8	0,422
40 ST10/26-2	40ST126	6F	F30	26	80,90	87	60	30	40	8	0,477
40 ST10/27-2	40ST127	6F	F31	27	84,10	91	60	30	40	8	0,536
40 ST10/28-2	40ST128	6F	F32	28	87,25	93	60	30	40	8	0,540
40 ST10/30-2	40ST130	6F	F33	30	93,65	97	60	30	40	8	0,640
40 ST10/32-2	40ST132	6F	F35	32	100,00	106	65	30	40	10	0,703
40 ST10/36-2	40ST136	6F	F38	36	112,75	120	70	30	40	10	0,873
40 ST10/40-2	40ST140	6F	F42	40	125,45	135	80	30	40	10	1,067
40 ST10/44-0	40ST144	6		44	138,20	-	88	30	40	10	1,350
40 ST10/48-0	40ST148	6		48	150,95	-	95	30	40	16	1,516
40 ST10/60-0	40ST160	6		60	189,10	-	110	30	40	16	2,339

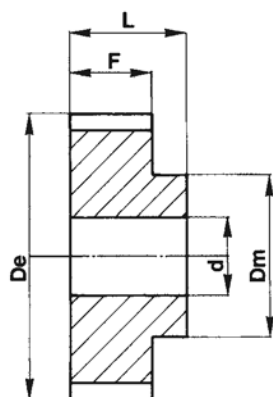


TYP 6

Materiał: aluminium 6082 T6 UNI
9006/4 odpowiedni do anodyzowania

ST 10


podziałka 10 mm do paska o szerokości 32 mm

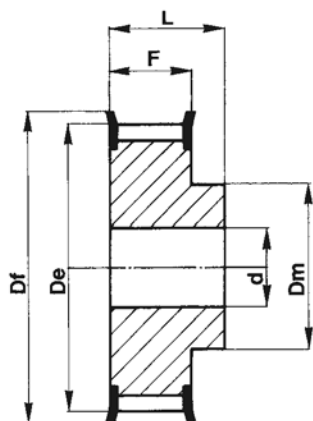

TYP 6F

ST 10

podziałka 10 mm do paska o szerokości 50 mm

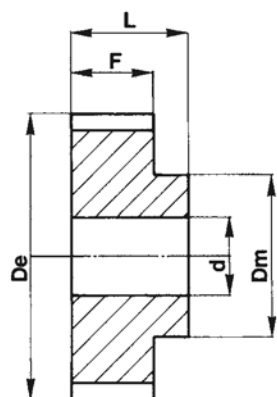



TYP 6

SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	IŁOŚĆ ZĘBÓW	De	Df	Dm	F	L	d	MASA Kg
47 ST10/18-2	47ST118	6F	F22	18	55,45	60	40	37	47	10	0,253
47 ST10/19-2	47ST119	6F	F25	19	58,60	66	44	37	47	10	0,286
47 ST10/20-2	47ST120	6F	F25	20	61,80	66	46	37	47	12	0,322
47 ST10/22-2	47ST122	6F	F27	22	68,15	75	52	37	47	12	0,393
47 ST10/24-2	47ST124	6F	F29	24	71,7,55	83	58	37	47	12	0,475
47 ST10/25-2	47ST125	6F	F29	25	77,70	83	60	37	47	12	0,527
47 ST10/26-2	47ST126	6F	F30	26	80,90	87	60	37	47	12	0,564
47 ST10/27-2	47ST127	6F	F31	27	84,10	91	60	37	47	12	0,602
47 ST10/28-2	47ST128	6F	F32	28	87,25	93	60	37	47	12	0,642
47 ST10/30-2	47ST130	6F	F33	30	93,65	97	60	37	47	12	0,740
47 ST10/32-2	47ST132	6F	F35	32	100,00	106	65	37	47	12	0,844
47 ST10/36-2	47ST136	6F	F38	36	112,75	120	70	37	47	16	1,063
47 ST10/40-2	47ST140	6F	F42	40	125,45	135	80	37	47	16	1,317
47 ST10/44-0	47ST144	6		44	138,20	-	88	37	47	16	1,611
47 ST10/48-0	47ST148	6		48	150,95	-	95	37	47	16	1,931
47 ST10/60-0	47ST160	6		60	189,10	-	110	37	47	16	3,004


SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	IŁOŚĆ ZĘBÓW	De	Df	Dm	F	L	d	MASA Kg
66 ST10/18-2	66ST118	6F	F22	18	55,45	60	40	56	66	10	0,422
66 ST10/19-2	66ST119	6F	F25	19	58,60	66	44	56	66	10	0,466
66 ST10/20-2	66ST120	6F	F25	20	61,80	66	46	56	66	12	0,520
66 ST10/22-2	66ST122	6F	F27	22	68,15	75	52	56	66	12	0,570
66 ST10/24-2	66ST124	6F	F29	24	71,7,55	83	58	56	66	12	0,736
66 ST10/25-2	66ST125	6F	F29	25	77,70	83	60	56	66	12	0,766
66 ST10/26-2	66ST126	6F	F30	26	80,90	87	60	56	66	12	0,816
66 ST10/27-2	66ST127	6F	F31	27	84,10	91	60	56	66	12	0,946
66 ST10/28-2	66ST128	6F	F32	28	87,25	93	60	56	66	12	0,960
66 ST10/30-2	66ST130	6F	F33	30	93,65	97	60	56	66	12	1,170
66 ST10/32-2	66ST132	6F	F35	32	100,00	106	65	56	66	12	1,300
66 ST10/36-2	66ST136	6F	F38	36	112,75	120	70	56	66	16	1,637
66 ST10/40-2	66ST140	6F	F42	40	125,45	135	80	56	66	16	1,999
66 ST10/44-0	66ST144	6		44	138,20	-	88	56	66	16	2,357
66 ST10/48-0	66ST148	6		48	150,95	-	95	56	66	16	2,830
66 ST10/60-0	66ST160	6		60	189,10	-	110	56	66	16	4,368

Koła pasowe HTD[®] do pasów zębatych

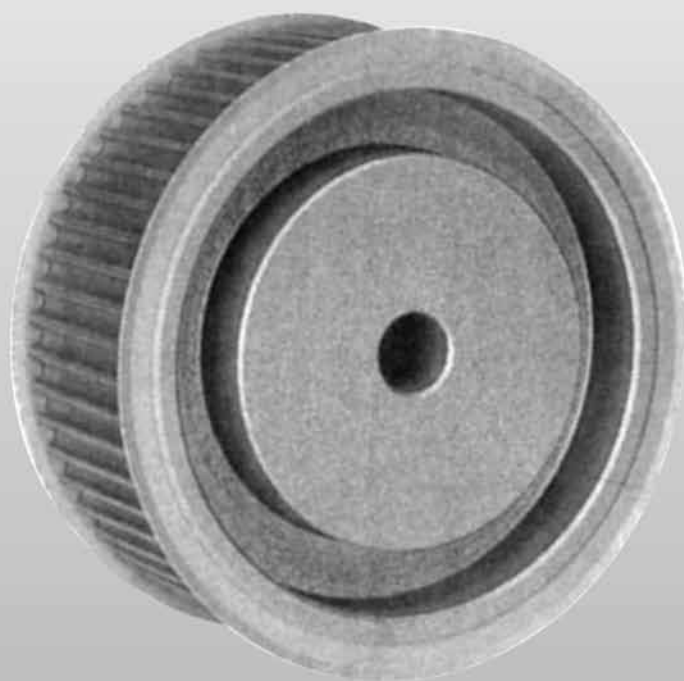


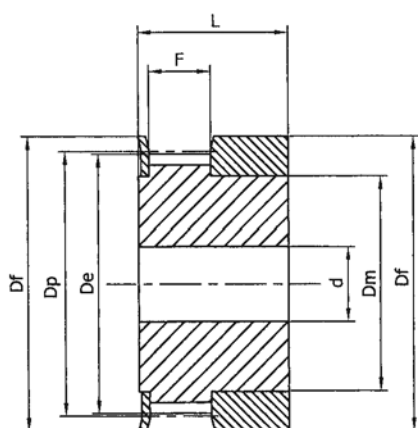

TYP 1F

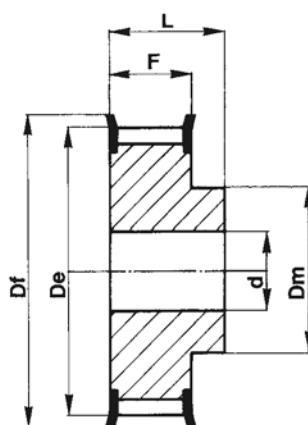

TYP 6F

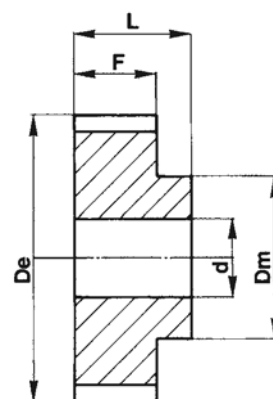

TYP 6

HTD® 3M-06


WŁAŚCIWOŚCI	SYMBOL KODU	NASZ KOD	TYP	TYP BANDY		Dp	De	Df	Dm	F	L	OTWÓR PILOTOWY	MASA Kg
ALUMINIUM 6082 T6 UNI 9006/4	Z BANDA	10- 3M- 06	03M0610	1F	F01	10	9,55	8,79	13	6	7,2	117,5	4
		12- 3M- 06	03M0612	1F	F02	12	11,46	10,70	15	8	7,2	117,5	4
		14- 3M- 06	03M0614	1F	F03	14	13,37	12,61	16	9,5	7,2	117,5	4
		15- 3M- 06	03M0615	1F	F04	15	14,32	13,56	17,5	11,6	7,2	117,5	4
		16- 3M- 06	03M0616	6F	F05	16	15,28	117,52	18	10	9,8	17,5	4
		18- 3M- 06	03M0618	6F	F06	18	17,19	16,43	20	11	9,8	17,5	6
		20- 3M- 06	03M0620	6F	F07	20	19,10	18,34	23	13	9,8	17,5	6
		21- 3M- 06	03M0621	6F	F08	21	20,05	19,29	25	13	9,8	17,5	6
		22- 3M- 06	03M0622	6F	F08	22	21,01	20,25	25	13	9,8	17,5	6
		24- 3M- 06	03M0624	6F	F08	24	22,92	22,16	25	13	9,8	17,5	6
		26- 3M- 06	03M0626	6F	F09	26	24,83	24,07	28	16	9,8	17,5	6
		28- 3M- 06	03M0628	6F	F10	28	26,74	25,98	32	18	9,8	17,5	6
		30- 3M- 06	03M0630	6F	F10	30	28,65	27,89	32	20	9,8	17,5	6
		32- 3M- 06	03M0632	6F	F12	32	30,56	29,80	36	22	9,8	17,5	6
		36- 3M- 06	03M0636	6F	F14	36	34,38	33,62	38	26	10,3	18	6
		40- 3M- 06	03M0640	6F	F15	40	38,20	37,44	42	28	10,3	18	6
		44- 3M- 06	03M0644	6F	F18	44	42,02	41,26	48	33	10,3	18	6
	WITHOUT FLANGES	48- 3M- 06	03M0648	6		48	45,84	45,08	—	33	10,3	18,6	8
		60- 3M- 06	03M0660	6		60	57,30	56,54	—	33	10,3	18,6	8
		72- 3M- 06	03M0672	6		72	68,75	67,99	—	33	10,3	18,6	8

HTD® 3M-09


WŁAŚCIWOŚCI		SYMBOL KODU	NASZ KOD	TYP	TYP BANDY		Dp	De	Df	Dm	F	L	OTWÓR PILOTOWY	MASA Kg
ALUMINIUM 6082 T6 UNI 9006/4	Z BANDA	10- 3M- 09	03M0910	1F	F01	10	9,55	8,79	13	6	10,2	17,5	4	0,004
		12- 3M- 09	03M0912	1F	F02	12	11,46	10,70	15	8	10,2	17,5	4	0,006
		14- 3M- 09	03M0914	1F	F03	14	13,37	12,61	16	9,5	10,2	17,5	4	0,007
		15- 3M- 09	03M0915	1F	F04	15	14,32	13,56	17,5	11,6	10,2	17,5	4	0,008
		16- 3M- 09	03M0916	6F	F05	16	15,28	117,52	18	10	12,8	20,6	4	0,007
		18- 3M- 09	03M0918	6F	F06	18	17,19	16,43	20	11	12,8	20,6	6	0,008
		20- 3M- 09	03M0920	6F	F07	20	19,10	18,34	23	13	12,8	20,6	6	0,010
		21- 3M- 09	03M0921	6F	F08	21	20,05	19,29	25	13	12,8	20,6	6	0,013
		22- 3M- 09	03M0922	6F	F08	22	21,01	20,25	25	13	12,8	20,6	6	0,014
		24- 3M- 09	03M0924	6F	F08	24	22,92	22,16	25	13	12,8	20,6	6	0,016
		26- 3M- 09	03M0926	6F	F09	26	24,83	24,07	28	16	12,8	20,6	6	0,018
		28- 3M- 09	03M0928	6F	F10	28	26,74	25,98	32	18	12,8	20,6	6	0,024
		30- 3M- 09	03M0930	6F	F10	30	28,65	27,89	32	20	12,8	20,6	6	0,028
		32- 3M- 09	03M0932	6F	F12	32	30,56	29,80	36	22	12,8	20,6	6	0,032
		36- 3M- 09	03M0936	6F	F14	36	34,38	33,62	38	26	13,4	22,2	6	0,045
		40- 3M- 09	03M0940	6F	F15	40	38,20	37,44	42	28	13,4	22,2	6	0,055
		44- 3M- 09	03M0944	6F	F18	44	42,02	41,26	48	33	13,4	22,2	6	0,074
	WITHOUT FLANGES	48- 3M- 09	03M0948	6		48	45,84	45,08	—	33	13,4	22,2	8	0,074
		60- 3M- 09	03M0960	6		60	57,30	56,54	—	33	13,4	22,2	8	0,106
		72- 3M- 09	03M0972	6		72	68,75	67,99	—	33	13,4	22,2	8	0,145

HTD® 3M-15

WŁAŚCIWOŚCI		SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	ILOŚĆ ZĘBÓW	Dp	De	Df	Dm	F	L	OTWÓR PILOTOWY	MASA Kg
ALUMINIUM 6082 T6 UNI 9006/4	Z BANDA	10- 3M- 15	03M1510	1F	F01	10	9,55	8,79	13	6	17	26	4	0,006
		12- 3M- 15	03M1512	1F	F02	12	11,46	10,70	15	8	17	26	4	0,008
		14- 3M- 15	03M1514	1F	F03	14	13,37	12,61	16	9,5	17	26	4	0,010
		15- 3M- 15	03M1515	1F	F04	15	14,32	13,56	17,5	11,6	17	26	4	0,012
		16- 3M- 15	03M1516	6F	F05	16	15,28	117,52	18	10	19,5	26	4	0,010
		18- 3M- 15	03M1518	6F	F06	18	17,19	16,43	20	11	19,5	26	6	0,012
		20- 3M- 15	03M1520	6F	F07	20	19,10	18,34	23	12	19,5	26	6	0,014
		21- 3M- 15	03M1521	6F	F08	21	20,05	19,29	25	13	19,5	26	6	0,016
		22- 3M- 15	03M1522	6F	F08	22	21,01	20,25	25	13	19,5	26	6	0,018
		24- 3M- 15	03M1524	6F	F08	24	22,92	22,16	25	13	19,5	26	6	0,020
		26- 3M- 15	03M1526	6F	F09	26	24,83	24,07	28	16	19,5	26	6	0,027
		28- 3M- 15	03M1528	6F	F10	28	26,74	25,98	32	18	19,5	26	6	0,030
		30- 3M- 15	03M1530	6F	F10	30	28,65	27,89	32	20	19,5	26	6	0,035
		32- 3M- 15	03M1532	6F	F12	32	30,56	29,80	36	22	19,5	26	6	0,042
		36- 3M- 15	03M1536	6F	F14	36	34,38	33,62	38	26	20	30	6	0,060
		40- 3M- 15	03M1540	6F	F15	40	38,20	37,44	42	28	20	30	6	0,075
		44- 3M- 15	03M1544	6F	F18	44	42,02	41,26	48	33	20	30	6	0,095
	WITHOUT FLANGES	48- 3M- 15	03M1548	6		48	45,84	45,08	—	33	20	30	8	0,103
		60- 3M- 15	03M1560	6		60	57,30	56,54	—	33	20	30	8	0,150
		72- 3M- 15	03M1572	6		72	68,75	67,99	—	33	20	30	8	0,212

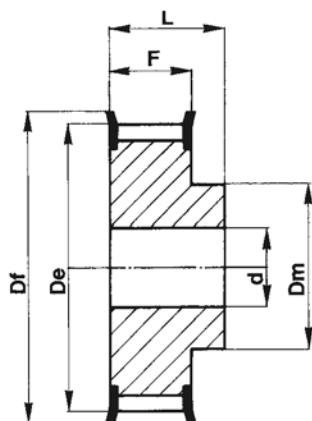

TYP 6F

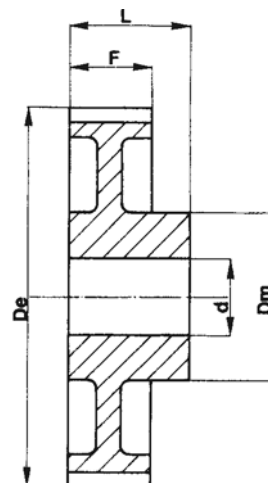

TYP 6W

HTD® 5M-09


WŁAŚCIWOŚCI		SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	ILOŚĆ ZĘBÓW	Dp	De	Df	Dm	Di	F	L	OTWÓR PILOTOWY	MASA Kg
STAL	Z BANDA	12- 5M- 09	05M0912	6F	F07	12	19,10	17,96	23	12	—	117,5	20	4	0,028
		14- 5M- 09	05M0914	6F	F08	14	22,28	21,14	25	13	—	117,5	20	6	0,034
		15- 5M- 09	05M0915	6F	F09	15	23,87	22,73	28	16	—	117,5	20	6	0,042
		16- 5M- 09	05M0916	6F	F09	16	25,46	24,32	28	16,5	—	117,5	20	6	0,050
		18- 5M- 09	05M0918	6F	F10	18	28,65	27,51	32	20	—	117,5	20	6	0,070
		20- 5M- 09	05M0920	6F	F12	20	31,83	30,70	36	23	—	117,5	22,5	6	0,094
		21- 5M- 09	05M0921	6F	F14	21	33,42	32,28	38	24	—	117,5	22,5	6	0,110
		22- 5M- 09	05M0922	6F	F14	22	35,01	33,87	38	25,5	—	117,5	22,5	6	0,118
		24- 5M- 09	05M0924	6F	F15	24	38,20	37,06	42	27	—	117,5	22,5	6	0,145
		26- 5M- 09	05M0926	6F	F17	26	41,38	40,24	44	30	—	117,5	22,5	6	0,170
		28- 5M- 09	05M0928	6F	F18	28	417,56	43,42	48	30,5	—	117,5	22,5	6	0,200
		30- 5M- 09	05M0930	6F	F19	30	47,75	46,60	51	35	—	117,5	22,5	6	0,236
		32- 5M- 09	05M0932	6F	F20	32	50,93	49,79	54	38	—	117,5	22,5	8	0,210
		36- 5M- 09	05M0936	6F	F22	36	57,30	56,16	60	38	—	117,5	22,5	8	0,324
		40- 5M- 09	05M0940	6F	F26	40	63,66	62,52	70	38	—	117,5	22,5	8	0,400
ALUMINIUM	BEZ BANDY	44- 5M- 09	05M0944	6W		44	70,03	68,89	—	38	54	117,5	25,5	8	0,170
		48- 5M- 09	05M0948	6W		48	76,39	75,25	—	45	61	117,5	25,5	8	0,182
		60- 5M- 09	05M0960	6W		60	95,46	94,35	—	45	80	117,5	25,5	8	0,230
		72- 5M- 09	05M0972	6W		72	1117,59	113,45	—	45	100	117,5	25,5	8	0,270

HTD® 5M-15


WŁAŚCIWOŚCI		SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	IŁOŚĆ ZĘBÓW	Dp	De	Df	Dm	Di	F	L	OTWÓR PILOTOWY	MASA Kg
STAL	Z BANDA	12- 5M- 09	05M1512	6F	F07	12	19,10	17,96	23	12	—	20,5	26	4	0,034
		14- 5M- 09	05M1514	6F	F08	14	22,28	21,14	25	13	—	20,5	26	6	0,046
		15- 5M- 09	05M1515	6F	F09	15	23,87	22,73	28	16	—	20,5	26	6	0,056
		16- 5M- 09	05M1516	6F	F09	16	25,46	24,32	28	16,5	—	20,5	26	6	0,064
		18- 5M- 09	05M1518	6F	F10	18	28,65	27,51	32	20	—	20,5	26	6	0,086
		20- 5M- 09	05M1520	6F	F12	20	31,83	30,70	36	23	—	20,5	26	6	0,112
		21- 5M- 09	05M1521	6F	F14	21	33,42	32,28	38	24	—	20,5	26	6	0,130
		22- 5M- 09	05M1522	6F	F14	22	35,01	33,87	38	25,5	—	20,5	26	6	0,140
		24- 5M- 09	05M1524	6F	F15	24	38,20	37,06	42	27	—	20,5	28	6	0,180
		26- 5M- 09	05M1526	6F	F17	26	41,38	40,24	44	30	—	20,5	28	6	0,220
		28- 5M- 09	05M1528	6F	F18	28	417,56	43,42	48	30,5	—	20,5	28	6	0,250
		30- 5M- 09	05M1530	6F	F19	30	47,75	46,60	51	35	—	20,5	28	6	0,300
		32- 5M- 09	05M1532	6F	F20	32	50,93	49,79	54	38	—	20,5	28	8	0,350
		36- 5M- 09	05M1536	6F	F24	36	57,30	56,16	60	38	—	20,5	28	8	0,426
		40- 5M- 09	05M1540	6F	F26	40	63,66	62,52	70	38	—	20,5	28	8	0,520
ALUMINIUM	BEZ BANDY	44- 5M- 09	05M1544	6W		44	70,03	68,89	—	38	54	20,5	30	8	0,225
		48- 5M- 09	05M1548	6W		48	76,39	75,25	—	45	61	20,5	30	8	0,187
		60- 5M- 09	05M1560	6W		60	95,46	94,35	—	45	80	20,5	30	8	0,305
		72- 5M- 09	05M1572	6W		72	1117,59	113,45	—	45	100	20,5	30	8	0,305

HTD® 5M-25


WŁAŚCIWOŚCI		SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	IŁOŚĆ ZĘBÓW	Dp	De	Df	Dm	Di	F	L	OTWÓR PILOTOWY	MASA Kg
STAL	Z BANDA	12- 5M- 25	05M2512	6F	F07	12	19,10	17,96	23	12	—	30,5	36	4	0,050
		14- 5M- 25	05M2514	6F	F08	14	22,28	21,14	25	13	—	30,5	36	6	0,070
		15- 5M- 25	05M2515	6F	F09	15	23,87	22,73	28	16	—	30,5	36	6	0,080
		16- 5M- 25	05M2516	6F	F09	16	25,46	24,32	28	16,5	—	30,5	36	6	0,100
		18- 5M- 25	05M2518	6F	F10	18	28,65	27,51	32	20	—	30,5	36	6	0,120
		20- 5M- 25	05M2520	6F	F12	20	31,83	30,70	36	23	—	30,5	36	6	0,160
		21- 5M- 25	05M2521	6F	F14	21	33,42	32,28	38	24	—	30,5	38	6	0,190
		22- 5M- 25	05M2522	6F	F14	22	35,01	33,87	38	25,5	—	30,5	38	6	0,210
		24- 5M- 25	05M2524	6F	F15	24	38,20	37,06	42	27	—	30,5	38	6	0,250
		26- 5M- 25	05M2526	6F	F17	26	41,38	40,24	44	30	—	30,5	38	6	0,300
		28- 5M- 25	05M2528	6F	F18	28	417,56	43,42	48	30,5	—	30,5	38	6	0,350
		30- 5M- 25	05M2530	6F	F19	30	47,75	46,60	51	35	—	30,5	38	6	0,420
		32- 5M- 25	05M2532	6F	F20	32	50,93	49,79	54	38	—	30,5	38	8	0,480
		36- 5M- 25	05M2536	6F	F24	36	57,30	56,16	60	38	—	30,5	38	8	0,590
		40- 5M- 25	05M2540	6F	F26	40	63,66	62,52	70	38	—	30,5	38	8	0,740
ALUMINIUM	BEZ BANDY	44- 5M- 25	05M2544	6W		44	70,03	68,89	—	38	54	30,5	40	8	0,320
		48- 5M- 25	05M2548	6W		48	76,39	75,25	—	45	61	30,5	40	8	0,275
		60- 5M- 25	05M2560	6W		60	95,46	94,35	—	45	80	30,5	40	8	0,435
		72- 5M- 25	05M2572	6W		72	1117,59	113,45	—	45	100	30,5	40	8	0,525

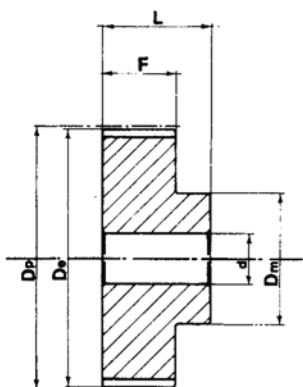


TYP 6

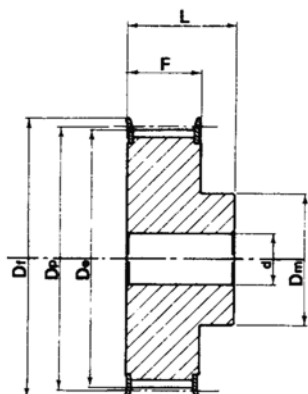


TYP 6F

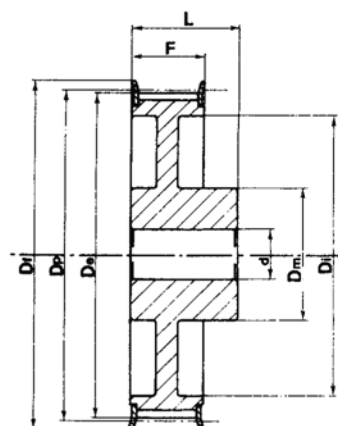


TYP 6WF

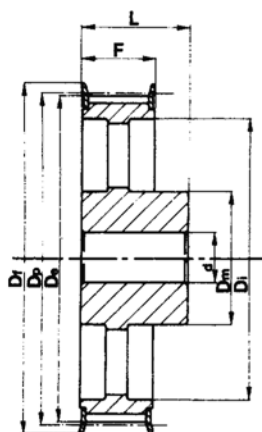


TYP 6AF

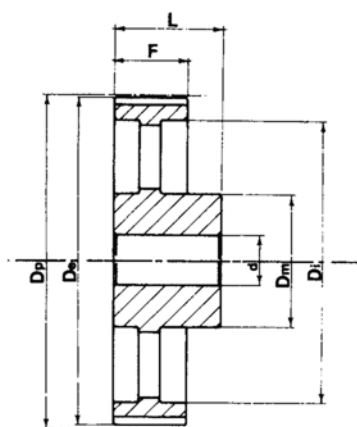


TYP 6A

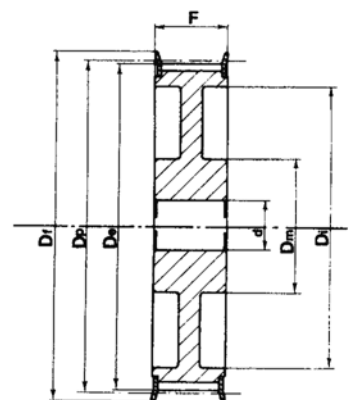

TYP 10WF

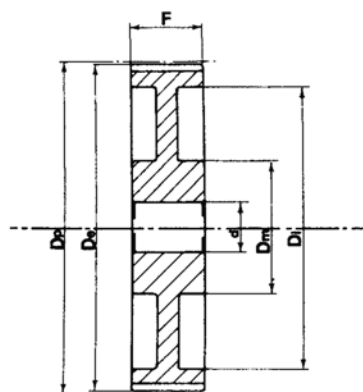

TYP 10W

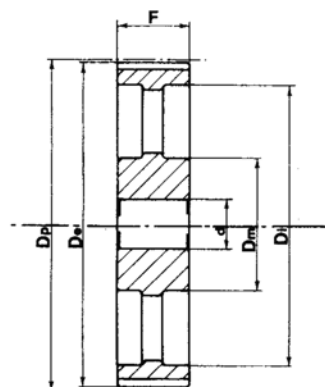

TYP 10A

HTD® 8M-20

WŁAŚCIWOŚCI		SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	IŁOŚĆ ZĘBÓW	Dp	De	Df	Dm	Di	F	L	d	MASA Kg
STAL	Z BANDA	22- 8M- 20	08M2022	6F	F22	22	56,02	54,65	60	43	—	28	38	12	0,54
		24- 8M- 20	08M2024	6F	F25	24	61,12	59,75	66	45	—	28	38	12	0,65
		26- 8M- 20	08M2026	6F	F26	26	66,21	64,84	70	48	—	28	38	12	0,80
		28- 8M- 20	08M2028	6F	F27	28	71,30	70,08	75	50	—	28	38	15	0,87
		30- 8M- 20	08M2030	6F	F29	30	76,39	75,13	83	55	—	28	38	15	1,02
		32- 8M- 20	08M2032	6F	F30	32	81,49	80,16	87	60	—	28	38	15	1,20
		34- 8M- 20	08M2034	6F	F31	34	86,58	85,22	91	70	—	28	38	15	1,40
		36- 8M- 20	08M2036	6F	F33	36	91,67	90,30	97	75	—	28	38	15	1,55
		38- 8M- 20	08M2038	6F	F34	38	96,77	95,39	102	75	—	28	38	15	1,65
		40- 8M- 20	08M2040	6F	F35	40	101,86	100,49	106	75	—	28	38	15	1,74
		44- 8M- 20	08M2044	6F	F38	44	112,05	110,67	120	75	—	28	38	15	2,10
		48- 8M- 20	08M2048	6F	F40	48	122,23	120,86	128	75	—	28	38	15	2,44
		56- 8M- 20	08M2056	6WF	F48	56	142,60	141,23	150	80	116	28	38	15	2,60
		64- 8M- 20	08M2064	6WF	F52	64	162,97	161,60	168	80	137	28	38	15	2,90
		72- 8M- 20	08M2072	6WF	F57	72	183,35	181,97	192	80	158	28	38	15	3,10
ŻELIWO	BEZ BANDY	80- 8M- 20	08M2080	6W		80	203,72	202,35	—	90	180	28	38	15	3,80
		90- 8M- 20	08M2090	6A		90	229,18	227,81	—	90	204	28	38	15	4,20
		112- 8M- 20	08M2011	6A		112	285,21	283,83	—	90	254	28	38	18	5,20
		144- 8M- 20	08M2014	6A		144	366,70	365,32	—	90	336	28	38	20	7,50
		168- 8M- 20	08M2016	6A		168	427,81	426,44	—	100	400	28	38	20	10,00
		192- 8M- 20	08M2019	6A		192	488,92	487,55	—	100	460	28	38	20	14,40

HTD® 8M-30


WŁAŚCIWOŚCI		SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	IŁOŚĆ ZĘBÓW	Dp	De	Df	Dm	Di	F	L	d	MASA Kg
STAL	Z BANDA	22- 8M- 20	08M3022	6F	F22	22	56,02	54,65	60	43	—	38	48	12	0,70
		24- 8M- 20	08M3024	6F	F25	24	61,12	59,75	66	45	—	38	48	12	0,84
		26- 8M- 20	08M3026	6F	F26	26	66,21	64,84	70	48	—	38	48	12	1,00
		28- 8M- 20	08M3028	6F	F27	28	71,30	70,08	75	50	—	38	48	15	1,12
		30- 8M- 20	08M3030	6F	F29	30	76,39	75,13	83	55	—	38	48	15	1,32
		32- 8M- 20	08M3032	6F	F30	32	81,49	80,16	87	60	—	38	48	15	1,53
		34- 8M- 20	08M3034	6F	F31	34	86,58	85,22	91	70	—	38	48	15	1,80
		36- 8M- 20	08M3036	6F	F33	36	91,67	90,30	97	75	—	38	48	15	1,99
		38- 8M- 20	08M3038	6F	F34	38	96,77	95,39	102	75	—	38	48	15	2,27
		40- 8M- 20	08M3040	6F	F35	40	101,86	100,49	106	75	—	38	48	15	2,40
		44- 8M- 20	08M3044	6F	F38	44	112,05	110,67	120	75	—	38	48	15	2,80
		48- 8M- 20	08M3048	6F	F40	48	122,23	120,86	128	75	—	38	48	15	3,20
		56- 8M- 20	08M3056	6WF	F48	56	142,60	141,23	150	90	116	38	48	15	3,60
		64- 8M- 20	08M3064	6WF	F52	64	162,97	161,60	168	90	137	38	48	15	4,30
		72- 8M- 20	08M3072	6WF	F57	72	183,35	181,97	192	95	158	38	48	15	4,80
ŻELIWO	BEZ BANDY	80- 8M- 20	08M3080	6W		80	203,72	202,35	—	100	180	38	48	15	5,10
		90- 8M- 20	08M3090	6A		90	229,18	227,81	—	100	204	38	48	15	5,70
				6A		112	285,21	283,83	—	100	254	38	48	18	6,80
		112- 8M- 20	08M3011	6A		144	366,70	365,32	—	100	336	38	48	20	9,30
		144- 8M- 20	08M3014	6A		168	427,81	426,44	—	100	400	38	48	20	11,40
		168- 8M- 20	08M3016	6A		192	488,92	487,55	—	100	460	38	48	20	16,00
		192- 8M- 20	08M3019												

HTD® 8M-50


WŁAŚCIWOŚCI		SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	ILOŚĆ ZĘBÓW	Dp	De	Df	Dm	Di	F	L	d	MASA Kg
STAL	Z BANDA	22- 8M- 50	08M5022	6F	F22	22	56,02	54,65	60	43	—	60	70	12	1,00
		24- 8M- 50	08M5024	6F	F25	24	61,12	59,75	66	45	—	60	70	12	1,23
		26- 8M- 50	08M5026	6F	F26	26	66,21	64,84	70	48	—	60	70	15	1,50
		28- 8M- 50	08M5028	6F	F27	28	71,30	70,08	75	50	—	60	70	15	1,67
		30- 8M- 50	08M5030	6F	F29	30	76,39	75,13	83	55	—	60	70	15	1,97
		32- 8M- 50	08M5032	6F	F30	32	81,49	80,16	87	60	—	60	70	15	2,27
		34- 8M- 50	08M5034	6F	F31	34	86,58	85,22	91	66	—	60	70	15	2,70
		36- 8M- 50	08M5036	6F	F33	36	91,67	90,30	97	70	—	60	70	15	2,97
		38- 8M- 50	08M5038	6F	F34	38	96,77	95,39	102	75	—	60	70	15	3,23
		40- 8M- 50	08M5040	6F	F35	40	101,86	100,49	106	75	—	60	70	18	3,50
		44- 8M- 50	08M5044	6F	F38	44	112,05	110,67	120	75	—	60	70	18	3,90
		48- 8M- 50	08M5048	6F	F40	48	122,23	120,86	128	80	—	60	70	18	4,30
		56- 8M- 50	08M5056	10WF	F48	56	142,60	141,23	150	90	116	60	60	18	5,00
		64- 8M- 50	08M5064	10WF	F52	64	162,97	161,60	168	100	137	60	60	18	5,60
		72- 8M- 50	08M5072	10WF	F57	72	183,35	181,97	192	100	158	60	60	18	6,80
ŻELIWO	BEZ BANDY	80- 8M- 50	08M5080	10W		80	203,72	202,35	—	110	180	60	60	18	6,90
		90- 8M- 50	08M5090	10A		90	229,18	227,81	—	110	204	60	60	18	8,60
		112- 8M- 50	08M5011	10A		112	285,21	283,83	—	110	254	60	60	18	9,60
		144- 8M- 50	08M5014	10A		144	366,70	365,32	—	110	336	60	60	20	13,80
		168- 8M- 50	08M5016	10A		168	427,81	426,44	—	120	400	60	60	20	16,00
		192- 8M- 50	08M5019	10A		192	488,92	487,55	—	130	460	60	60	20	22,40

HTD® 8M-85


WŁAŚCIWOŚCI		SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	ILOŚĆ ZĘBÓW	Dp	De	Df	Dm	Di	F	L	d	MASA Kg
STAL	Z BANDA	22- 8M- 85	08M8522	6F	F22	22	56,02	54,65	60	43	—	95	105	12	1,55
		24- 8M- 85	08M8524	6F	F25	24	61,12	59,75	66	45	—	95	105	12	1,90
		26- 8M- 85	08M8526	6F	F26	26	66,21	64,84	70	48	—	95	105	12	2,25
		28- 8M- 85	08M8528	6F	F27	28	71,30	70,08	75	50	—	95	105	15	2,55
		30- 8M- 85	08M8530	6F	F29	30	76,39	75,13	83	55	—	95	105	15	3,00
		32- 8M- 85	08M8532	6F	F30	32	81,49	80,16	87	60	—	95	105	15	3,57
		34- 8M- 85	08M8534	6F	F31	34	86,58	85,22	91	66	—	95	105	15	4,00
		36- 8M- 85	08M8536	6F	F33	36	91,67	90,30	97	70	—	95	105	15	17,50
		38- 8M- 85	08M8538	6F	F34	38	96,77	95,39	102	75	—	95	105	15	5,00
		40- 8M- 85	08M8540	6F	F35	40	101,86	100,49	106	75	—	95	105	18	5,20
		44- 8M- 85	08M8544	6F	F38	44	112,05	110,67	120	75	—	95	105	18	6,60
		48- 8M- 85	08M8548	6F	F40	48	122,23	120,86	128	80	—	95	105	18	7,00
		56- 8M- 85	08M8556	6F	F48	56	142,60	141,23	150	90	—	95	105	18	10,00
		64- 8M- 85	08M8564	10WF	F52	64	162,97	161,60	168	100	137	95	95	20	10,40
		72- 8M- 85	08M8572	10WF	F57	72	183,35	181,97	192	100	158	95	95	20	11,40
ŻELIWO	BEZ BANDY	80- 8M- 85	08M8580	10W		80	203,72	202,35	—	110	180	95	95	20	11,10
		90- 8M- 85	08M8590	10A		90	229,18	227,81	—	110	204	95	95	20	12,20
		112- 8M- 85	08M8511	10A		112	285,21	283,83	—	110	254	95	95	24	15,00
		144- 8M- 85	08M8514	10A		144	366,70	365,32	—	110	336	95	95	24	21,50
		168- 8M- 85	08M8516	10A		168	427,81	426,44	—	120	400	95	95	24	24,10
		192- 8M- 85	08M8519	10A		192	488,92	487,55	—	130	460	95	95	24	30,60

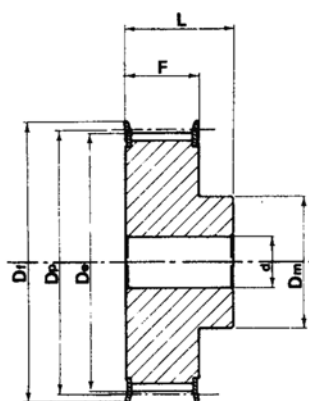

TYP 6F

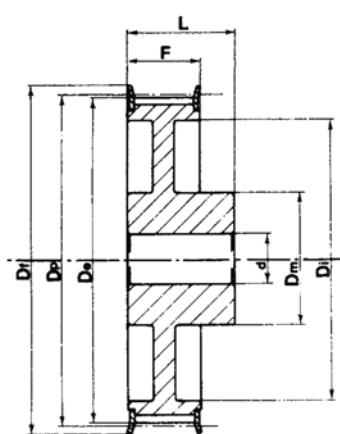

TYP 6WF

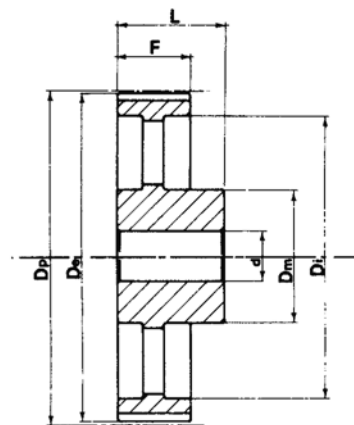

TYP 6A

HTD® 14M-40

WŁAŚCIWOŚCI		SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	IŁOŚĆ ZĘBÓW	Dp	De	Df	Dm	Di	F	L	d	MASA Kg
STAL	Z BANDA	28- 14M- 40	14M4028	6F	F40	28	124,78	122,12	128	100	—	54	70	24	4,73
		29- 14M- 40	14M4029	6F	F43	29	129,23	126,57	138	100	—	54	70	24	5,09
		30- 14M- 40	14M4030	6F	F43	30	133,70	130,99	138	100	—	54	70	24	5,45
		32- 14M- 40	14M4032	6F	F49	32	142,60	139,88	154	100	—	54	70	24	6,17
		34- 14M- 40	14M4034	6F	F51	34	151,52	148,79	160	100	—	54	70	24	6,88
		36- 14M- 40	14M4036	6F	F52	36	160,43	157,68	168	100	—	54	70	24	7,60
		38- 14M- 40	14M4038	6F	F81	38	170,34	166,60	184	120	—	54	70	24	8,28
		40- 14M- 40	14M4040	6F	F33	40	178,25	175,49	188	120	—	54	70	24	9,26
		44- 14M- 40	14M4044	6F	F61	44	196,08	193,28	212	120	—	54	70	24	10,32
ŻELIWO	Z BANDA	48- 14M- 40	14M4048	6WF	F62	48	213,90	211,11	226	135	170	54	70	28	11,50
		56- 14M- 40	14M4056	6WF	F66	56	249,55	246,76	256	135	207	54	70	28	13,05
		64- 14M- 40	14M4064	6WF	F70	64	285,21	282,41	296	135	240	54	70	28	14,40
	BEZ BANDY	72- 14M- 40	14M4072	6A		72	320,86	318,06	—	135	278	54	70	28	16,90
		80- 14M- 40	14M4080	6A		80	356,51	353,71	—	135	314	54	70	28	18,50
		90- 14M- 40	14M4090	6A		90	401,07	398,28	—	135	358	54	70	28	20,00
		112- 14M- 40	14M4011	6A		112\	499,11	496,32	—	135	456	54	70	28	26,70
		144- 14M- 40	14M4014	6A		144	641,71	638,92	—	135	600	54	70	28	35,00
		168- 14M- 40	14M4016	6A		168	748,66	745,87	—	135	706	54	70	28	44,20
		192- 14M- 40	14M4019	6A		192	855,62	852,82	—	135	813	54	70	28	52,20
		216- 14M- 40	14M4021	6A		216	962,57	959,76	—	150	920	54	70	28	62,50

HTD® 14M-55

WŁAŚCIWOŚCI		SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	IŁOŚĆ ZĘBÓW	Dp	De	Df	Dm	Di	F	L	d	MASA Kg
STAL	Z BANDA	28- 14M- 55	14M5528	6F	F40	28	124,78	122,12	128	100	—	70	85	24	5,60
		29- 14M- 55	14M5529	6F	F43	29	129,23	126,57	138	100	—	70	85	24	6,10
		30- 14M- 55	14M5530	6F	F43	30	133,70	130,99	138	100	—	70	85	24	6,60
		32- 14M- 55	14M5532	6F	F49	32	142,60	139,88	154	100	—	70	85	24	7,60
		34- 14M- 55	14M5534	6F	F51	34	151,52	148,79	160	100	—	70	85	24	8,60
		36- 14M- 55	14M5536	6F	F52	36	160,43	157,68	168	100	—	70	85	24	9,60
		38- 14M- 55	14M5538	6F	F81	38	170,34	166,60	184	120	—	70	85	24	10,80
		55- 14M- 55	14M5540	6F	F33	40	178,25	175,49	188	120	—	70	85	24	11,20
		44- 14M- 55	14M5544	6F	F61	44	196,08	193,28	212	120	—	70	85	24	12,50
ŻELIWO		48- 14M- 55	14M5548	10WF	F62	48	213,90	211,11	226	135	170	70	70	24	13,70
		56- 14M- 55	14M5556	10WF	F66	56	249,55	246,76	256	135	207	70	70	28	117,50
		64- 14M- 55	14M5564	10WF	F70	64	285,21	282,41	296	135	240	70	70	28	15,60
	BEZ BANDY	72- 14M- 55	14M5572	10A		72	320,86	318,06	—	135	278	70	70	28	16,90
		80- 14M- 55	14M5580	10A		80	356,51	353,71	—	135	314	70	70	28	20,00
		90- 14M- 55	14M5590	10A		90	401,07	398,28	—	135	358	70	70	28	22,60
		112- 14M- 55	14M5511	10A		112\	499,11	496,32	—	135	456	70	70	28	29,50
		144- 14M- 55	14M5514	10A		144	641,71	638,92	—	135	600	70	70	28	39,00
		168- 14M- 55	14M5516	10A		168	748,66	745,87	—	135	706	70	70	28	48,50
		192- 14M- 55	14M5519	10A		192	855,62	852,82	—	135	813	70	70	28	57,80
		216- 14M- 55	14M5521	10A		216	962,57	959,76	—	150	920	70	70	28	67,00

HTD® 14M-85

WŁAŚCIWOŚCI		SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	IŁOŚĆ ZĘBÓW	Dp	De	Df	Dm	Di	F	L	d	MASA Kg
STAL	Z BANDA	28- 14M- 85	14M8528	6F	F40	28	124,78	122,12	128	100	—	102	117	24	7,70
		29- 14M- 85	14M8529	6F	F43	29	129,23	126,57	138	100	—	102	117	24	8,40
		30- 14M- 85	14M8530	6F	F43	30	133,70	130,99	138	100	—	102	117	24	9,10
		32- 14M- 85	14M8532	6F	F49	32	142,60	139,88	154	100	—	102	117	24	10,50
		34- 14M- 85	14M8534	6F	F51	34	151,52	148,79	160	100	—	102	117	24	11,90
		36- 14M- 85	14M8536	6F	F52	36	160,43	157,68	168	100	—	102	117	32	13,20
		38- 14M- 85	14M8538	6F	F81	38	170,34	166,60	184	120	—	102	117	32	15,15
		85- 14M- 85	14M8540	6F	F33	40	178,25	175,49	188	135	—	102	117	32	17,10
		44- 14M- 85	14M8544	6F	F61	44	196,08	193,28	212	135	—	102	117	32	23,30
ŻELIWO		48- 14M- 85	14M8548	6F	F62	48	213,90	211,11	226	150	—	102	117	32	25,00
		56- 14M- 85	14M8556	10WF	F66	56	249,55	246,76	256	150	207	102	117	32	25,00
		64- 14M- 85	14M8564	10WF	F70	64	285,21	282,41	296	150	240	102	102	32	30,50
	BEZ BANDY	72- 14M- 85	14M8572	10A		72	320,86	318,06	—	150	278	102	102	32	28,80
		80- 14M- 85	14M8580	10A		80	356,51	353,71	—	150	314	102	102	32	30,10
		90- 14M- 85	14M8590	10A		90	401,07	398,28	—	150	358	102	102	32	33,00
		112- 14M- 85	14M8511	10A		112\	499,11	496,32	—	150	456	102	102	32	41,80
		144- 14M- 85	14M8514	10A		144	641,71	638,92	—	150	600	102	102	32	52,40
		168- 14M- 85	14M8516	10A		168	748,66	745,87	—	150	706	102	102	32	60,30
		192- 14M- 85	14M8519	10A		192	855,62	852,82	—	165	813	102	102	32	70,20
		216- 14M- 85	14M8521	10A		216	962,57	959,76	—	165	920	102	102	32	81,00

HTD® 14M-115

WŁAŚCIWOŚCI		SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	IŁOŚĆ ZĘBÓW	Dp	De	Df	Dm	Di	F	L	d	MASA Kg
STAL	Z BANDA	28- 14M- 115	14M1128	6F	F40	28	124,78	122,12	128	100	—	133	148	32	9,20
		29- 14M- 115	14M1129	6F	F43	29	129,23	126,57	138	100	—	133	148	32	10,20
		30- 14M- 115	14M1130	6F	F43	30	133,70	130,99	138	100	—	133	148	32	11,20
		32- 14M- 115	14M1132	6F	F49	32	142,60	139,88	154	100	—	133	148	32	13,20
		34- 14M- 115	14M1134	6F	F51	34	151,52	148,79	160	100	—	133	148	32	14,80
		36- 14M- 115	14M1136	6F	F52	36	160,43	157,68	168	100	—	133	148	32	16,60
		38- 14M- 115	14M1138	6F	F81	38	170,34	166,60	184	120	—	133	148	32	19,20
		40- 14M- 115	14M1140	6F	F33	40	178,25	175,49	188	135	—	133	148	32	20,56
		44- 14M- 115	14M1144	6F	F61	44	196,08	193,28	212	140	—	133	148	32	21,93
		48- 14M- 115	14M1148	6F	F62	48	213,90	211,11	226	150	—	133	148	32	25,00
		56- 14M- 115	14M1156	6F	F66	56	249,55	246,76	256	150	—	133	148	32	27,50
		64- 14M- 115	14M1164	10WF	F70	64	285,21	282,41	296	150	240	133	133	32	30,10
ŻELIWO	BEZ BANDY	72- 14M- 115	14M1172	10A		72	320,86	318,06	—	150	278	133	133	32	32,83
		80- 14M- 115	14M1180	10A		80	356,51	353,71	—	150	314	133	133	32	35,55
		90- 14M- 115	14M1190	10A		90	401,07	398,28	—	150	358	133	133	32	41,00
		112- 14M- 115	14M1111	10A		112\	499,11	496,32	—	150	456	133	133	32	54,40
		144- 14M- 115	14M1114	10A		144	641,71	638,92	—	165	600	133	133	32	67,80
		168- 14M- 115	14M1116	10A		168	748,66	745,87	—	165	706	133	133	32	75,80
		192- 14M- 115	14M1119	10A		192	855,62	852,82	—	165	813	133	133	32	88,30
		216- 14M- 115	14M1121	10A		216	962,57	959,76	—	165	920	133	133	32	98,00

HTD® 14M-170

WŁAŚCIWOŚCI		SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	IŁOŚĆ ZĘBÓW	Dp	De	Df	Dm	Di	F	L	d	MASA Kg
STAL	Z BANDA	28- 14M- 170	14M1728	6F	F40	28	124,78	122,12	128	100	—	133	148	32	9,20
		29- 14M- 170	14M1729	6F	F43	29	129,23	126,57	138	100	—	133	148	32	10,20
		30- 14M- 170	14M1730	6F	F43	30	133,70	130,99	138	100	—	133	148	32	11,20
		32- 14M- 170	14M1732	6F	F49	32	142,60	139,88	154	100	—	133	148	32	13,20
		34- 14M- 170	14M1734	6F	F51	34	151,52	148,79	160	100	—	133	148	32	14,80
		36- 14M- 170	14M1736	6F	F52	36	160,43	157,68	168	100	—	133	148	32	16,60
		38- 14M- 170	14M1738	6F	F81	38	170,34	166,60	184	120	—	133	148	32	19,20
		40- 14M- 170	14M1740	6F	F33	40	178,25	175,49	188	135	—	133	148	32	20,56
		44- 14M- 170	14M1744	6F	F61	44	196,08	193,28	212	140	—	133	148	32	21,93
		48- 14M- 170	14M1748	6F	F62	48	213,90	211,11	226	150	—	133	148	32	25,00
		56- 14M- 170	14M1756	6F	F66	56	249,55	246,76	256	150	—	133	148	32	27,50
		64- 14M- 170	14M1764	10WF	F70	64	285,21	282,41	296	150	240	133	133	32	30,10
ŻELIWO	BEZ BANDY	72- 14M- 170	14M1772	10A		72	320,86	318,06	—	150	278	133	133	32	32,83
		80- 14M- 170	14M1780	10A		80	356,51	353,71	—	150	314	133	133	32	35,55
		90- 14M- 170	14M1790	10A		90	401,07	398,28	—	150	358	133	133	32	41,00
		112- 14M- 170	14M1711	10A		112\	499,11	496,32	—	150	456	133	133	32	54,40
		144- 14M- 170	14M1714	10A		144	641,71	638,92	—	165	600	133	133	32	67,80
		168- 14M- 170	14M1716	10A		168	748,66	745,87	—	165	706	133	133	32	75,80
		192- 14M- 170	14M1719	10A		192	855,62	852,82	—	165	813	133	133	32	88,30
		216- 14M- 170	14M1721	10A		216	962,57	959,76	—	165	920	133	133	32	98,00

HTD® 20M-115

WŁAŚCI- WOŚCI		SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	IŁOŚĆ ZĘBÓW	Dp	De	Df	Dm	Di	F	L	e	d	MASA Kg
ŻELIWO	Z BANDA	34- 20M- 115	20M1134	6F	F64	34	216,45	212,13	240	165	—	136,5	168,5	—	32	39
		36- 20M- 115	20M1136	6F	F65	36	229,18	224,87	250	178	—	136,5	168,5	—	32	44
		38- 20M- 115	20M1138	6F	F67	38	241,92	237,60	265	181	—	136,5	168,5	—	32	49
		40- 20M- 115	20M1140	6F	F68	40	254,65	250,33	275	203	—	136,5	168,5	—	32	
		44- 20M- 115	20M1144	6F	F71	44	280,11	275,79	300	210	—	136,5	168,5	—	32	
		48- 20M- 115	20M1148	6F	F72	48	305,58	301,26	325	228	—	136,5	168,5	—	32	
		52- 20M- 115	20M1152	6F	F73	52	331,04	326,72	350	228	—	136,5	168,5	—	32	
		56- 20M- 115	20M1156	6F	F74	56	356,51	352,19	375	228	—	136,5	168,5	—	32	
		60- 20M- 115	20M1160	6WF	F75	60	381,97	377,65	405	228	318	136,5	168,5	—	38	
		64- 20M- 115	20M1164	6WF	F76	64	407,44	403,12	430	228	343	136,5	168,5	—	38	
		68- 20M- 115	20M1168	6WF	F77	68	432,90	428,58	455	228	366	136,5	168,5	—	38	
		72- 20M- 115	20M1172	6AF	F78	72	458,37	454,05	480	228	435	136,5	168,5	—	38	
		80- 20M- 115	20M1180	6AF	F79	80	509,30	504,98	530	280	445	136,5	168,5	—	38	
		90- 20M- 115	20M1190	6AF	F80	90	572,96	568,64	595	280	508	136,5	168,5	—	38	
	BEZ BANDY	112- 20M- 115	20M1111	6A		112	713,01	708,70	—	280	648	136,5	168,5	—	38	
		144- 20M- 115	20M1114	6A		144	916,73	912,41	—	300	852	136,5	168,5	—	44	
		168- 20M- 115	20M1116	6A		168	1069,52	1065,21	—	300	1005	136,5	168,5	—	44	
		192- 20M- 115	20M1119	6A		192	1222,31	1218,00	—	300	1158	136,5	168,5	—	48	
		216- 20M- 115	20M1121	6A		216	1375,10	1370,78	—	300	1300	136,5	168,5	—	48	

HTD® 20M-170

WŁAŚCI- WOŚCI		SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	IŁOŚĆ ZĘBÓW	Dp	De	Df	Dm	Di	F	L	e	d	MASA Kg
ŻELIWO	Z BANDA	34- 20M- 170	20M1734	6F	F64	34	216,45	212,13	240	165	—	190,5	222,5	—	32	44,8
		36- 20M- 170	20M1736	6F	F65	36	229,18	224,87	250	178	—	190,5	222,5	—	32	50,5
		38- 20M- 170	20M1738	6F	F67	38	241,92	237,60	265	181	—	190,5	222,5	—	32	55,0
		40- 20M- 170	20M1740	6F	F68	40	254,65	250,33	275	203	—	190,5	222,5	—	32	
		44- 20M- 170	20M1744	6F	F71	44	280,11	275,79	300	210	—	190,5	222,5	—	32	
		48- 20M- 170	20M1748	6F	F72	48	305,58	301,26	325	240	—	190,5	222,5	—	32	
		52- 20M- 170	20M1752	6F	F73	52	331,04	326,72	350	280	—	190,5	222,5	—	32	
		56- 20M- 170	20M1756	6F	F74	56	356,51	352,19	375	280	—	190,5	222,5	—	32	
		60- 20M- 170	20M1760	6F	F75	60	381,97	377,65	405	280	318	190,5	222,5	—	38	
		64- 20M- 170	20M1764	6F	F76	64	407,44	403,12	430	280	343	190,5	222,5	—	38	
		68- 20M- 170	20M1768	6F	F77	68	432,90	428,58	455	280	366	190,5	222,5	—	38	
		72- 20M- 170	20M1772	10AF	F78	72	458,37	454,05	480	280	435	190,5	190,5	—	38	
		80- 20M- 170	20M1780	10AF	F79	80	509,30	504,98	530	280	445	190,5	190,5	—	38	
		90- 20M- 170	20M1790	10AF	F80	90	572,96	568,64	595	280	508	190,5	190,5	—	38	
	BEZ BANDY	112- 20M- 170	20M1711	10A		112	713,01	708,70	—	300	648	190,5	190,5	—	38	
		144- 20M- 170	20M1714	10A		144	916,73	912,41	—	300	852	190,5	190,5	—	44	
		168- 20M- 170	20M1716	10A		168	1069,52	1065,21	—	350	1005	190,5	190,5	—	44	
		192- 20M- 170	20M1719	10A		192	1222,31	1218,00	—	350	1158	190,5	190,5	—	48	
		216- 20M- 170	20M1721	10A		216	1375,10	1370,78	—	350	1300	190,5	190,5	—	48	

HTD® 20M-230

WŁAŚCI- WOŚCI		SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	IŁOŚĆ ZĘBÓW	Dp	De	Df	Dm	Di	F	L	e	d	MASA Kg
ŻELIWO	Z BANDA	38- 20M- 230	20M2338	6F	F67	38	241,92	237,60	265	181	—	250,8	282,8	—	32	67,5
		40- 20M- 230	20M2340	6F	F68	40	254,65	250,33	275	203	—	250,8	282,8	—	32	
		44- 20M- 230	20M2344	6F	F71	44	280,11	275,79	300	210	—	250,8	282,8	—	32	
		48- 20M- 230	20M2348	6F	F72	48	305,58	301,26	325	228	—	250,8	282,8	—	32	
		52- 20M- 230	20M2352	6F	F73	52	331,04	326,72	350	228	—	250,8	282,8	—	32	
		56- 20M- 230	20M2356	6F	F74	56	356,51	352,19	375	228	—	250,8	282,8	—	32	
		60- 20M- 230	20M2360	6F	F75	60	381,97	377,65	405	228	318	250,8	282,8	—	38	
		64- 20M- 230	20M2364	6WF	F76	64	407,44	403,12	430	228	343	250,8	282,8	—	38	
		68- 20M- 230	20M2368	6WF	F77	68	432,90	428,58	455	228	366	250,8	282,8	—	38	
		72- 20M- 230	20M2372	6AF	F78	72	458,37	454,05	480	228	435	250,8	282,8	—	38	
		80- 20M- 230	20M2380	10WF	F79	80	509,30	504,98	530	280	445	250,8	250,8	—	38	
		90- 20M- 230	20M2390	10AF	F80	90	572,96	568,64	595	280	508	250,8	250,8	—	38	
	BEZ BANDY	112- 20M- 230	20M2311	10A		112	713,01	708,70	—	280	648	250,8	250,8	—	38	
		144- 20M- 230	20M2314	10A		144	916,73	912,41	—	300	852	250,8	250,8	—	44	
		168- 20M- 230	20M2316	10A		168	1069,52	1065,21	—	300	1005	250,8	250,8	—	44	
		192- 20M- 230	20M2319	10A		192	1222,31	1218,00	—	300	1158	250,8	250,8	—	48	
		216- 20M- 230	20M2321	10A		216	1375,10	1370,78	—	300	1300	250,8	250,8	—	48	

HTD® 20M-290


WŁAŚCI- WOŚCI		SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	IŁOŚĆ ZĘBÓW	Dp	De	Df	Dm	Di	F	L	e	d	MASA Kg
ŻELIWO	Z BANDA	52- 20M- 290	20M2952	6F	F73	52	331,04	326,72	350	280	—	311,2	343	—	32	
		56- 20M- 290	20M2956	6F	F74	56	356,51	352,19	375	280	—	311,2	343	—	32	
		60- 20M- 290	20M2960	6F	F75	60	381,97	377,65	405	300	—	311,2	343	—	38	
		64- 20M- 290	20M2964	6F	F76	64	407,44	403,12	430	300	—	311,2	343	—	38	
		68- 20M- 290	20M2968	6F	F77	68	432,90	428,58	455	300	—	311,2	343	—	38	
		72- 20M- 290	20M2972	6F	F78	72	458,37	454,05	480	300	—	311,2	343	—	44	
		80- 20M- 290	20M2980	6F	F79	80	509,30	504,98	530	300	—	311,2	343	—	44	
		90- 20M- 290	20M2990	10WF	F80	90	572,96	568,64	595	300	508	311,2	311,2	—	44	
	BEZ BANDY	112- 20M- 290	20M2911	10A		112	713,01	708,70	—	350	648	311,2	311,2	—	48	
		144- 20M- 290	20M2914	10A		144	916,73	912,41	—	350	852	311,2	311,2	—	48	
		168- 20M- 290	20M2916	10A		168	1069,52	1065,21	—	400	1005	311,2	311,2	—	48	
		192- 20M- 290	20M2919	10A		192	1222,31	1218,00	—	400	1158	311,2	311,2	—	48	
		216- 20M- 290	20M2921	10A		216	1375,10	1370,78	—	400	1300	311,2	311,2	—	48	

HTD® 20M-340


WŁAŚCI- WOŚCI		SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	IŁOŚĆ ZĘBÓW	Dp	De	Df	Dm	Di	F	L	e	d	MASA Kg
ŻELIWO	Z BANDA	52- 20M- 340	20M3452	6F	F73	52	331,04	326,72	350	280	—	362	394	—	38	
		56- 20M- 340	20M3456	6F	F74	56	356,51	352,19	375	280	—	362	394	—	38	
		60- 20M- 340	20M3460	6F	F75	60	381,97	377,65	405	300	—	362	394	—	38	
		64- 20M- 340	20M3464	6F	F76	64	407,44	403,12	430	300	—	362	394	—	44	
		68- 20M- 340	20M3468	6F	F77	68	432,90	428,58	455	300	—	362	394	—	44	
		72- 20M- 340	20M3472	6F	F78	72	458,37	454,05	480	300	—	362	394	—	44	
		80- 20M- 340	20M3480	6F	F79	80	509,30	504,98	530	300	—	362	394	—	44	
		90- 20M- 340	20M3490	10WF	F80	90	572,96	568,64	595	300	508	362	394	—	48	
	BEZ BANDY	112- 20M- 340	20M3411	10A		112	713,01	708,70	—	350	648	362	362	—	48	
		144- 20M- 340	20M3414	10A		144	916,73	912,41	—	350	852	362	362	—	48	
		168- 20M- 340	20M3416	10A		168	1069,52	1065,21	—	400	1005	362	362	—	48	
		192- 20M- 340	20M3419	10A		192	1222,31	1218,00	—	400	1158	362	362	—	48	
		216- 20M- 340	20M3421	10A		216	1375,10	1370,78	—	400	1300	362	362	—	48	

Koła pasowe HTD® do pasków zębatych pod tuleję zaciskową




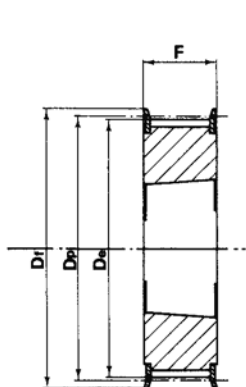


TYP 3F

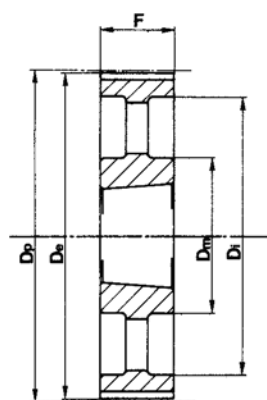


TYP 3A

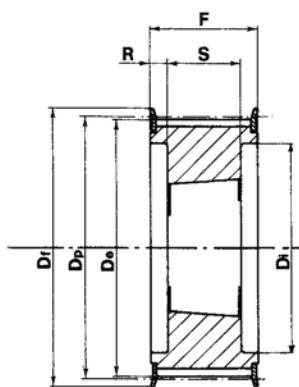


TYP 4F

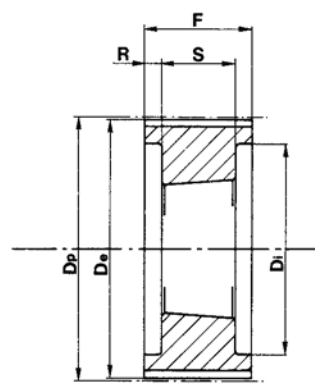


TYP 4

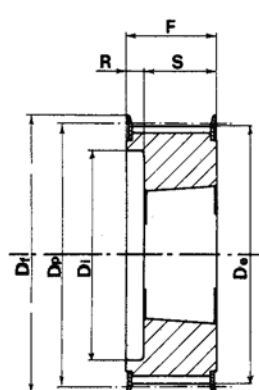


TYP 5F

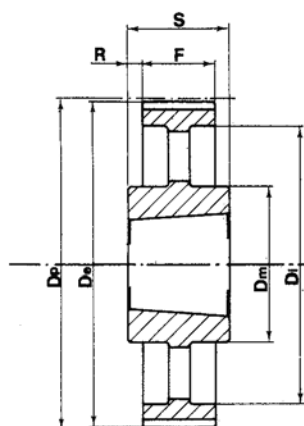


TYP 7A

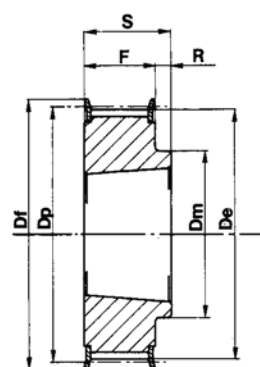


TYP 8F

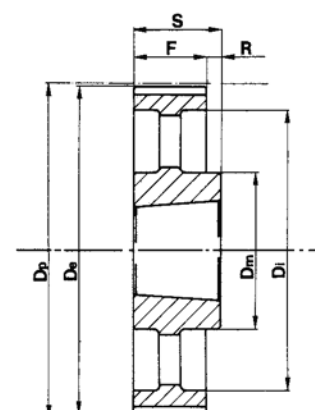


TYP 8A

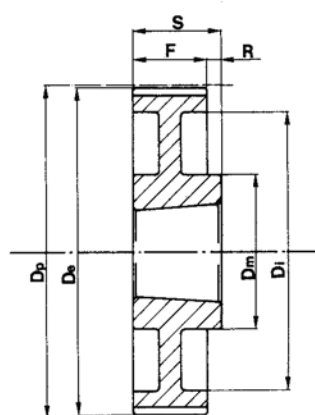


TYP 8W

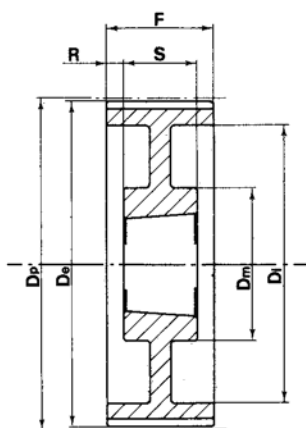

TYP 9W

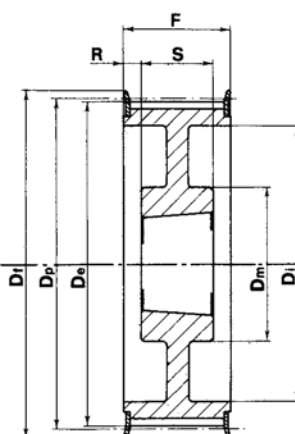

TYP 9WF

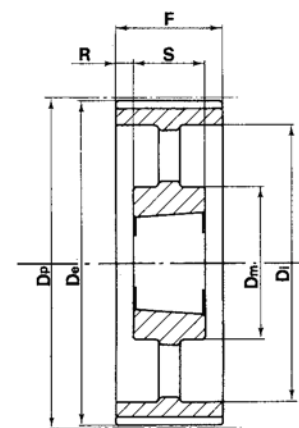

TYP 9A

HTD® 5M-15

WŁAŚCI- WOŚCI	SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	TULEJA	MAX. BORE	Dp	De	Df	Dm	Di	F	S	R	MASA Kg
ŻELIWO	Z BANDA	34-5M-15	0515034	3F	F21	1008	25	54,11	52,97	57	-	-	22	22	-
		36-5M-15	0515036	3F	F22	1108	25	57,63	56,15	60	-	-	22	22	-
		38-5M-15	0515038	3F	F25	1108	25	60,48	59,34	66	-	-	22	22	-
		40-5M-15	0515040	3F	F26	1108	25	63,66	62,52	70	-	-	22	22	-
		44-5M-15	0515044	3F	F27	1210	25	70,03	68,89	75	-	-	22	22	-
		48-5M-15	0515048	8F	F29	1210	32	76,39	75,25	83	59	-	22	25	3
		56-5M-15	0515056	8F	F32	1210	32	89,13	87,98	93	70	-	22	25	3
		64-5M-15	0515064	8F	F35	1210	32	101,86	100,72	106	80	-	22	25	3
	BEZ BANDY	72-5M-15	0515072	8A	-	1610	42	1117,59	113,45	-	92	-	22	25	3
		80-5M-15	0515080	8A	-	1610	42	127,32	126,18	-	92	-	22	25	3
		90-5M-15	0515090	8A	-	1610	42	143,24	142,10	-	92	-	22	25	3
		112-5M-15	0515112	8A	-	2012	50	178,25	177,11	-	110	-	20	32	12
		136-5M-15	0515136	7A	-	2012	50	216,45	215,31	-	110	199	20	32	6

HTD® 8M-20

WŁAŚCI- WOŚCI		SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	TULEJA	MAX. BORE	Dp	De	Df	Dm	Di	F	S	R	MASA Kg
STAL	Z BANDA	22-8M-20	0820022	5F	F22	1108	25	56,02	54,65	60	-	37	28	22	6	0,25
		24-8M-20	0820024	5F	F25	1108	25	61,12	59,75	66	-	44	28	22	6	0,30
		26-8M-20	0820026	5F	F26	1108	25	66,21	64,84	70	-	45	28	22	6	0,36
		28-8M-20	0820028	5F	F27	1108	25	71,30	70,08	75	-	50	28	22	6	0,44
		30-8M-20	0820030	5F	F29	1108	25	76,39	75,13	83	-	58	28	22	6	0,53
		32-8M-20	0820032	5F	F30	1610	42	81,49	80,16	87	-	63	28	25	3	0,42
		34-8M-20	0820034	5F	F31	1610	42	86,58	85,22	91	-	64	28	25	3	0,55
		36-8M-20	0820036	5F	F33	1610	42	91,67	90,30	97	-	68	28	25	3	0,68
		38-8M-20	0820038	5F	F34	1610	42	96,77	95,39	102	-	72	28	25	3	0,80
		40-8M-20	0820040	5F	F35	1610	42	101,86	100,49	106	-	76	28	25	3	1,00
		44-8M-20	0820044	8F	F38	2012	50	112,02	110,67	120	93	-	28	32	4	1,20
		48-8M-20	0820048	8F	F40	2012	50	122,23	120,86	128	96	-	28	32	4	1,60
		56-8M-20	0820056	8F	F48	2012	50	142,60	141,23	150	110	-	28	32	4	2,40
		64-8M-20	0820064	9WF	F52	2012	50	162,97	161,60	168	110	137	28	32	4	2,70
		72-8M-20	0820072	9WF	F57	2012	50	183,35	181,97	192	110	158	28	32	4	3,30
ŻELIWO	BEZ BANDY	80-8M-20	0820080	8W		2012	50	203,72	202,35	-	110	180	28	32	4	3,50
		90-8M-20	0820090	8A		2012	50	229,18	227,81	-	110	204	28	32	4	3,65
		144-8M-20	0820144	8A		2517	60	366,69	365,32	-	125	336	28	32	4	4,80

HTD® 8M-30


WŁAŚCI- WOŚCI		SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	TULEJA	MAX. BORE	Dp	De	Df	Dm	Di	F	S	R	MASA Kg
STAL	Z BANDA	22-8M-30	0830022	5F	F22	1108	25	56,02	54,65	60	-	37	38	22	16	0,25 0,30 0,36 0,44 0,53
		24-8M-30	0830024	5F	F25	1108	25	61,12	59,75	66	-	44	38	22	16	
		26-8M-30	0830026	5F	F26	1108	25	66,21	64,84	70	-	44	38	22	16	
		28-8M-30	0830028	5F	F27	1210	32	71,30	70,08	75	-	50	38	22	13	
		30-8M-30	0830030	5F	F29	1615	42	76,39	75,13	83	-	-	38	38	-	
		32-8M-30	0830032	5F	F30	1615	42	81,49	80,16	87	-	-	38	38	-	0,42 0,55 0,68 0,80
		34-8M-30	0830034	5F	F31	1615	42	86,58	85,22	91	-	-	38	38	-	
		36-8M-30	0830036	5F	F33	1615	42	91,67	90,30	97	-	-	38	38	-	
		38-8M-30	0830038	5F	F34	1615	42	96,77	95,39	102	-	-	38	38	-	
		40-8M-30	0830040	5F	F35	1615	42	101,86	100,49	106	-	-	38	38	-	
		44-8M-30	0830044	8F	F38	2012	50	112,02	110,67	120	-	86	38	32	3	
		48-8M-30	0830048	8F	F40	2012	50	122,23	120,86	128	-	90	38	32	3	
		56-8M-30	0830056	8F	F48	2012	50	142,60	141,23	150	-	110	38	32	3	
					F52					168						
		64-8M-30	0830064	9WF	F57	2517	60	162,97	161,60	192	125	-	38	45	7	2,70 3,30
72-8M-30	0830072	9WF		2517	60	183,35	181,97	-	125	158	38	45	7			
ŻELIWO	BEZ BANDY	80-8M-30	0830080	8W		2517	60	203,72	202,35	-	125	180	38	45	7	4,60
		90-8M-30	0830090	8A		2517	60	229,18	227,81	-	125	204	38	45	7	5,00
		112-8M-30	0830090	8A		2517	60	285,21	283,83	-	125	254	38	45	7	6,20
		144-8M-30	0830144	8A		2517	60	366,69	365,32	-	125	336	38	45	7	9,00

HTD® 8M-50

WŁAŚCI- WOŚCI		SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	TULEJA	MAX. BORE	Dp	De	Df	Dm	Di	F	S	R	MASA Kg		
STAL	Z BANDA	28-8M-50	0850028	4F	F27	1210	32	71,30	70,08	75		50	60	25	17,5	0,60		
		30-8M-50	0850030	5F	F29	1615	42	76,39	75,13	83		58	60	38	22	0,65		
		32-8M-50	0850032	5F	F30	1615	42	81,49	80,16	87	-	62	60	38	22	0,82		
		34-8M-50	0850034	5F	F30	1615	42	86,58	85,22	91	-	65	60	38	22	1,06		
											-							
		36-8M-50	0850036	5F	F33	1615	42	91,67	90,30	97	-	68	60	38	22	1,30		
		38-8M-50	0850038	5F	F34	1615	42	96,77	95,39	102		72	60	38	22	1,60		
		40-8M-50	0850040	4F	F35	2012	50	101,86	100,49	106	-	82	60	32	14	1,71		
		44-8M-50	0850044	4F	F38	2012	50	112,05	110,67	120	-	91	60	32	14	1,78		
											-							
		48-8M-50	0850048	4F	F40	2012	50	122,23	120,86	128	-	95	60	32	14	2,30		
		56-8M-50	0850056	4F	F48	2517	60	142,60	141,23	150		116	60	45	7,5	3,40		
64-8M-50	0850064	4F	F52	2517	60	162,97	161,60	168	-	137	60	45	7,5	5,00				
72-8M-50	0850072	9WF	F57	2517	60	183,35	181,97	192			158	60	45	7,5	6,70			
ŻELIWO	BEZ BANDY	80-8M-50	0850080	4		3020	75	203,72	202,35	-	-	180	60	51	17,5	8,80		
		90-8M-50	0850090	9W		3020	75	229,18	227,81	-	170	204	60	51	17,5	10,00		
		112-8M-50	0850112	9W		3020	75	285,21	283,83	-	170	260	60	51	17,5	12,00		
		144-8M-50	0850144	9A		3020	75	366,69	365,32	-	198	341	60	51	17,5	15,20		
		168-8M-50	0850168	7A		3525	90	427,87	426,44	-	198	402	60	65	2,5	17,50		
		192-8M-50	0850192	7A		3525	90	488,92	487,55	-	198	460	60	65	2,5	24,00		

HTD® 8M-85

WŁAŚCI- WOŚCI		SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	TULEJA	MAX. BORE	Dp	De	Df	Dm	Di	F	S	R	MASA Kg
STAL	Z BANDA	34-8M-85	0885034	4F	F31	1615	42	86,58	85,22	91	-	65	95	38	28,5	1,43
		36-8M-85	0885036	4F	F33	1615	42	91,67	90,30	97	-	68	95	38	28,5	1,87
		38-8M-85	0885038	4F	F34	1615	42	96,77	95,39	102	-	72	95	38	28,5	2,20
		40-8M-85	0885040	4F	F35	2012	50	101,86	100,49	106	-	82	95	32	31,5	1,80
		44-8M-85	0885044	4F	38	2012	50	112,05	110,67	120	-	91	95	32	31,5	2,30
		48-8M-85	0885048	4F	F40	2517	60	122,25	120,86	128	-	100	95	45	25	2,66
		56-8M-85	0885056	4F	F48	2517	60	142,60	141,23	150	-	117	95	45	25	4,45
		64-8M-85	0885064	4F	F52	2517	60	162,97	161,60	168	-	137	95	45	25	6,20
		72-8M-85	0885072	4F	F57	3020	75	183,35	181,97	192	-	158	95	51	22	8,00
		80-8M-85	0885080	4F	F57	3020	75	183,35	181,97	192	-	158	95	51	22	8,00
ŻELIWO	BEZ BANDY	80-8M-85	0885080	4		3020	75	203,72	202,35	-	-	180	95	51	22	10,00
		90-8M-85	0885090	9W		3020	75	229,18	227,81	-	170	204	95	51	22	10,80
		112-8M-85	0885112	9W		3020	75	285,21	283,83	-	170	260	95	51	22	15,00
		144-8M-85	0885144	9A		3525	90	366,69	365,32	-	198	336	95	65	15	20,00
		168-8M-85	0885168	9A		3525	90	427,87	426,44	-	198	395	95	65	15	22,00
		192-8M-85	0885192	9A		3525	90	488,92	487,55	-	198	455	95	65	15	26,00

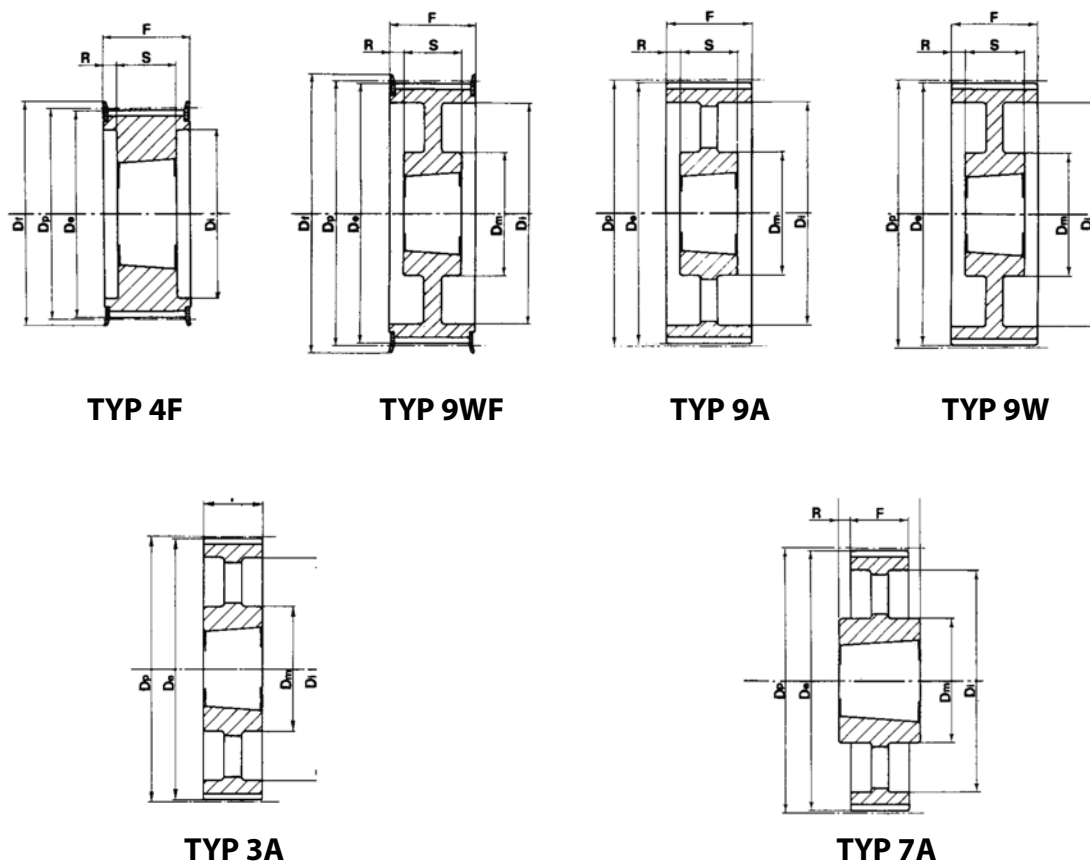

HTD® 14M-40

WŁAŚCI- WOŚCI	SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	TULEJA	MAX. BORE	Dp	De	Df	Dm	Di	F	S	R	MASA Kg
STAL	Z BANDA	28-14M-40	4F	F40	2012	50	124,78	122,12	128	-	94	54	32	11	2,07
		29-14M-40	4F	F43	2012	50	129,23	126,57	138	-	98	54	32	11	2,38
		30-14M-40	4F	F43	2012	50	133,69	130,99	138	-	98	54	32	11	2,65
		32-14M-40	4F	F49	2012	50	142,60	139,88	154	-	108	54	32	11	3,40
		34-14M-40	4F	F51	2517	60	151,52	148,79	160	-	110	54	45	17,5	3,87
		36-14M-40	4F	F52	2517	60	160,43	157,68	168	-	120	54	45	17,5	4,80
		38-14M-40	4F	F81	2517	60	169,34	166,60	184	-	130	54	45	17,5	5,40
		40-14M-40	4F	F56	2517	60	178,25	175,49	188	-	138	54	45	17,5	6,00
		44-14M-40	4F	F61	3020	75	196,08	193,28	212	-	155	54	51	1,5	7,80
		48-14M-40	4F	F62	3020	75	213,90	211,11	226	-	170	54	51	1,5	9,40
ŻELIWO	BEZ BANDY	56-14M-40	9WF	F66	3020	75	249,55	248,76	256	170	208	54	51	1,5	10,80
		64-14M-40	9WF	F70	3020	75	285,21	282,41	296	170	240	54	51	1,5	13,40
		72-14M-40	9W		3020	75	320,86	318,06	-	170	280	54	51	1,5	15,20
		80-14M-40	9A		3020	75	356,51	353,71	-	170	315	54	51	1,5	16,00
		90-14M-40	9A		3020	75	401,07	398,28	-	170	360	54	51	1,5	17,80
		112-14M-40	9A		3020	75	499,11	496,32	-	170	457	54	51	1,5	25,60
		144-14M-40	9A		3020	75	641,71	638,92	-	170	600	54	51	1,5	32,00
		168-14M-40	9A		3020	75	748,66	745,87	-	170	706	54	51	1,5	44,00
		192-14M-40	9A		3020	75	855,62	852,82	-	170	813	54	51	1,5	49,00
		216-14M-40	9A		3020	75	962,57	959,76	-	170	920	54	51	1,5	55,00

HTD® 14M-55

WŁAŚCI- WOŚCI		SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	TULEJA	MAX. BORE	Dp	De	Df	Dm	Di	F	S	R	MASA Kg
STAL	Z BANDA	28-14M-55	1455028	4F	F40	2012	50	124,78	122,12	128	-	94	70	32	19	2,20
		29-14M-55	1455029	4F	F43	2012	50	129,23	126,57	138	-	100	70	32	19	2,74
		30-14M-55	1455030	4F	F43	2012	60	133,69	130,99	138	-	100	70	45	12,5	2,70
		32-14M-55	1455032	4F	F49	2012	60	142,60	139,88	154	-	108	70	45	12,5	3,66
		34-14M-55	1455034	4F	F51	2517	60	151,52	148,79	160	-	110	70	45	12,5	17,55
		36-14M-55	1455036	4F	F52	2517	60	160,43	157,68	168	-	120	70	45	12,5	5,20
		38-14M-55	1455038	4F	F81	2517	60	169,34	166,60	184	-	130	70	45	12,5	6,20
		40-14M-55	1455040	4F	F56	2517	60	178,25	175,49	188	-	138	70	45	12,5	7,00
		44-14M-55	1455044	4F	F61	3020	75	196,08	193,28	212	-	155	70	51	9,5	8,60
		48-14M-55	1455048	4F	F62	3020	75	213,90	211,11	226	-	170	70	51	9,5	10,40
56-14M-55	1455056	9WF	F66	3020	75	249,55	248,76	256	170	208	70	51	9,5	12,40		
ŻELIWO	BEZ BANDY	64-14M-55	1455064	9WF	F70	3020	75	285,21	282,41	296	170	240	70	51	9,5	117,50
		72-14M-55	1455072	9W		3020	75	320,86	318,06	-	170	280	70	51	9,5	16,20
		80-14M-55	1455080	9A		3020	75	356,51	353,71	-	170	315	70	51	9,5	17,50
		90-14M-55	1455090	9A		3020	75	401,07	398,28	-	170	360	70	51	9,5	20,10
		112-14M-55	1455112	9A		3020	75	499,11	496,32	-	170	457	70	51	9,5	28,40
		144-14M-55	1455144	9A		3020	75	641,71	638,92	-	170	600	70	51	9,5	36,20
		168-14M-55	1455168	9A		3020	75	748,66	745,87	-	170	706	70	51	9,5	49,00
		192-14M-55	1455192	9A		3020	75	855,62	852,82	-	170	813	70	51	9,5	53,00
		216-14M-55	1455216	7A		3535	90	962,57	959,76	-	190	920	70	89	9,5	65,80

HTD® 14M-85

WŁAŚCI- WOŚCI		SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	TULEJA	MAX. BORE	Dp	De	Df	Dm	Di	F	S	R	MASA Kg
STAL	Z BANDA	28-14M-85	1485028	4F	F40	2517	60	124,78	122,12	128	-	98	102	45	28,5	2,70
		29-14M-85	1485029	4F	F43	2517	60	129,23	126,57	138	-	100	102	45	28,5	3,40
		30-14M-85	1485030	4F	F43	2517	60	133,69	130,99	138	-	100	102	45	28,5	3,75
		32-14M-85	1485032	4F	F49	2517	60	142,60	139,88	154	-	108	102	45	28,5	4,80
		34-14M-85	1485034	4F	F51	2517	60	151,52	148,79	160	-	110	102	45	28,5	6,00
		36-14M-85	1485036	4F	F52	3020	75	160,43	157,68	168	-	120	102	51	25,5	5,80
		38-14M-85	1485038	4F	F81	3020	75	169,34	166,60	184	-	130	102	51	25,5	6,80
		40-14M-85	1485040	4F	F56	3020	75	178,25	175,49	188	-	138	102	51	25,5	8,00
		44-14M-85	1485044	4F	F61	3020	75	196,08	193,28	212	-	153	102	51	25,5	11,80
		48-14M-85	1485048	4F	F62	3020	75	213,90	211,11	226	-	170	102	51	25,5	15,10
		56-14M-85	1485056	9WF	F66	3525	90	249,55	248,76	256	-	2101	102	65	18,5	19,00
		64-14M-85	1485064	9WF	F70	3525	90	285,21	282,41	296	190	240	102	65	18,5	23,00
ŻELIWO	BEZ BANDY	72-14M-85	1485072	9W		3525	90	320,86	318,06	-	190	280	102	65	18,5	25,00
		80-14M-85	1485080	9A		3525	90	356,51	353,71	-	190	315	102	65	18,5	26,00
		90-14M-85	1485090	9A		3525	90	401,07	398,28	-	190	360	102	65	18,5	27,80
		112-14M-85	1485112	9A		3525	90	499,11	496,32	-	190	457	102	65	18,5	36,50
		144-14M-85	1485144	9A		3525	90	641,71	638,92	-	190	600	102	65	18,5	48,00
		168-14M-85	1485168	9A		3525	90	748,66	745,87	-	190	706	102	65	18,5	60,00
		192-14M-85	1485192	3A		4040	100	855,62	852,82	-	190	813	102	102	-	86,00
		216-14M-85	1485216	3A		4040	100	962,57	959,76	-	190	920	102	102	-	91,50

HTD® 14M-115

WŁAŚCI- WOŚCI		SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	TULEJA	MAX. BORE	Dp	De	Df	Dm	Di	F	S	R	MASA Kg
STAL	Z BANDA	28-14M-115	1411028	4F	F40	2517	60	124,78	122,12	128	-	98	133	45	44	3,77
		29-14M-115	1411029	4F	F43	2517	60	129,23	126,57	138	-	100	133	45	44	4,00
		30-14M-115	1411030	4F	F43	2517	60	133,69	130,99	138	-	100	133	45	44	5,00
		32-14M-115	1411032	4F	F49	2517	60	142,60	139,88	154	-	108	133	45	44	6,80
		34-14M-115	1411034	4F	F51	2517	60	151,52	148,79	160	-	110	133	45	44	6,80
		36-14M-115	1411036	4F	F52	3020	75	160,43	157,68	168	-	125	133	51	41	7,00
		38-14M-115	1411038	4F	F81	3020	75	169,34	166,60	184	-	130	133	51	41	8,40
		40-14M-115	1411040	4F	F56	3020	75	178,25	175,49	188	-	138	133	51	41	9,20
		44-14M-115	1411044	4F	F61	3030	75	196,08	193,28	212	-	155	133	76	28,5	14,00
		48-14M-115	1411048	4F	F62	3030	75	213,90	211,11	226	-	170	133	76	28,5	17,10
		56-14M-115	1411056	4F	F66	3535	90	249,55	248,76	256	190	208	133	89	22	24,80
ŻELIWO	BEZ BANDY	64-14M-115	1411064	9WF	F70	3535	90	285,21	282,41	296	190	240	133	89	22	27,00
		72-14M-115	1411072	9W		3535	90	320,86	318,06	-	190	280	133	89	22	29,00
		80-14M-115	1411080	9A		3535	90	356,51	353,71	-	190	315	133	89	22	32,00
		90-14M-115	1411090	9A		3535	90	401,07	398,28	-	190	360	133	89	22	36,50
		112-14M-115	1411112	9A		3535	90	499,11	496,32	-	190	457	133	89	22	46,00
		144-14M-115	1411144	9A		4040	100	641,71	638,92	-	230	600	133	102	15,5	68,00
		168-14M-115	1411168	9A		4040	100	748,66	745,87	-	230	706	133	102	15,5	82,60
		192-14M-115	1411192	9A		4040	100	855,62	852,82	-	230	813	133	102	15,5	96,00
		216-14M-115	1411216	9A		4040	100	962,57	959,76	-	230	920	133	102	15,5	107,00

HTD® 14M-170

WŁAŚCI- WOŚCI		SYMBOL KODU	NASZ KOD	TYP	TYP BANDY	TULEJA	MAX. BORE	Dp	De	Df	Dm	Di	F	S	R	MASA Kg
STAL	Z BANDA	38-14M-170	1417038	4F	F81	3030	75	169,34	166,60	184	-	130	187	76	55,5	11,70
		40-14M-170	1417040	4F	F56	3030	75	178,25	175,49	188	-	138	187	76	55,5	13,00
		44-14M-170	1417044	4F	F61	3535	90	196,08	193,28	212	-	153	187	89	49	15,00
		48-14M-170	1417048	4F	F62	3535	90	213,90	211,11	226	-	170	187	89	49	19,00
		56-14M-170	1417056	4F	F66	3535	90	249,55	248,76	256	-	208	187	89	49	28,50
ŻELIWO	BEZ BANDY	64-14M-170	1417064	4F	F70	4040	100	285,21	282,41	296	-	240	187	102	42,5	41,00
		72-14M-170	1417072	9W		4040	100	320,86	318,06	-	230	280	187	102	42,5	46,90
		80-14M-170	1417080	9W		4040	100	356,51	353,71	-	230	315	187	102	42,5	48,00
		90-14M-170	1417090	9A		4040	100	401,07	398,28	-	230	360	187	102	42,5	52,50
		112-14M-170	1417112	9A		5050	125	499,11	496,32	-	265	457	187	127	30	717,50
		144-14M-170	1417144	9A		5050	125	641,71	638,92	-	265	600	187	127	30	91,00
		168-14M-170	1417168	9A		5050	125	748,66	745,87	-	265	706	187	127	30	116,00
		192-14M-170	1417192	9A		5050	125	855,62	852,82	-	265	813	187	127	30	134,00
		216-14M-170	1417216	9A		5050	125	962,57	959,76	-	265	920	187	127	30	148,50

Koła pasowe do pasów klinowych pod tuleje zaciskowe







1

4

7


9

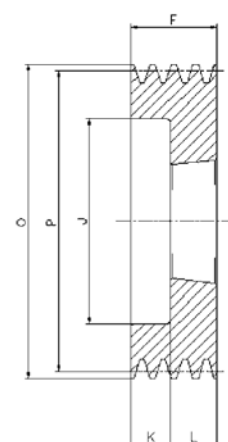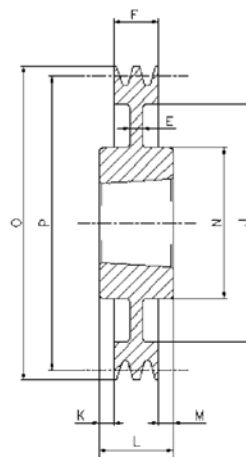

SPZ/1


Kod Zamówienia	Typ	Ilość Pasów	P	O	Form	TULEJA	Ø MAX	E	F	J	K	L	M	N
ZT00501	SPZ 50-01	1	50	54	9	1008	25	-	37	26	12	25	-	-
ZT00561	SPZ 56-01	1	56	60	9	1008	25	-	37	32	12	25	-	-
ZT00601	SPZ 60-01	1	60	64	1	1008	25	-	37	-	-	22	-	-
ZT00631	SPZ 63-01	1	63	67	1	1108	28	-	22	-	-	22	6	56
ZT00671	SPZ 67-01	1	67	71	1	1108	28	-	16	-	-	22	6	60
ZT00711	SPZ 71-01	1	71	75	1	1108	28	-	16	-	-	22	6	60
ZT00751	SPZ 75-01	1	75	79	1	1108	28	-	16	-	-	22	6	60
ZT00801	SPZ 80-01	1	80	84	1	1210	32	-	16	-	-	25	9	75
ZT00851	SPZ 85-01	1	85	89	1	1210	32	-	16	-	-	25	9	80
ZT00901	SPZ 90-01	1	90	94	1	1210	32	-	16	-	-	25	9	80
ZT00951	SPZ 95-01	1	95	99	1	1210	32	-	16	-	-	25	9	85
ZT01001	SPZ 100-01	1	100	104	1	1210	32	-	16	-	-	25	9	85
ZT01061	SPZ 106-01	1	106	110	1	1610	42	-	16	-	-	25	9	92
ZT01121	SPZ 112-01	1	112	116	1	1610	42	-	16	-	-	25	9	92
ZT01181	SPZ 118-01	1	118	122	1	1610	42	-	16	-	-	25	9	92
ZT01251	SPZ 125-01	1	125	129	1	1610	42	-	16	-	-	25	9	92
ZT01321	SPZ 132-01	1	132	136	1	1610	42	-	16	-	-	25	9	92
ZT01401	SPZ 140-01	1	140	144	1	1610	42	-	16	-	-	25	9	92
ZT01501	SPZ 150-01	1	150	154	1	1610	42	-	16	-	-	25	9	92
ZT01601	SPZ 160-01	1	160	164	1	1610	42	-	16	-	-	25	9	92
ZT01701	SPZ 170-01	1	170	174	1	1610	42	-	16	-	-	25	9	92
ZT01801	SPZ 180-01	1	180	184	7	1610	42	6	16	152	-	25	9	92
ZT01901	SPZ 190-01	1	190	194	7	1610	42	12	16	162	-	25	9	92
ZT02001	SPZ 200-01	1	200	204	7	2012	50	10	16	171	-	32	16	112
ZT02241	SPZ 224-01	1	224	228	7	2012	50	15	16	195	-	32	16	112
ZT02501	SPZ 250-01	1	250	254	4	2012	50	-	16	221	8	32	8	112
ZT02801	SPZ 280-01	1	280	284	4	2012	50	-	16	251	8	32	8	112
ZT03151	SPZ 315-01	1	315	319	4	2012	50	-	16	286	8	32	8	112
ZT03351	SPZ 355-01	1	355	359	4	2012	50	-	16	326	8	32	8	112
ZT04001	SPZ 400-01	1	400	404	4	2012	50	-	16	371	8	32	8	112
ZT04501	SPZ 450-01	1	450	454	4	2517	60	-	16	421	117,5	45	117,5	124

Stal

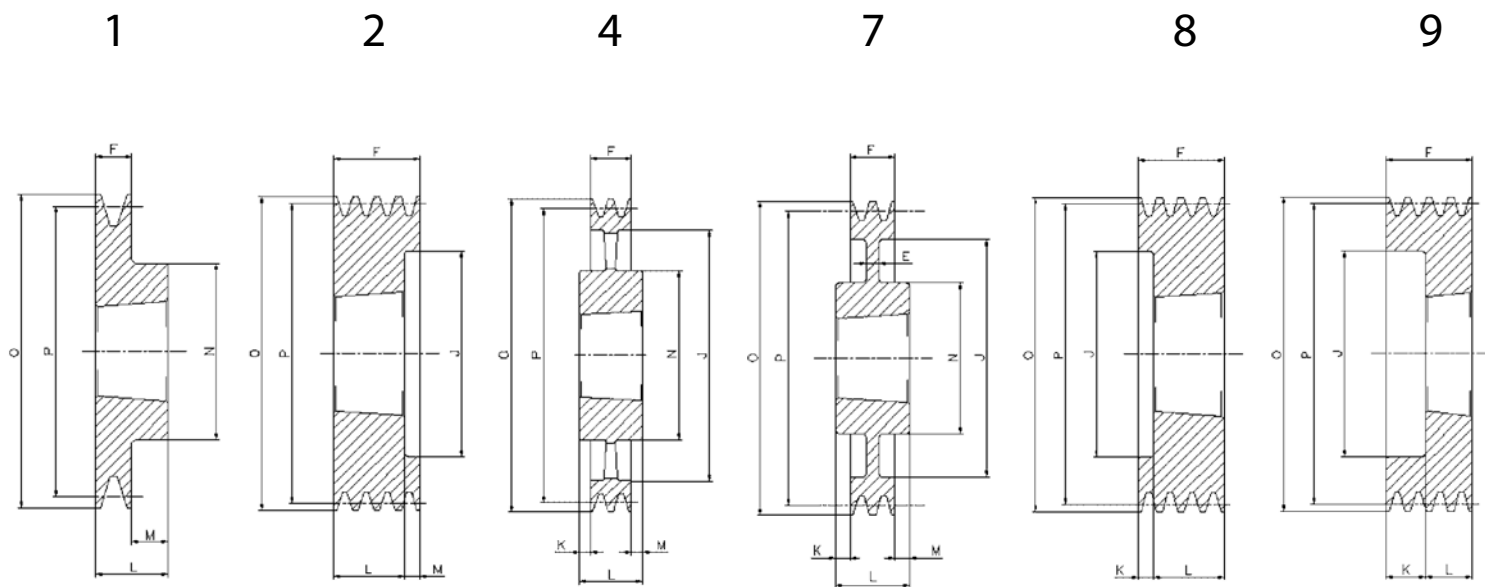


SPZ/2

Kod Zamówienia	Typ	Ilość Pasów	P	O	Form	TULEJA	Ø MAX	E	F	J	K	L	M	N
ZT00502	SPZ 50-02	2	50	54	9	1008	25	-	50	26	25	25	-	-
ZT00562	SPZ 56-02	2	56	60	9	1008	25	-	49	32	27	22	-	-
ZT00602	SPZ 60-02	2	60	64	9	1008	25	-	49	36	27	22	-	-
ZT00632	SPZ 63-02	2	63	67	8	1108	28	-	28	40	6	22	-	-
ZT00672	SPZ 67-02	2	67	71	8	1108	28	-	28	42	6	22	-	-
ZT00712	SPZ 71-02	2	71	75	8	1108	28	-	28	42	6	22	-	-
ZT00752	SPZ 75-02	2	75	79	8	1108	28	-	28	51	3	25	-	-
ZT00802	SPZ 80-02	2	80	84	8	1210	32	-	28	51	3	25	-	-
ZT00852	SPZ 85-02	2	85	89	8	1210	32	-	28	60	3	25	-	-
ZT00902	SPZ 90-02	2	90	94	8	1210	32	-	28	61	3	25	-	-
ZT00952	SPZ 95-02	2	95	99	8	1210	32	-	28	66	3	25	-	-
ZT01002	SPZ 100-02	2	100	104	8	1210	32	-	28	71	3	25	-	-
ZT01062	SPZ 106-02	2	106	110	8	1610	42	-	28	76	3	25	-	-
ZT01122	SPZ 112-02	2	112	116	8	1610	42	-	28	83	3	25	-	-
ZT01182	SPZ 118-02	2	118	122	8	1610	42	-	28	90	3	25	-	-
ZT01252	SPZ 125-02	2	125	129	8	1610	42	-	28	96	3	25	-	-
ZT01322	SPZ 132-02	2	132	136	8	1610	42	-	28	103	3	25	-	-
ZT01402	SPZ 140-02	2	140	144	1	1610	42	-	28	111	3	25	-	-
ZT01502	SPZ 150-02	2	150	154	1	1610	42	-	28	-	-	32	4	112
ZT01602	SPZ 160-02	2	160	164	1	1610	42	-	28	-	-	32	4	112
ZT01702	SPZ 170-02	2	170	174	1	1610	42	-	28	-	-	32	4	112
ZT01802	SPZ 180-02	2	180	184	7	1610	42	6	28	152	-	32	4	112
ZT01902	SPZ 190-02	2	190	194	7	1610	42	12	28	162	-	32	4	112
ZT02002	SPZ 200-02	2	200	204	7	2012	50	10	28	171	-	32	4	112
ZT02242	SPZ 224-02	2	224	228	4	2012	50	15	28	195	-	32	4	112
ZT02502	SPZ 250-02	2	250	254	4	2012	50	-	28	221	2	32	2	112
ZT02802	SPZ 280-02	2	280	284	4	2012	50	-	28	251	2	32	2	112
ZT03152	SPZ 315-02	2	315	319	4	2012	50	-	28	286	2	32	2	112
ZT03352	SPZ 355-02	2	355	359	4	2012	50	-	28	326	2	32	2	112
ZT04002	SPZ 400-02	2	400	404	4	2012	50	-	28	371	8,5	45	8,5	124
ZT04502	SPZ 450-02	2	450	454	4	2517	60	-	28	421	8,5	45	8,5	124

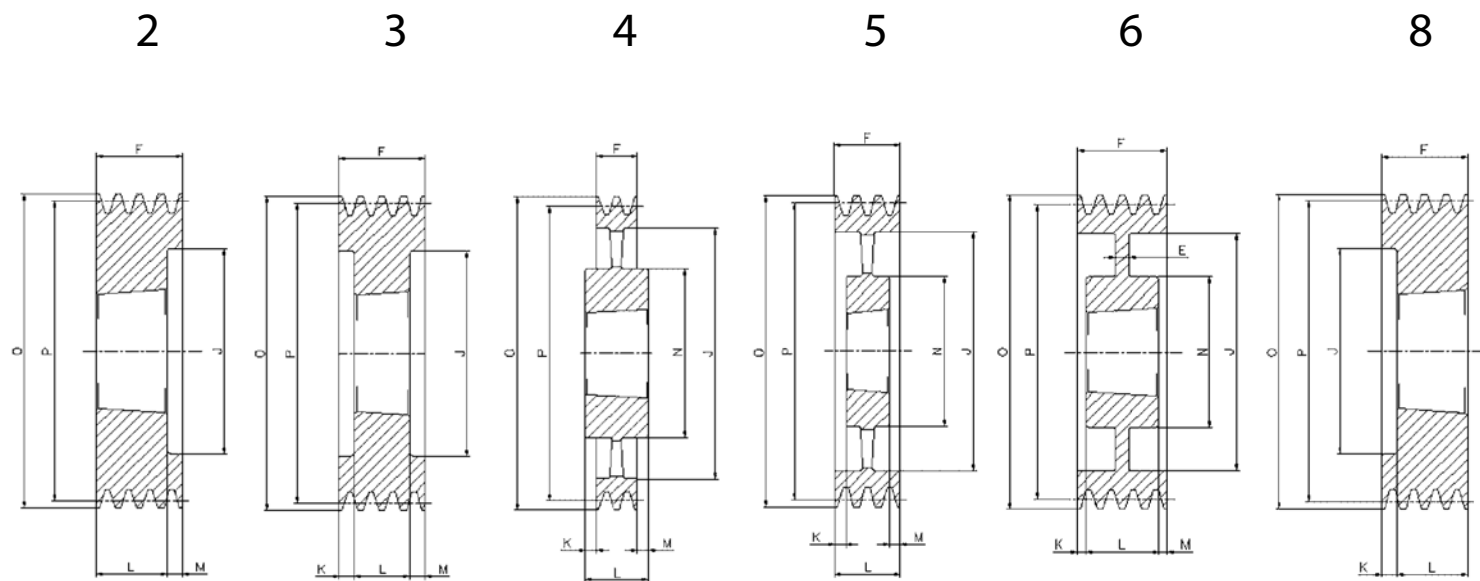


SPZ/B

Kod Zamówienia	Typ	Ilość Pasów	P	O	Form	TULEJA	Ø MAX	E	F	J	K	L	M	N
ZT00633	SPZ63-03	3	63	67	8	1108	28	-	40	40	-	22	-	-
ZT00673	SPZ67-03	3	67	71	8	1108	28	-	40	42	18	22	-	-
ZT00713	SPZ71-03	3	71	75	8	1108	28	-	40	42	18	22	-	-
ZT00753	SPZ75-03	3	75	79	8	1210	28	-	40	51	15	25	-	-
ZT00803	SPZ80-03	3	80	84	8	1210	32	-	40	51	15	25	-	-
ZT00853	SPZ85-03	3	85	89	8	1610	32	-	40	60	15	25	-	-
ZT00903	SPZ90-03	3	90	94	8	1610	42	-	40	61	15	25	-	-
ZT00953	SPZ95-03	3	95	99	8	1610	42	-	40	66	15	25	-	-
ZT01003	SPZ100-03	3	100	104	8	1610	42	-	40	71	15	25	-	-
ZT01063	SPZ106-03	3	106	110	8	1610	42	-	40	76	15	25	-	-
ZT01123	SPZ112-03	3	112	116	8	2012	50	-	40	83	8	32	-	-
ZT01183	SPZ118-03	3	118	122	8	2012	50	-	40	90	8	32	-	-
ZT01253	SPZ125-03	3	125	129	2	2012	50	-	40	96	-	32	8	-
ZT01323	SPZ132-03	3	132	136	2	2012	50	-	40	103	-	32	8	-
ZT01403	SPZ140-03	3	140	144	2	2012	50	-	40	111	-	32	8	-
ZT01503	SPZ150-03	3	150	154	2	2012	50	-	40	121	-	32	8	-
ZT01603	SPZ160-03	3	160	164	2	2012	50	-	40	131	4	32	8	-
ZT01703	SPZ170-03	3	170	174	3	2012	50	-	40	141	-	32	4	-
ZT01803	SPZ180-03	3	180	184	6	2012	50	7	40	151	4	32	8	106
ZT01903	SPZ190-03	3	190	194	6	2012	50	10	40	161	4	32	4	112
ZT02003	SPZ200-03	3	200	204	6	2012	50	10	40	171	4	32	4	112
ZT02243	SPZ224-03	3	224	228	6	2012	50	12	40	195	4	32	4	112
ZT02503	SPZ250-03	3	250	254	5	2012	50	-	40	221	-	32	4	112
ZT02803	SPZ280-03	3	280	284	4	2517	60	-	40	251	2,5	45	2,5	124
ZT03153	SPZ315-03	3	315	319	4	2517	60	-	40	286	2,5	45	2,5	124
ZT03553	SPZ355-03	3	355	359	4	2517	60	-	40	326	2,5	45	2,5	124
ZT04003	SPZ400-03	3	400	404	4	2517	60	-	40	371	2,5	45	2,5	124
ZT04503	SPZ450-03	3	450	454	4	2517	60	-	40	421	2,5	45	2,5	124
ZT05003	SPZ500-03	3	500	504	4	2517	60	-	40	471	2,5	45	2,5	124
ZT06303	SPZ630-03	3	630	634	4	3020	75	-	40	601	5,5	51	5,5	150
ZT08003	SPZ800-03	3	800	804	4	3020	75	-	40	771	5,5	51	5,5	146

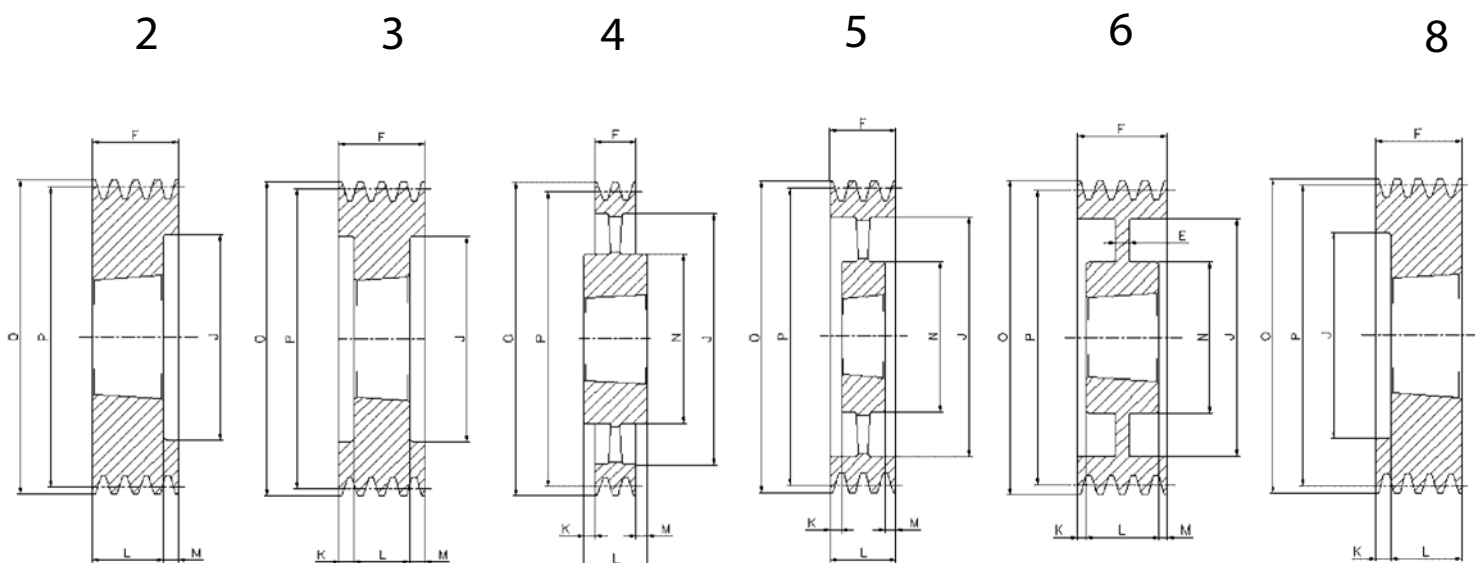

SPZ/4

Kod Zamówienia	Typ	Ilość Pasów	P	O	Form	TULEJA	Ø MAX	E	F	J	K	L	M	N
ZT00804	SPZ80-04	3	80	84	8	1210	32	-	52	51	27	25	-	-
ZT00854	SPZ85-04	3	85	89	8	1610	42	-	52	60	27	25	-	-
ZT00904	SPZ90-04	3	90	94	8	1610	42	-	52	61	27	25	-	-
ZT00954	SPZ95-04	3	95	99	8	1610	42	-	52	66	27	25	-	-
ZT01004	SPZ100-04	3	100	104	8	1610	42	-	52	71	27	25	-	-
ZT01064	SPZ106-04	3	106	110	8	1610	42	-	52	76	27	25	-	-
ZT01124	SPZ112-04	3	112	116	8	2012	50	-	52	83	20	32	-	-
ZT01184	SPZ118-04	3	118	122	8	2012	50	-	52	90	20	32	-	-
ZT01254	SPZ125-04	3	125	129	2	2012	50	-	52	96	-	32	20	-
ZT01324	SPZ132-04	3	132	136	2	2012	50	-	52	103	-	32	20	-
ZT01404	SPZ140-04	3	140	144	2	2012	50	-	52	111	-	32	20	-
ZT01504	SPZ150-04	3	150	154	2	2017	50	-	52	121	-	45	7	-
ZT01604	SPZ160-04	3	160	164	2	2017	50	-	52	131	-	45	7	-
ZT01704	SPZ170-04	3	170	174	2	2017	50	-	52	141	-	45	7	-
ZT01804	SPZ180-04	3	180	184	2	2017	50	-	52	151	-	45	7	-
ZT01904	SPZ190-04	3	190	194	3	2017	50	-	52	161	3,5	45	3,5	-
ZT02004	SPZ200-04	3	200	204	6	2017	50	8	52	171	3,5	45	3,5	124
ZT02244	SPZ224-04	3	224	228	6	2017	50	14	52	195	3,5	45	3,5	124
ZT02504	SPZ250-04	3	250	254	6	2017	50	12	52	221	3,5	45	3,5	124
ZT02804	SPZ280-04	3	280	284	6	2017	60	14	52	251	3,5	45	3,5	124
ZT03154	SPZ315-04	3	315	319	5	2017	60	-	52	286	3,5	45	3,5	124
ZT03554	SPZ355-04	3	355	359	5	2017	60	-	52	326	3,5	45	3,5	124
ZT04004	SPZ400-04	3	400	404	5	2017	60	-	52	371	3,5	45	3,5	124
ZT04504	SPZ450-04	3	450	454	5	3020	60	-	52	421	0,5	51	0,5	146
ZT05004	SPZ500-04	3	500	504	5	3020	60	-	52	471	0,5	51	0,5	146
ZT06304	SPZ630-04	3	630	634	4	3030	75	-	52	601	12	76	12	146
ZT08004	SPZ800-04	3	800	804	4	3030	75	-	52	771	12	76	12	146

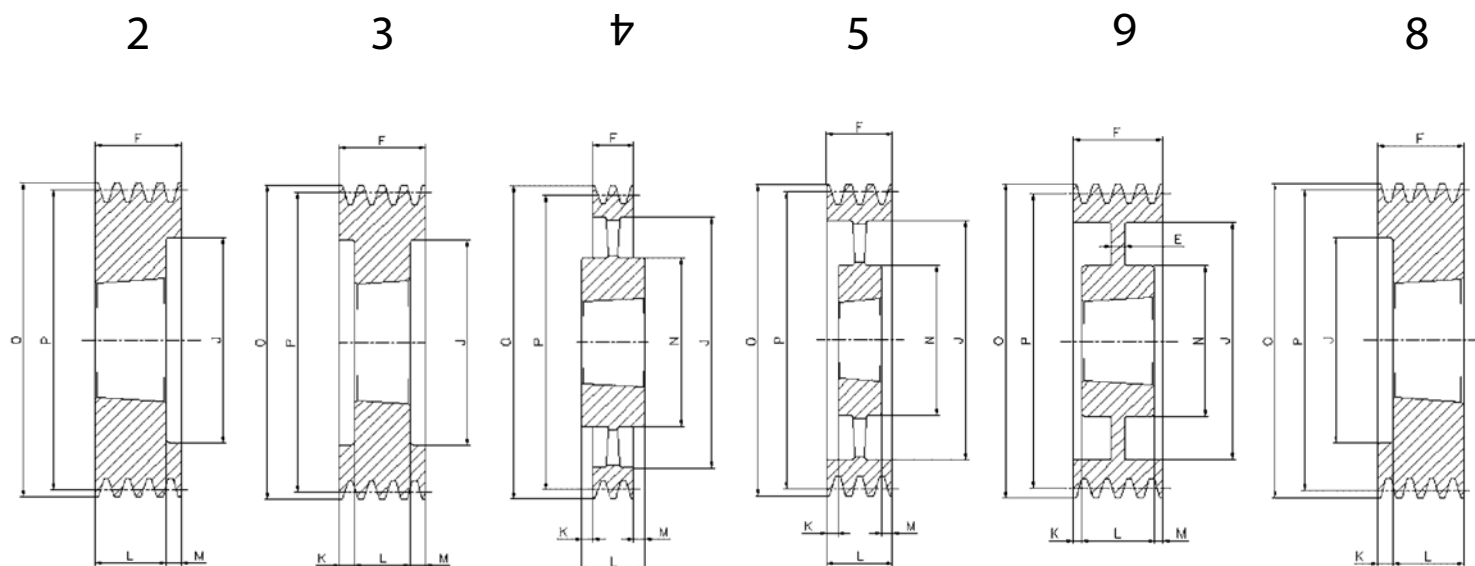

SPZ/B

Kod Zamówienia	Typ	Ilość Pasów	P	O	Form	TULEJA	Ø MAX	E	F	J	K	L	M	N
ZT00855	SPZ85-05	5	85	89	8	1610	42	-	64	60	39	25	-	-
ZT00905	SPZ90-05	5	90	94	8	1610	42	-	64	61	39	25	-	-
ZT00954	SPZ95-05	5	95	99	8	1610	42	-	64	66	39	25	-	-
ZT01005	SPZ100-05	5	100	104	8	2012	50	-	64	71	32	32	-	-
ZT01064	SPZ106-05	5	106	110	8	2012	50	-	64	76	32	32	-	-
ZT01124	SPZ112-05	5	112	116	8	2012	50	-	64	83	32	32	-	-
ZT01184	SPZ118-05	5	118	122	8	2012	50	-	64	90	32	32	-	-
ZT01254	SPZ125-05	5	125	129	8	2012	50	-	64	96	32	32	-	-
ZT01324	SPZ132-05	5	132	136	8	2517	60	-	64	103	19	45	19	-
ZT01405	SPZ140-05	5	140	144	2	2517	60	-	64	111	-	45	19	-
ZT01505	SPZ150-05	5	150	154	2	2517	60	-	64	121	-	45	19	-
ZT01605	SPZ160-05	5	160	164	2	2517	60	-	64	131	-	45	19	-
ZT01705	SPZ170-05	5	170	174	2	2517	60	-	64	141	-	45	19	-
ZT01805	SPZ180-05	5	180	184	2	2517	60	-	64	151	-	45	19	-
ZT01905	SPZ190-05	5	190	194	3	2517	60	-	64	161	9,5	45	9,5	-
ZT02005	SPZ200-05	5	200	204	3	2517	60	-	64	171	9,5	45	9,5	-
ZT02245	SPZ224-05	5	224	228	6	2517	60	20	64	195	9,5	45	9,5	124
ZT02505	SPZ250-05	5	250	254	6	2517	60	16	64	221	9,5	45	9,5	124
ZT02805	SPZ280-05	5	280	284	6	2517	60	15	64	251	9,5	45	9,5	124
ZT03155	SPZ315-05	5	315	319	5	2517	60	-	64	286	9,5	45	9,5	124
ZT03555	SPZ355-05	5	355	359	5	2517	60	-	64	326	9,5	45	9,5	124
ZT04005	SPZ400-05	5	400	404	5	3020	75	-	64	371	6,5	51	6,5	146
ZT04505	SPZ450-05	5	450	454	5	3020	75	-	64	421	6,5	51	6,5	146
ZT05005	SPZ500-05	5	500	504	4	3030	75	-	64	471	6	46	6	146
ZT06305	SPZ630-05	5	630	634	4	3030	75	-	64	601	6	76	6	146
ZT08005	SPZ800-05	5	800	804	4	3535	90	-	64	771	12,5	89	12,5	178

2







3

4

5

6


8

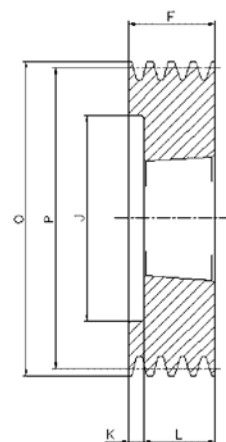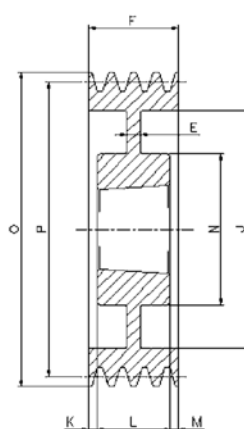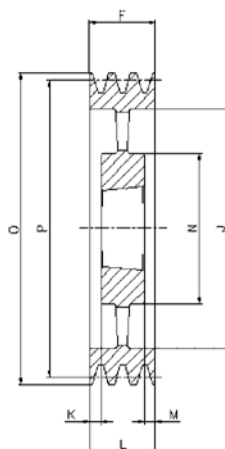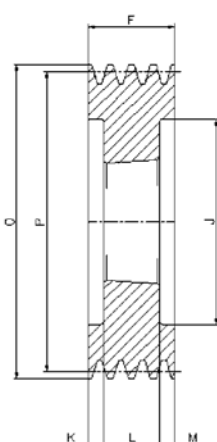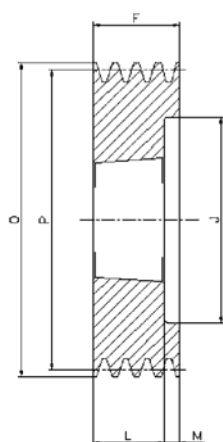


SPZ/G

Kod Zamówienia	Typ	Ilość Pasów	P	O	Form	TULEJA	Ø MAX	E	F	J	K	L	M	N
ZT00906	SPZ90-06	6	90	94	8	1610	42	-	76	61	51	25	-	-
ZT00956	SPZ95-06	6	95	99	8	1610	42	-	76	66	51	25	-	-
ZT01006	SPZ100-06	6	100	104	8	2012	50	-	76	71	44	32	-	-
ZT01066	SPZ106-06	6	106	110	8	2012	50	-	76	76	44	32	-	-
ZT01126	SPZ112-06	6	112	116	8	2012	50	-	76	83	44	32	-	-
ZT01186	SPZ118-06	6	118	122	8	2517	60	-	76	90	31	45	-	-
ZT01256	SPZ125-06	6	125	129	8	2517	60	-	76	96	31	45	-	-
ZT01326	SPZ132-06	6	132	136	8	2517	60	-	76	103	31	45	-	-
ZT01406	SPZ140-06	6	140	144	2	2517	60	-	76	111	-	45	31	-
ZT01506	SPZ150-06	6	150	154	2	2517	60	-	76	121	-	45	31	-
ZT01606	SPZ160-06	6	160	164	2	2517	60	-	76	131	-	45	31	-
ZT01706	SPZ170-06	6	170	174	2	2517	60	-	76	141	-	45	31	-
ZT01806	SPZ180-06	6	180	184	3	2517	60	-	76	151	15,5	45	15,5	-
ZT01906	SPZ190-06	6	190	194	3	2517	60	-	76	161	15,5	45	15,5	-
ZT02006	SPZ200-06	6	200	204	3	2517	60	-	76	171	15,5	45	15,5	-
ZT02246	SPZ224-06	6	224	228	6	2517	60	26	76	195	15,5	45	15,5	124
ZT02506	SPZ250-06	6	250	254	6	2517	60	26	76	221	15,5	45	15,5	124
ZT02806	SPZ280-06	6	280	284	6	2517	60	15	76	251	15,5	45	15,5	124
ZT03156	SPZ315-06	6	315	319	6	2517	60	15	76	286	15,5	45	15,5	124
ZT03556	SPZ355-06	6	355	359	5	2517	60	-	76	326	15,5	45	15,5	124
ZT04006	SPZ400-06	6	400	404	5	3030	75	-	76	371	-	76	-	146
ZT04506	SPZ450-06	6	450	454	5	3030	75	-	76	421	-	76	-	146
ZT06006	SPZ500-06	6	500	504	5	3030	75	-	76	471	-	76	-	146
ZT06306	SPZ630-06	6	630	634	4	3535	90	-	76	601	6,5	89	6,5	175
ZT08006	SPZ800-06	6	800	804	4	3535	90	-	76	771	6,5	89	6,5	178


3



5

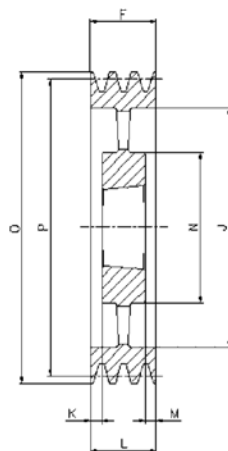


6

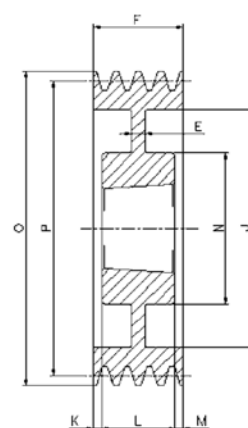

SPZ/8


Kod Zamówienia	Typ	Ilość Pasów	P	O	Form	TULEJA	Ø MAX	E	F	J	K	L	M	N
ZT01408	SPZ140-08	8	140	144	3	2517	60	-	100	111	27,5	45	27,5	-
ZT01508	SPZ150-08	8	150	154	3	2517	60	-	100	121	27,5	45	27,5	-
ZT01608	SPZ160-08	8	160	164	3	2517	60	-	100	131	27,5	45	27,5	-
ZT01808	SPZ180-08	8	180	184	3	2517	60	-	100	151	27,5	45	27,5	-
ZT02008	SPZ200-08	8	200	204	3	3020	75	-	100	171	217,5	51	217,5	-
ZT02248	SPZ224-08	8	224	228	3	3020	75	-	100	195	217,5	51	217,5	-
ZT02508	SPZ250-08	8	250	254	6	3020	75	20	100	221	217,5	51	217,5	146
ZT02808	SPZ280-08	8	280	284	6	3020	75	20	100	251	217,5	51	217,5	146
ZT03558	SPZ355-08	8	355	359	5	3030	75	-	100	326	12	76	12	146
ZT04008	SPZ400-08	8	400	404	5	3030	75	-	100	371	12	76	12	146
ZT04508	SPZ450-08	8	450	454	5	3535	90	-	100	421	5,5	89	5,5	175

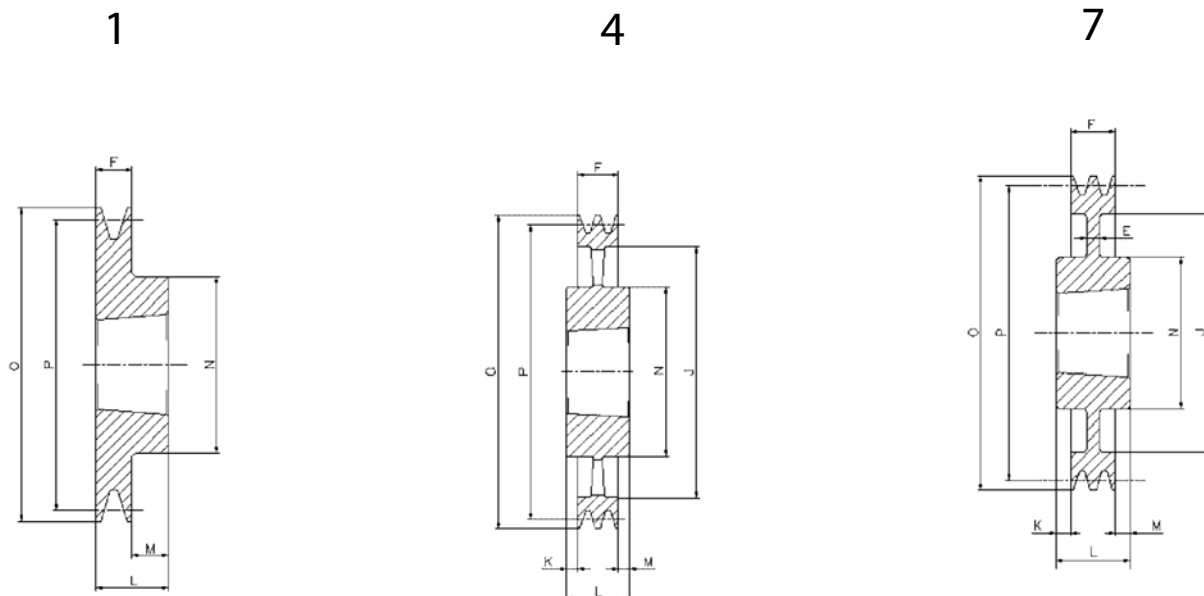


SPA/1

Kod Zamówienia	Typ	Ilość Pasów	P	Q	Form	TULEJA	Ø MAX	E	F	J	K	L	M	N
AT00631	SPA 63-01	1	63	68,5	1	1008	25	-	20	-	-	22	2	56
AT00671	SPA 67-01	1	67	72,5	1	1108	28	-	20	-	-	22	2	56
AT00711	SPA 71-01	1	71	76,5	1	1108	28	-	20	-	-	22	2	60
AT00751	SPA 75-01	1	75	80,5	1	1108	28	-	20	-	-	22	2	56
AT00801	SPA 80-01	1	80	85,5	1	1210	32	-	20	-	-	25	5	75
AT00851	SPA 85-01	1	85	90,5	1	1210	32	-	20	-	-	25	5	80
AT00901	SPA 90-01	1	90	95,5	1	1210	32	-	20	-	-	25	5	80
AT00951	SPA 95-01	1	95	100,5	1	1210	32	-	20	-	-	25	5	85
AT01001	SPA 100-01	1	100	105,5	1	1610	42	-	20	-	-	25	5	85
AT01061	SPA 106-01	1	106	111,5	1	1610	42	-	20	-	-	25	5	92
AT01121	SPA 112-01	1	112	117,5	1	1610	42	-	20	-	-	25	5	92
AT01181	SPA 118-01	1	118	123,5	1	1610	42	-	20	-	-	25	5	92
AT01251	SPA 125-01	1	125	130,5	1	1610	42	-	20	-	-	25	5	92
AT01321	SPA 132-01	1	132	137,7	1	1610	42	-	20	-	-	25	5	92
AT01401	SPA 140-01	1	140	145,5	1	1610	42	-	20	-	-	25	5	92
AT01501	SPA 150-01	1	150	155,5	1	1610	42	-	20	-	-	25	5	92
AT01601	SPA 160-01	1	160	165,5	1	1610	42	-	20	-	-	25	5	92
AT01701	SPA 170-01	1	170	175,5	1	1610	42	-	20	-	-	25	5	92
AT01801	SPA 180-01	1	180	185,5	7	1610	42	6	20	145	-	25	5	92
AT01901	SPA 190-01	1	190	195,5	7	1610	42	6	20	156	-	25	5	92
AT02001	SPA 200-01	1	200	205,5	7	2012	50	6	20	165	-	32	12	108
AT02121	SPA 212-01	1	212	217,5	7	2012	50	10	20	177	-	32	12	110
AT02241	SPA 224-01	1	224	229,5	7	2012	50	10	20	189	-	32	12	112
AT02361	SPA 236-01	1	236	241,5	7	2012	50	10	20	202	-	32	12	112
AT02501	SPA 250-01	1	250	255,5	7	2012	50	10	20	215	6	32	6	112
AT02801	SPA 280-01	1	280	285,5	7	2012	50	10	20	245	-	32	12	112
AT03151	SPA 315-01	1	315	320,5	7	2012	50	12	20	280	-	32	12	112
AT03551	SPA 355-01	1	355	360,5	4	2012	50	-	20	320	-	32	12	112
AT04001	SPA 400-01	1	400	405,5	4	2012	50	-	20	365	-	32	12	112
AT04501	SPA 450-01	1	450	455,5	4	2012	50	-	20	415	-	32	12	112
AT05001	SPA 500-01	1	500	505,5	4	2517	60	-	20	465	-	45	25	124
AT06301	SPA 630-01	1	630	635,5	4	2517	60	-	20	595	-	45	25	124


4

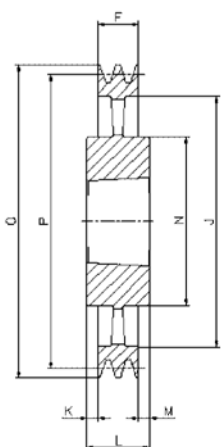


6

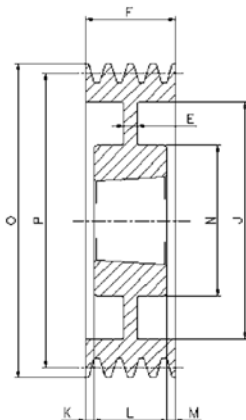

7

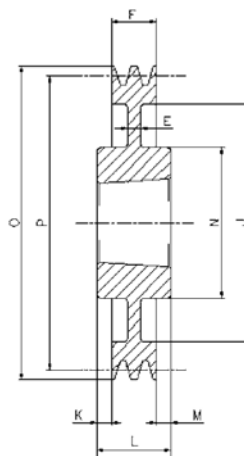

8

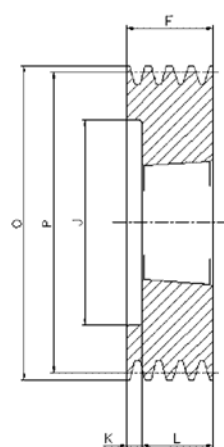

SPA/2





Kod Zamówienia	Typ	Ilość Pasów	P	O	Form	TULEJA	Ø MAX	E	F	J	K	L	M	N
AT00632	SPA 63-02	1	63	68,5	8	1008	28	-	20	-	-	22	2	56
AT00672	SPA 67-02	1	67	72,5	8	1108	28	-	20	-	-	22	2	56
AT00712	SPA 71-02	1	71	76,5	8	1108	28	-	20	-	-	22	2	60
AT00752	SPA 75-02	1	75	80,5	8	1108	28	-	20	-	-	22	2	56
AT00802	SPA 80-02	1	80	85,5	8	1210	32	-	20	-	-	25	5	75
AT00852	SPA 85-02	1	85	90,5	8	1210	32	-	20	-	-	25	5	80
AT00902	SPA 90-02	1	90	95,5	8	1610	42	-	20	-	-	25	5	80
AT00952	SPA 95-02	1	95	100,5	8	1610	42	-	20	-	-	25	5	85
AT01002	SPA 100-02	1	100	105,5	8	1610	42	-	20	-	-	25	5	85
AT01062	SPA 106-02	1	106	111,5	8	1610	42	-	20	-	-	25	5	92
AT01122	SPA 112-02	1	112	117,5	8	1610	42	-	20	-	-	25	5	92
AT01182	SPA 118-02	1	118	123,5	8	1610	42	-	20	-	-	25	5	92
AT01252	SPA 125-02	1	125	130,5	8	1610	42	-	20	-	-	25	5	92
AT01322	SPA 132-02	1	132	137,7	8	2012	50	-	20	-	-	25	5	92
AT01402	SPA 140-02	1	140	145,5	8	2012	50	-	20	-	-	25	5	92
AT01502	SPA 150-02	1	150	155,5	8	2012	50	-	20	-	-	25	5	92
AT01602	SPA 160-02	1	160	165,5	8	2012	50	-	20	-	-	25	5	92
AT01702	SPA 170-02	1	170	175,5	8	2012	50	-	20	-	-	25	5	92
AT01802	SPA 180-02	1	180	185,5	6	2012	50	6	20	145	-	25	5	92
AT01902	SPA 190-02	1	190	195,5	6	2012	50	6	20	156	-	25	5	92
AT02002	SPA 200-02	1	200	205,5	7	2517	60	6	20	165	-	32	12	108
AT02122	SPA 212-02	1	212	217,5	7	2517	60	10	20	177	-	32	12	110
AT02242	SPA 224-02	1	224	229,5	7	2517	60	10	20	189	-	32	12	112
AT02362	SPA 236-02	1	236	241,5	7	2517	60	10	20	202	-	32	12	112
AT02502	SPA 250-02	1	250	255,5	7	2517	60	10	20	215	6	32	6	112
AT02802	SPA 280-02	1	280	285,5	7	2517	60	10	20	245	-	32	12	112
AT03152	SPA 315-02	1	315	320,5	7	2517	60	12	20	280	-	32	12	112
AT03552	SPA 355-02	1	355	360,5	4	2517	60	-	20	320	-	32	12	112
AT04002	SPA 400-02	1	400	405,5	4	2517	60	-	20	365	-	32	12	112
AT04502	SPA 450-02	1	450	455,5	4	2517	60	-	20	415	-	32	12	112
AT05002	SPA 500-02	1	500	505,5	4	2517	60	-	20	465	-	45	25	124
AT06302	SPA 630-02	1	630	635,5	4	3020	75	-	20	595	-	45	25	124

2

4

6


8

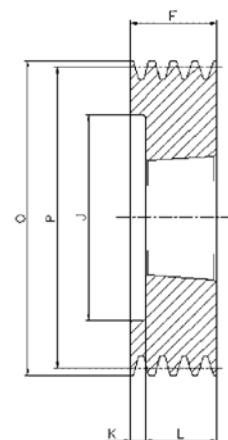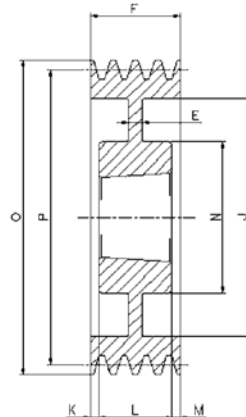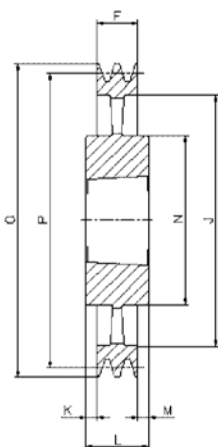


SPA/B

Kod Zamówienia	Typ	Ilość Pasów	P	O	Form	TULEJA	Ø MAX	E	F	J	K	L	M	N
AT00713	SPA 71-03	3	71	76,5	8	1108	28	-	50	40	28	22	-	-
AT00753	SPA 75-03	3	75	80,5	8	1108	28	-	50	44	28	22	-	-
AT00803	SPA 80-03	3	80	85,5	8	1210	32	-	50	50	25	25	-	-
AT00853	SPA 85-03	3	85	90,5	8	1210	32	-	50	55	25	25	-	-
AT00903	SPA 90-03	3	90	95,5	8	1610	42	-	50	59	25	25	-	-
AT00953	SPA 95-03	3	95	100,5	8	1610	42	-	50	63	25	25	-	-
AT01003	SPA 100-03	3	100	105,5	2	1610	42	-	50	66	-	25	25	-
AT01063	SPA 106-03	3	106	111,5	2	1610	42	-	50	72	-	32	25	-
AT01123	SPA 112-03	3	112	117,5	8	2012	50	-	50	78	18	32	-	-
AT01183	SPA 118-03	3	118	123,5	2	2012	50	-	50	84	-	32	18	-
AT01253	SPA 125-03	3	125	130,5	2	2012	50	-	50	91	-	32	18	-
AT01323	SPA 132-03	3	132	137,7	2	2012	50	-	50	98	-	32	18	-
AT01403	SPA 140-03	3	140	145,5	8	2517	60	-	50	106	5	45	-	-
AT01503	SPA 150-03	3	150	155,5	8	2517	60	-	50	116	5	45	-	-
AT01603	SPA 160-03	3	160	165,5	8	2517	60	-	50	125	5	45	-	-
AT01703	SPA 170-03	3	170	175,5	8	2517	60	-	50	135	5	45	-	-
AT01803	SPA 180-03	3	180	185,5	8	2517	60	-	50	146	5	45	-	-
AT01903	SPA 190-03	3	190	195,5	8	2517	60	-	50	156	5	45	-	-
AT02003	SPA 200-03	3	200	205,5	6	2517	60	20	50	165	2,5	45	2,5	123
AT02123	SPA 212-03	3	212	217,5	6	2517	60	20	50	177	2,5	45	2,5	123
AT02243	SPA 224-03	3	224	229,5	6	2517	60	20	50	189	2,5	45	2,5	124
AT02363	SPA 236-03	3	236	241,5	6	2517	60	20	50	202	2,5	45	2,5	124
AT02503	SPA 250-03	3	250	255,5	6	2517	60	20	50	215	2,5	45	2,5	124
AT02803	SPA 280-03	3	280	285,5	6	2517	60	20	50	245	2,5	45	2,5	124
AT03153	SPA 315-03	3	315	320,5	4	3020	75	25	50	280	0,5	51	0,5	159
AT03553	SPA 355-03	3	355	360,5	4	3020	75	-	50	320	0,5	51	0,5	159
AT04003	SPA 400-03	3	400	405,5	4	3020	75	-	50	365	-	51	1	159
AT04503	SPA 450-03	3	450	455,5	4	3020	75	-	50	415	-	51	1	159
AT05003	SPA 500-03	3	500	505,5	4	3020	75	-	50	465	-	51	1	159
AT05603	SPA 560-03	3	560	565,5	4	3020	75	-	50	525	-	51	1	150
AT06303	SPA 630-03	3	630	635,5	4	3020	75	-	50	595	-	51	1	150
AT08003	SPA 800-03	3	800	805,5	4	3535	90	-	50	765	19,5	89	19,5	175
AT10003	SPA 1000-03	3	1000	1005,5	4	3535	90	-	50	965	19,5	89	19,5	175


2




4

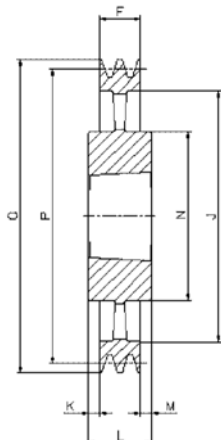


5

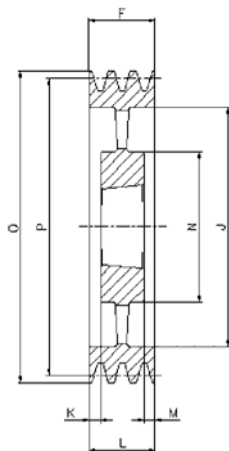

6

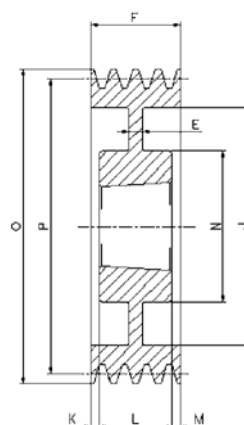

8



SPA/4


Kod Zamówienia	Typ	Ilość Pasów	P	O	Form	TULEJA	Ø MAX	E	F	J	K	L	M	N
AT00904	SPA 90-04	4	90	95,5	8	1615	42	-	65	59	27	38	-	-
AT00954	SPA 95-04	4	95	100,5	8	1615	42	-	65	63	27	38	-	-
AT01004	SPA 100-04	4	100	105,5	2	1615	42	-	65	66	-	38	27	-
AT01064	SPA 106-04	4	106	111,5	8	2012	50	-	65	72	33	32	-	-
AT01124	SPA 112-04	4	112	117,5	8	2012	50	-	65	78	33	32	-	-
AT01184	SPA 118-04	4	118	123,5	2	2012	50	-	65	84	-	32	33	-
AT01254	SPA 125-04	4	125	130,5	2	2012	50	-	65	91	-	32	33	-
AT01324	SPA 132-04	4	132	137,7	2	2517	60	-	65	98	-	45	20	-
AT01404	SPA 140-04	4	140	145,5	2	2517	60	-	65	106	-	45	20	-
AT01504	SPA 150-04	4	150	155,5	2	2517	60	-	65	116	-	45	20	-
AT01604	SPA 160-04	4	160	165,5	2	2517	60	-	65	125	-	45	20	-
AT01704	SPA 170-04	4	170	175,5	2	2517	60	-	65	135	-	45	20	-
AT01804	SPA 180-04	4	180	185,5	2	2517	60	-	65	146	-	45	20	-
AT01904	SPA 190-04	4	190	195,5	2	2517	60	-	65	156	-	45	20	-
AT02004	SPA 200-04	4	200	205,5	2	3020	75	-	65	165	-	51	14	-
AT02124	SPA 212-04	4	212	217,5	2	3020	75	-	65	177	-	51	14	-
AT02244	SPA 224-04	4	224	229,5	2	3020	75	-	65	189	-	51	14	-
AT02364	SPA 236-04	4	236	241,5	6	3020	75	25	65	202	-	51	14	-
AT02504	SPA 250-04	4	250	255,5	6	3020	75	20	65	215	7	51	7	159
AT02804	SPA 280-04	4	280	285,5	6	3020	75	25	65	245	7	51	7	159
AT03154	SPA 315-04	4	315	320,5	6	3020	75	25	65	280	7	51	7	159
AT03554	SPA 355-04	4	355	360,5	5	3020	75	-	65	320	7	51	7	159
AT04004	SPA 400-04	4	400	405,5	5	3020	75	-	65	365	7	51	7	159
AT04504	SPA 450-04	4	450	455,5	5	3020	75	-	65	415	7	51	7	159
AT05004	SPA 500-04	4	500	505,5	5	3020	75	-	65	465	7	51	7	159
AT05604	SPA 560-04	4	560	565,5	4	3535	90	-	65	525	12	89	12	175
AT06304	SPA 630-04	4	630	635,5	4	3535	90	-	65	595	12	89	12	175
AT08004	SPA 800-04	4	800	805,5	4	3535	90	-	65	765	12	89	12	175
AT10004	SPA 1000-04	4	1000	1005,5	4	4040	100	-	65	965	18,5	102	18,5	210

2

4

6


8

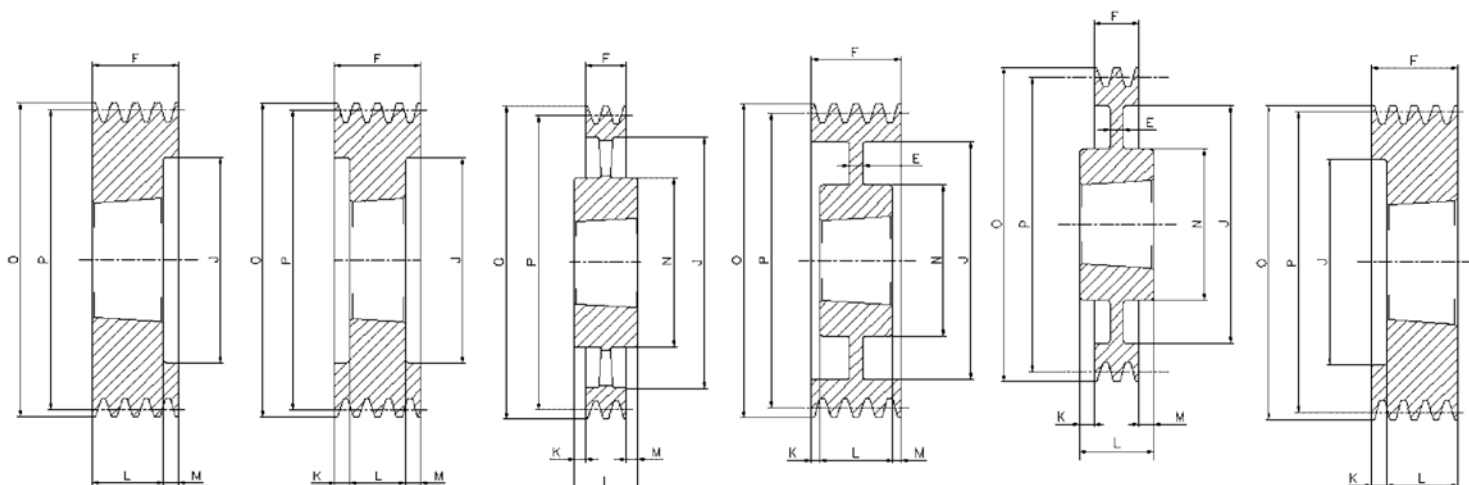


SPA/B

Kod Zamówienia	Typ	Ilość Pasów	P	O	Form	TULEJA	Ø MAX	E	F	J	K	L	M	N
AT01005	SPA 100-05	5	100	105,5	3	1610	42	-	80	66	-	38	42	-
AT01065	SPA 106-05	5	106	111,5	8	2012	50	-	80	72	48	32	-	-
AT01125	SPA 112-05	5	112	117,5	8	2012	50	-	80	78	48	32	-	-
AT01185	SPA 118-05	5	118	123,5	8	2012	50	-	80	84	-	32	48	-
AT01255	SPA 125-05	5	125	130,5	3	2012	50	-	80	91	24	32	24	-
AT01325	SPA 132-05	5	132	137,7	3	2517	60	-	80	98	17,5	45	17,5	-
AT01405	SPA 140-05	5	140	145,5	3	2517	60	-	80	106	17,5	45	17,5	-
AT01505	SPA 150-05	5	150	155,5	3	2517	60	-	80	116	17,5	45	17,5	-
AT01605	SPA 160-05	5	160	165,5	3	2517	60	-	80	125	17,5	45	17,5	-
AT01705	SPA 170-05	5	170	175,5	3	2517	60	-	80	135	17,5	45	17,5	-
AT01805	SPA 180-05	5	180	185,5	3	3020	75	-	80	146	-	51	29	-
AT01905	SPA 190-05	5	190	195,5	3	3020	75	-	80	156	117,5	51	117,5	-
AT02005	SPA 200-05	5	200	205,5	3	3020	75	-	80	165	117,5	51	117,5	-
AT02125	SPA 212-05	5	212	217,5	3	3020	75	-	80	177	-	51	29	-
AT02245	SPA 224-05	5	224	229,5	3	3020	75	-	80	189	-	51	29	-
AT02365	SPA 236-05	5	236	241,5	3	3020	75	-	80	202	-	51	29	-
AT02505	SPA 250-05	5	250	255,5	6	3020	75	20	80	215	117,5	51	117,5	159
AT02805	SPA 280-05	5	280	285,5	6	3535	90	25	80	245	17,5	89	17,5	175
AT03155	SPA 315-05	5	315	320,5	6	3535	90	25	80	280	17,5	89	17,5	175
AT03555	SPA 355-05	5	355	360,5	5	3535	90	-	80	320	17,5	89	17,5	175
AT04005	SPA 400-05	5	400	405,5	5	3535	90	-	80	365	17,5	89	17,5	175
AT04505	SPA 450-05	5	450	455,5	5	3535	90	-	80	415	17,5	89	17,5	175
AT05005	SPA 500-05	5	500	505,5	5	3535	90	-	80	465	17,5	89	17,5	175
AT05605	SPA 560-05	5	560	565,5	5	3535	90	-	80	525	17,5	89	17,5	175
AT06305	SPA 630-05	5	630	635,5	4	4040	100	-	80	595	17,5	89	17,5	175
AT08005	SPA 800-05	5	800	805,5	4	4040	100	-	80	765	11	102	11	210
AT10005	SPA 1000-05	5	1000	1005,5	4	4545	110	-	80	965	17	114	17	242


2




4

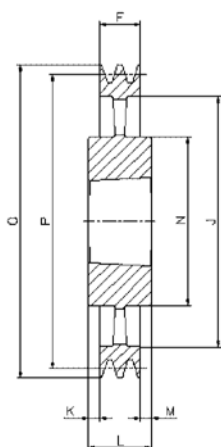


5

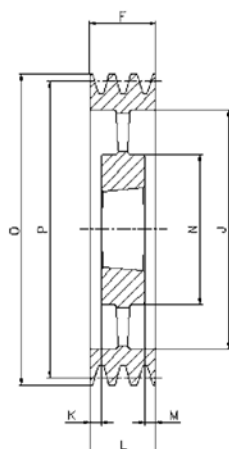

6

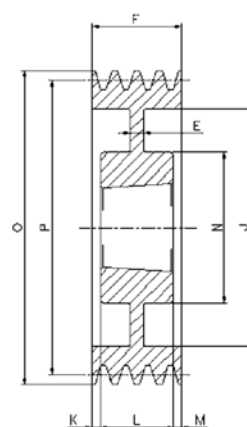


8




SPA/G

Kod Zamówienia	Typ	Ilość Pasów	P	O	Form	TULEJA	Ø MAX	E	F	J	K	L	M	N
AT01006	SPA 100-06	5	100	105,5	3	1610	42	-	95	66	30	25	40	-
AT01066	SPA 106-06	5	106	111,5	8	2012	50	-	95	72	63	32	-	-
AT01126	SPA 112-06	5	112	117,5	8	2012	50	-	95	78	63	32	-	-
AT01186	SPA 118-06	5	118	123,5	8	2012	50	-	95	84	63	32	-	-
AT01256	SPA 125-06	5	125	130,5	3	2012	50	-	95	91	31,5	32	31,5	-
AT01326	SPA 132-06	5	132	137,7	3	2517	60	-	95	98	25	45	25	-
AT01406	SPA 140-06	5	140	145,5	3	2517	60	-	95	106	25	45	25	-
AT01506	SPA 150-06	5	150	155,5	3	2517	60	-	95	116	25	45	25	-
AT01606	SPA 160-06	5	160	165,5	3	2517	60	-	95	125	25	45	25	-
AT01706	SPA 170-06	5	170	175,5	3	2517	60	-	95	135	25	45	22	-
AT01806	SPA 180-06	5	180	185,5	3	3020	75	-	95	146	22	51	22	-
AT01906	SPA 190-06	5	190	195,5	3	3020	75	-	95	156	22	51	22	-
AT02006	SPA 200-06	5	200	205,5	3	3020	75	-	95	165	22	51	22	-
AT02126	SPA 212-06	5	212	217,5	3	3020	75	-	95	177	22	51	22	-
AT02246	SPA 224-06	5	224	229,5	3	3020	75	-	95	189	22	51	22	-
AT02366	SPA 236-06	5	236	241,5	3	3020	75	-	95	202	22	51	22	-
AT02506	SPA 250-06	5	250	255,5	6	3020	75	20	95	215	22	51	22	155
AT02806	SPA 280-06	5	280	285,5	6	3535	90	25	95	245	3	89	3	175
AT03156	SPA 315-06	5	315	320,5	6	3535	90	25	95	280	3	89	3	175
AT03556	SPA 355-06	5	355	360,5	5	3535	90	-	95	320	3	89	3	175
AT04006	SPA 400-06	5	400	405,5	5	3535	90	-	95	365	3	89	3	175
AT04506	SPA 450-06	5	450	455,5	5	3535	90	-	95	415	3	89	3	175
AT05006	SPA 500-06	5	500	505,5	5	3535	90	-	95	465	3	89	3	175
AT05606	SPA 560-06	5	560	565,5	5	3535	90	-	95	525	3	89	3	175
AT06306	SPA 630-06	5	630	635,5	4	4040	100	-	95	595	3,5	102	3,5	210
AT08006	SPA 800-06	5	800	805,5	4	4040	100	-	95	765	3,5	102	3,5	210
AT10006	SPA 1000-06	5	1000	1005,5	4	4545	110	-	95	965	9,5	114	3,5	242


1

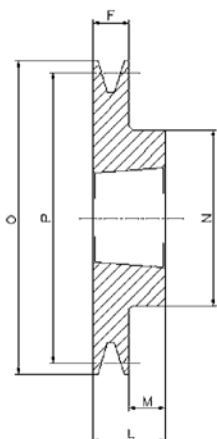

6

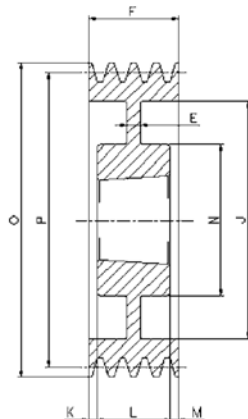


7

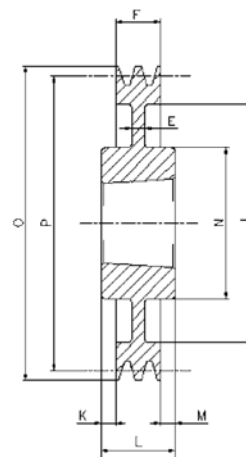


SPB/1

Kod Zamówienia	Typ	Ilość Pasów	P	O	Form	TULEJA	Ø MAX	E	F	J	K	L	M	N
BT01001	SPB100-011	1	100	107	1	1610	42	-	25	-	-	25	-	-
BT01061	SPB106-1	1	106	113	1	1610	42	-	25	-	-	25	-	-
BT01121	SPB112-01	1	112	119	1	1610	42	-	25	-	-	25	-	-
BT01181	SPB118-01	1	118	125	1	1610	42	-	25	-	-	25	-	-
BT01251	SPB125-01	1	125	132	1	1610	42	-	25	-	-	25	-	-
BT01321	SPB132-01	1	132	139	1	1610	42	-	25	-	-	25	-	-
BT01401	SPB140-01	1	140	147	1	1610	42	-	25	-	-	25	-	-
BT01501	SPB150-01	1	150	157	1	1610	42	-	25	-	-	25	-	-
BT01601	SPB160-01	1	160	167	1	1610	42	-	25	-	-	25	-	-
BT01701	SPB170-01	1	170	177	1	1610	42	-	25	-	-	25	-	-
BT01801	SPB180-01	1	180	187	6	1610	42	15	25	132	-	25	-	90
BT01901	SPB190-01	1	190	197	7	2012	50	15	25	147	3,5	32	3,5	104
BT02001	SPB200-01	1	200	207	7	2012	50	15	25	157	3,5	32	3,5	104
BT02121	SPB212-01	1	212	219	7	2012	50	15	25	169	3,5	32	3,5	104
BT02241	SPB224-01	1	224	231	7	2012	50	15	25	181	3,5	32	3,5	104
BT02361	SPB236-01	1	236	243	7	2012	50	15	25	193	3,5	32	3,5	104
BT02501	SPB250-01	1	250	257	7	2012	50	20	25	207	3,5	32	3,5	104
BT02801	SPB280-01	1	280	287	7	2012	50	20	25	237	3,5	32	3,5	104
BT03001	SPB300-01	1	300	307	7	2012	50	20	25	258	3,5	32	3,5	104
BT03151	SPB315-01	1	315	322	7	2012	50	20	25	272	3,5	32	3,5	104


1




2




4



7

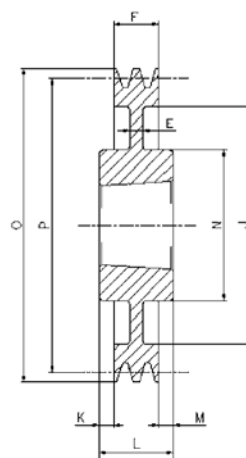


8




SPB/2

Kod Zamówienia	Typ	Ilość Pasów	P	O	Form	TULEJA	Ø MAX	E	F	J	K	L	M	N
BT01002	SPB100-02	2	100	107	8	1610	42	-	44	62	19	25	-	-
BT01062	SPB106-02	2	106	113	8	1610	42	-	44	67	19	25	-	-
BT01122	SPB112-02	2	112	119	8	1610	42	-	44	72	19	25	-	-
BT01182	SPB118-02	2	118	125	2	1610	42	-	44	78	-	25	19	-
BT01252	SPB125-02	2	125	132	2	2012	50	-	44	82	-	32	12	-
BT01322	SPB132-02	2	132	139	2	2012	50	-	44	89	-	32	12	-
BT01402	SPB140-02	2	140	147	2	2012	50	-	44	97	-	32	12	-
BT01502	SPB150-02	2	150	157	2	2012	50	-	44	107	-	32	12	-
BT01602	SPB160-02	2	160	167	2	2012	50	-	44	117	-	32	12	-
BT01702	SPB170-02	2	170	177	2	2012	50	-	44	127	-	32	12	-
BT01802	SPB180-02	2	180	187	1	2517	60	-	44	-	-	45	1	120
BT01902	SPB190-02	2	190	197	1	2517	60	-	44	-	-	45	1	120
BT02002	SPB200-02	2	200	207	1	2517	60	-	44	-	-	45	1	117
BT02122	SPB212-02	2	212	219	7	2517	60	20	44	189	-	45	1	117
BT02242	SPB224-02	2	224	231	7	2517	60	15	44	181	-	45	1	117
BT02362	SPB236-02	2	236	243	7	2517	60	15	44	193	-	45	1	117
BT02502	SPB250-02	2	250	257	7	2517	60	20	44	207	-	45	1	125
BT02802	SPB280-02	2	280	287	7	2517	60	20	44	237	-	45	1	125
BT03002	SPB300-02	2	300	307	7	2517	60	20	44	257	-	45	1	125
BT03152	SPB315-02	2	315	322	7	2517	60	20	44	272	-	45	1	125
BT03352	SPB335-02	2	335	342	7	2517	60	20	44	292	-	45	1	125
BT03552	SPB355-02	2	355	362	7	3020	75	15	44	312	3,5	51	3,5	144
BT04002	SPB315-02	2	400	407	4	3020	75	-	44	357	3,5	51	3,5	150
BT04502	SPB400-02	2	450	457	4	3020	75	-	44	407	3,5	51	3,5	150
BT05002	SPB450-02	2	500	507	4	3020	75	-	44	457	3,5	51	3,5	150
BT05602	SPB560-02	2	560	567	4	3020	75	-	44	517	4	76	28	150
BT06302	SPB630-02	2	630	637	4	3020	75	-	44	587	16	76	16	150


2

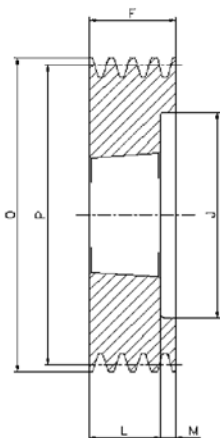


4

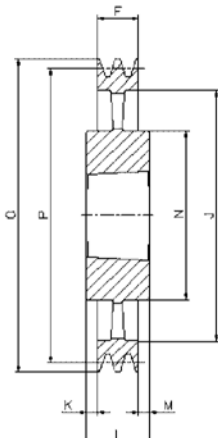

6

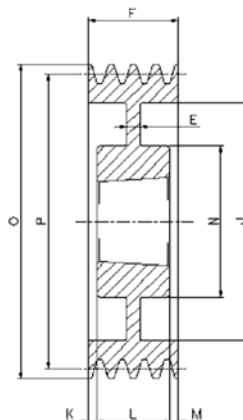

8

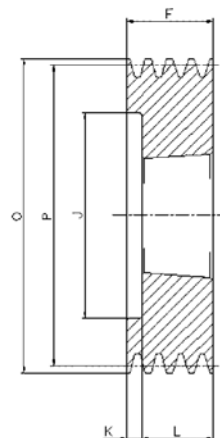

SPB/B





Kod Zamówienia	Typ	Ilość Pasów	P	O	Form	TULEJA	Ø MAX	E	F	J	K	L	M	N
BT01003	SPB100-03	3	100	107	3	1610	42	-	63	62	38	25	-	-
BT01063	SPB106-03	3	106	113	3	1610	42	-	63	67	38	25	-	-
BT01123	SPB112-03	3	112	119	3	1610	42	-	63	72	38	25	-	-
BT01183	SPB118-03	3	118	125	3	1610	42	-	63	78	-	25	38	-
BT01253	SPB125-03	3	125	132	3	2012	50	-	63	82	-	32	31	-
BT01323	SPB132-03	3	132	139	3	2012	50	-	63	89	-	32	31	-
BT01403	SPB140-03	3	140	147	3	2012	50	-	63	97	-	32	31	-
BT01503	SPB150-03	3	150	157	3	2517	60	-	63	107	-	45	18	-
BT01603	SPB160-03	3	160	167	3	2517	60	-	63	117	-	45	18	-
BT01703	SPB170-03	3	170	177	3	2517	60	-	63	127	-	45	18	-
BT01803	SPB180-03	3	180	187	3	2517	60	-	63	137	-	45	18	-
BT01903	SPB190-03	3	190	197	3	2517	60	-	63	147	-	45	18	-
BT02003	SPB200-03	3	200	207	3	2517	60	-	63	157	-	45	18	-
BT02123	SPB212-03	3	212	219	3	2517	60	15	63	169	-	45	18	117
BT02243	SPB224-03	3	224	231	3	2517	60	15	63	181	-	45	18	117
BT02363	SPB236-03	3	236	243	3	2517	60	15	63	193	-	45	18	117
BT02503	SPB250-03	3	250	257	6	3020	75	20	63	207	-	51	12	144
BT02803	SPB280-03	3	280	287	6	3020	75	20	63	237	6	51	6	144
BT03003	SPB300-03	3	300	307	7	3020	75	20	63	257	6	51	6	144
BT03153	SPB315-03	3	315	322	7	3020	75	20	63	272	6	51	6	144
BT03353	SPB335-03	3	335	342	7	3020	75	20	63	292	6	51	6	144
BT03553	SPB355-03	3	355	362	7	3020	75	15	63	312	6	51	6	144
BT04003	SPB315-03	3	400	407	4	3535	90	-	63	357	13	89	13	175
BT04503	SPB400-03	3	450	457	4	3535	90	-	63	407	-	89	26	175
BT05003	SPB450-03	3	500	507	4	3535	90	-	63	457	-	89	26	175
BT05603	SPB560-03	3	560	567	4	3535	90	-	63	517	-	89	26	175
BT06303	SPB630-03	3	630	637	4	3535	90	-	63	587	-	89	26	175
BT07103	SPB710-03	3	710	717	4	3535	90	-	63	664	13	89	13	175
BT08003	SPB800-03	3	800	807	4	3535	90	-	63	754	13	89	13	175
BT09003	SPB900-03	3	900	907	4	3535	90	-	63	854	13	89	13	175
BT10003	SPB1000-03	3	1000	1007	4	4040	100	-	63	954	19,5	102	19,5	210
BT12503	SPB1250-03	3	1250	1257	4	4040	100	-	63	1204	19,5	102	19,5	210

3

4

6


7

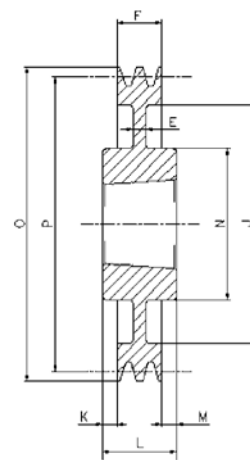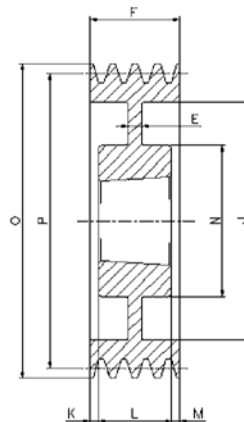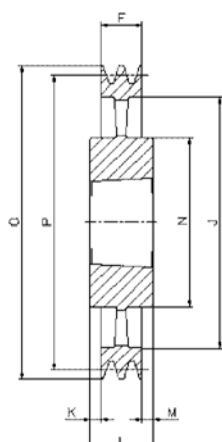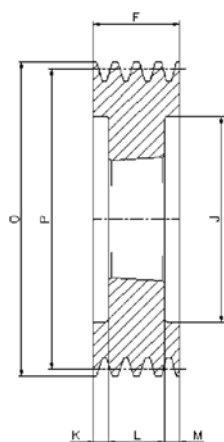


SPB/4

Kod Zamówienia	Typ	Ilość Pasów	P	O	Form	TULEJA	Ø MAX	E	F	J	K	L	M	N
BT01254	SPB125-04	4	125	132	3	2012	50	-	82	82	25	32	25	-
BT01324	SPB132-04	4	132	139	3	2012	50	-	82	89	25	32	25	-
BT01404	SPB140-04	4	140	147	3	2517	60	-	82	100	18,5	45	18,5	-
BT01504	SPB150-04	4	150	157	3	2517	60	-	82	107	18,5	45	18,5	-
BT01604	SPB160-04	4	160	167	3	2517	60	-	82	117	18,5	45	18,5	-
BT01704	SPB170-04	4	170	177	3	2517	60	-	82	127	18,5	45	18,5	-
BT01804	SPB180-04	4	180	187	3	2517	60	-	82	137	18,5	45	18,5	-
BT01904	SPB190-04	4	190	197	3	2517	60	-	82	147	18,5	45	18,5	-
BT02004	SPB200-04	4	200	207	3	3020	75	-	82	157	15,5	51	15,5	-
BT02124	SPB212-04	4	212	219	3	3020	75	-	82	169	15,5	51	15,5	-
BT02244	SPB224-04	4	224	231	3	3020	75	-	82	181	15,5	51	15,5	-
BT02364	SPB236-04	4	236	243	3	3020	75	-	82	193	15,5	51	15,5	-
BT02504	SPB250-04	4	250	257	6	3020	75	25	82	207	15,5	51	15,5	144
BT02804	SPB280-04	4	280	287	6	3020	75	25	82	237	15,5	51	15,5	144
BT03004	SPB300-04	4	300	307	7	3535	90	25	82	257	-	89	7	175
BT03154	SPB315-04	4	315	322	7	3535	90	25	82	272	3,5	89	3,5	175
BT03354	SPB335-04	4	335	342	7	3535	90	25	82	292	3,5	89	3,5	175
BT03554	SPB355-04	4	355	362	7	3535	90	25	82	312	3,5	89	3,5	175
BT04004	SPB315-04	4	400	407	4	3535	90	-	82	357	3,5	89	3,5	175
BT04504	SPB400-04	4	450	457	4	3535	90	-	82	407	-	89	7	175
BT05004	SPB450-04	4	500	507	4	3535	90	-	82	457	-	89	7	175
BT05604	SPB560-04	4	560	567	4	3535	90	-	82	517	-	89	7	175
BT06304	SPB630-04	4	630	637	4	3535	90	-	82	587	-	89	7	175
BT07104	SPB710-04	4	710	717	4	3535	90	-	82	664	3,5	89	3,5	175
BT08004	SPB800-04	4	800	807	4	4040	100	-	82	754	10	102	10	210
BT09004	SPB900-04	4	900	907	4	4040	100	-	82	854	10	102	10	210
BT10004	SPB1000-04	4	1000	1007	4	4040	100	-	82	954	10	102	16	210
BT12504	SPB1250-04	4	1250	1257	4	4545	110	-	82	1204	16	114	16	210


3




4




5

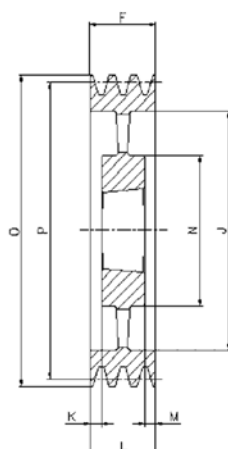

6

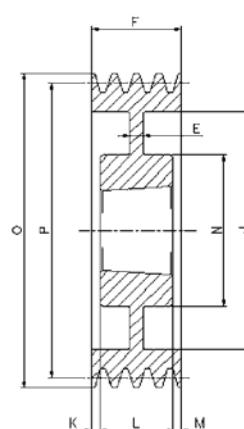


8




SPB/B

Kod Zamówienia	Typ	Ilość Pasów	P	O	Form	TULEJA	Ø MAX	E	F	J	K	L	M	N
BT01255	SPB125-05	5	125	132	8	2012	50	-	101	87	69	32	-	-
BT01325	SPB132-05	5	132	139	8	2517	60	-	101	94	56	45	-	-
BT01405	SPB140-05	5	140	147	3	2517	60	-	101	97	28	45	28	-
BT01505	SPB150-05	5	150	157	3	2517	60	-	101	107	28	45	28	-
BT01605	SPB160-05	5	160	167	3	2517	60	-	101	117	28	45	28	-
BT01705	SPB170-05	5	170	177	3	3020	75	-	101	127	25	51	25	-
BT01805	SPB180-05	5	180	187	3	3020	75	-	101	137	25	51	25	-
BT01905	SPB190-05	5	190	197	3	3020	75	-	101	147	25	51	25	-
BT02005	SPB200-05	5	200	207	3	3020	75	-	101	157	25	51	25	-
BT02125	SPB212-05	5	212	219	3	3020	75	-	101	169	25	51	25	-
BT02245	SPB224-05	5	224	231	3	3020	75	-	101	181	25	51	25	-
BT02365	SPB236-05	5	236	243	3	3535	90	-	101	193	6	89	6	-
BT02505	SPB250-05	5	250	257	3	3535	90	-	101	207	6	89	6	-
BT02805	SPB280-05	5	280	287	6	3535	90	25	101	237	6	89	6	175
BT03005	SPB300-05	5	300	307	6	3535	90	25	101	257	6	89	6	175
BT03155	SPB315-05	5	315	322	6	3535	90	25	101	272	6	89	6	175
BT03355	SPB335-05	5	335	342	6	3535	90	25	101	292	6	89	6	175
BT03555	SPB355-05	5	355	362	6	3535	90	17	101	312	6	89	6	175
BT04005	SPB315-05	5	400	407	5	3535	90	-	101	357	6	89	6	175
BT04505	SPB400-05	5	450	457	5	3535	90	-	101	407	-	89	12	175
BT05005	SPB450-05	5	500	507	5	3535	90	-	101	457	-	89	12	175
BT05605	SPB560-05	5	560	567	4	4040	100	-	101	517	-	102	1	210
BT06305	SPB630-05	5	630	637	4	4040	100	-	101	587	-	102	1	210
BT07105	SPB710-05	5	710	717	4	4040	100	-	101	664	-	102	1	210
BT08005	SPB800-05	5	800	807	4	4040	100	-	101	754	-	102	1	210
BT09005	SPB900-05	5	900	907	4	4040	100	-	101	854	-	102	1	210
BT10005	SPB1000-05	5	1000	1007	4	4545	100	-	101	954	6,5	114	6,5	242
BT12505	SPB1250-05	5	1250	1257	4	4545	110	-	101	1204	6,5	114	6,5	242


3



5

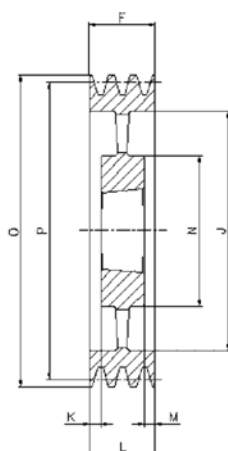


6

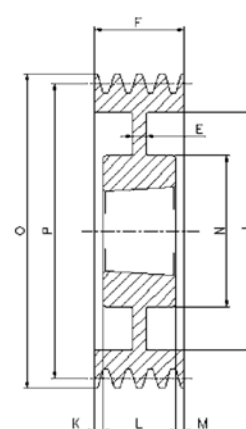


SPB/G

Kod Zamówienia	Typ	Ilość Pasów	P	O	Form	TULEJA	Ø MAX	E	F	J	K	L	M	N
BT01406	SPB140-06	6	140	147	3	2517	60	-	120	100	37,5	45	37,5	-
BT01506	SPB150-06	6	150	157	3	2517	60	-	120	107	37,5	45	37,5	-
BT01606	SPB160-06	6	160	167	3	3020	75	-	120	117	37,5	51	37,5	-
BT01706	SPB170-06	6	170	177	3	3020	75	-	120	127	37,5	51	37,5	-
BT01806	SPB180-06	6	180	187	3	3020	75	-	120	137	37,5	51	37,5	-
BT01906	SPB190-06	6	190	197	3	3020	75	-	120	147	37,5	51	37,5	-
BT02006	SPB200-06	6	200	207	3	3020	75	-	120	157	37,5	51	37,5	-
BT02126	SPB212-06	6	212	219	3	3535	90	-	120	169	15,5	89	15,5	-
BT02246	SPB224-06	6	224	231	3	3535	90	-	120	181	15,5	89	15,5	-
BT02365	SPB236-06	6	236	243	3	3535	90	-	120	193	15,5	89	15,5	-
BT02506	SPB250-06	6	250	257	3	3535	90	-	120	207	15,5	89	15,5	-
BT02806	SPB280-06	6	280	287	6	3535	90	25	120	237	15,5	89	15,5	175
BT03006	SPB300-06	6	300	307	6	3535	90	25	120	257	15,5	89	15,5	175
BT03156	SPB315-06	6	315	322	6	3535	90	25	120	272	15,5	89	15,5	175
BT03356	SPB335-06	6	335	342	6	3535	90	25	120	292	15,5	89	15,5	175
BT03556	SPB355-06	6	355	362	6	3535	90	25	120	312	15,5	89	15,5	175
BT04006	SPB315-06	6	400	407	5	3535	90	-	120	357	15,5	89	15,5	175
BT04506	SPB400-06	6	450	457	5	4040	100	-	120	407	-	102	18	210
BT05006	SPB450-06	6	500	507	5	4040	100	-	120	457	-	102	18	210
BT05606	SPB560-06	6	560	567	4	4040	100	-	120	517	-	102	18	210
BT06306	SPB630-06	6	630	637	4	4040	100	-	120	587	-	102	18	210
BT07106	SPB710-06	6	710	717	4	4040	100	-	120	664	9	102	9	210
BT08006	SPB800-06	6	800	807	4	4545	110	-	120	754	4	114	3	242
BT09006	SPB900-06	6	900	907	4	4545	110	-	120	854	4	114	3	242
BT10006	SPB1000-06	6	1000	1007	4	4545	110	-	120	954	4	114	3	242
BT12506	SPB1250-06	6	1250	1257	4	4545	110	-	120	1204	4	114	3	242


3



5

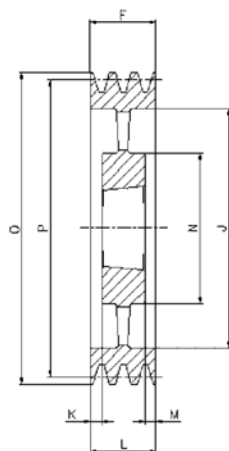


6

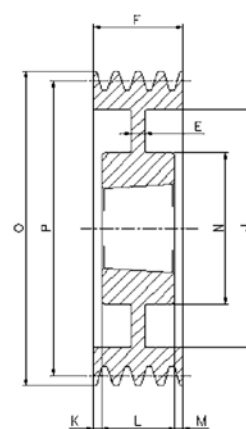


SPB/8

Kod Zamówienia	Typ	Ilość Pasów	P	O	Form	TULEJA	Ø MAX	E	F	J	K	L	M	N
BT01408	SPB140-08	8	140	147	3	2517	60	-	158	97	56,5	45	56,5	-
BT01608	SPB160-08	8	160	167	3	3020	75	-	158	117	53,5	51	53,5	-
BT01708	SPB170-08	8	170	177	3	3030	75	-	158	127	41	76	41	-
BT01808	SPB180-08	8	180	187	3	3030	75	-	158	137	41	76	41	-
BT01908	SPB190-08	8	190	197	3	3030	75	-	158	147	41	76	41	-
BT02008	SPB200-08	8	200	207	3	3535	90	-	158	157	317,5	89	317,5	-
BT02128	SPB212-08	8	212	219	3	3535	90	-	158	169	317,5	89	317,5	-
BT02248	SPB224-08	8	224	231	3	3535	90	-	158	181	317,5	89	317,5	-
BT02368	SPB236-08	8	236	243	3	3535	90	-	158	193	317,5	89	317,5	-
BT02508	SPB250-08	8	250	257	3	3535	90	-	158	207	317,5	89	317,5	-
BT02808	SPB280-08	8	280	287	6	3535	90	25	158	237	317,5	89	317,5	175
BT03008	SPB300-08	8	300	307	6	3535	90	25	158	257	317,5	89	317,5	175
BT03158	SPB315-08	8	315	322	6	3535	90	25	158	272	317,5	89	317,5	175
BT03358	SPB335-08	8	335	342	6	3535	90	25	158	292	317,5	89	317,5	175
BT03558	SPB355-08	8	355	362	6	3535	90	25	158	312	317,5	89	317,5	175
BT04008	SPB315-08	8	400	407	5	4040	100	30	158	357	28	102	28	210
BT04508	SPB400-08	8	450	457	5	4040	100	-	158	407	28	102	28	210
BT05008	SPB450-08	8	500	507	5	4040	100	-	158	457	28	102	28	210
BT05608	SPB560-08	8	560	567	5	4545	110	-	158	517	22	114	22	242
BT06308	SPB630-08	8	630	637	5	4545	110	-	158	587	22	114	22	242
BT07108	SPB710-08	8	710	717	5	4545	110	-	158	664	22	114	22	242
BT08008	SPB800-08	8	800	807	5	4545	110	-	158	754	22	114	22	242
BT09008	SPB900-08	8	900	907	5	4545	110	-	158	854	22	114	22	242
BT10008	SPB1000-08	8	1000	1007	5	5050	125	-	158	954	15,5	127	15,5	267
BT12506	SPB1250-08	8	1250	1257	5	5050	125	-	158	1204	15,5	127	15,5	267


3

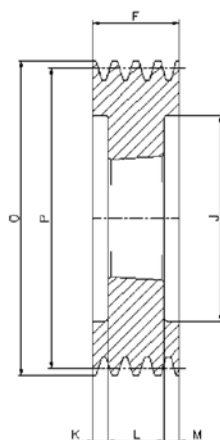

5

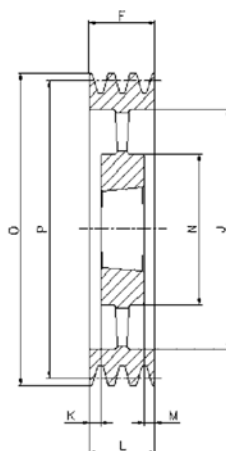

6

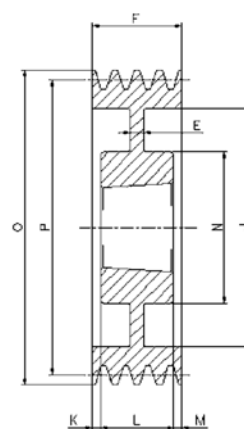

SPB/10

Kod Zamówienia	Typ	Ilość Pasów	P	O	Form	TULEJA	Ø MAX	E	F	J	K	L	M	N
BT0224X	SPB224-10	10	224	231	3	3535	90	-	196	181	53,5	89	53,5	-
BT0236X	SPB236-10	10	236	243	3	3535	90	-	196	193	53,5	89	53,5	-
BT0250X	SPB250-10	10	250	257	3	3535	90	-	196	207	53,5	89	53,5	-
BT0280X	SPB280-10	10	280	287	6	3535	90	30	196	237	53,5	89	53,5	175
BT0315X	SPB315-10	10	315	322	6	3535	90	30	196	272	53,5	89	53,5	175
BT0335X	SPB335-10	10	335	342	6	4040	100	30	196	292	47	102	47	210
BT0355X	SPB355-10	10	355	362	6	4040	100	30	196	312	47	102	47	210
BT0400X	SPB315-10	10	400	407	5	4040	100	30	196	357	47	102	47	210
BT0450X	SPB400-10	10	450	457	5	4545	110	-	196	407	41	114	41	242
BT0500X	SPB450-10	10	500	507	5	4545	110	-	196	457	41	114	41	242
BT0560X	SPB560-10	10	560	567	5	4545	110	-	196	517	41	114	41	242
BT0630X	SPB630-10	10	630	637	5	4545	110	-	196	587	41	114	41	242
BT0710X	SPB710-10	10	710	717	5	4545	110	-	196	664	41	114	41	242
BT0800X	SPB800-10	10	800	807	5	4545	110	-	196	754	41	114	41	242
BT0900X	SPB900-10	10	900	907	5	5050	125	-	196	854	317,5	127	317,5	267
BT1000X	SPB1000-10	10	1000	1007	5	5050	125	-	196	954	317,5	127	317,5	267





 SPECJALNY KOD

1

3

4


7

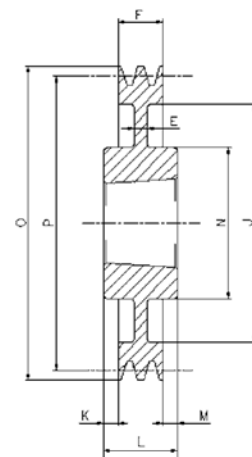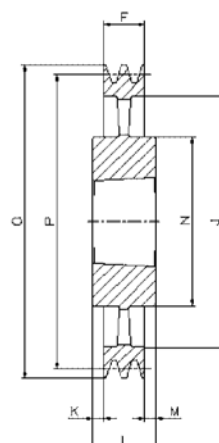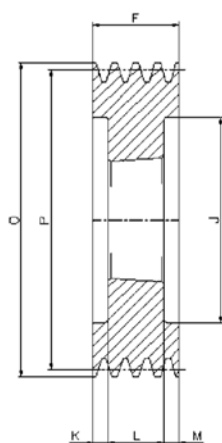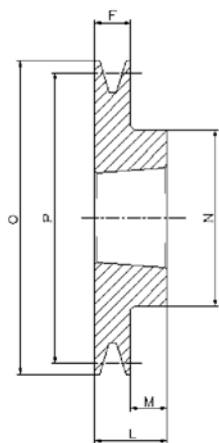


SPC/B

Kod Zamówienia	Typ	Ilość Pasów	P	Q	Form	TULEJA	Ø MAX	E	F	J	K	L	M	N
CT02003	SPC200-08	3	200	209,6	3	2517	60	-	85	144	20	45	20	-
CT02123	SPC212-08	3	212	221,6	3	3020	75	-	85	156	17	51	17	-
CT02243	SPC224-08	3	224	233,6	3	3020	75	-	85	168	17	51	17	-
CT02363	SPC236-08	3	236	245,6	3	3020	75	-	85	180	17	51	17	-
CT02503	SPC250-08	3	250	259,6	3	3020	75	-	85	194	17	51	17	-
CT02653	SPC265-08	3	265	274,6	1	3535	90	-	85	209	-	89	4	175
CT02803	SPC280-08	3	280	289,6	1	3535	90	-	85	224	-	89	4	175
CT03003	SPC300-08	3	300	309,6	7	3535	90	20	85	244	2	89	2	175
CT03153	SPC315-08	3	315	324,6	7	3535	90	20	85	259	2	89	2	175
CT03353	SPC335-08	3	335	344,6	7	3535	90	20	85	279	2	89	2	175
CT03553	SPC355-08	3	355	364,6	7	3535	90	20	85	299	2	89	2	175
CT03753	SPC375-08	3	375	384,6	7	3535	90	25	85	319	2	89	2	175
CT04003	SPC400-08	3	400	409,6	7	3535	90	17	85	344	2	89	2	175
CT04253	SPC425-08	3	425	434,6	7	3535	90	17	85	369	2	89	2	175
CT04503	SPC450-08	3	450	459,6	4	3535	90	-	85	394	2	89	2	175
CT04753	SPC475-08	3	475	484,6	4	3535	90	-	85	419	2	89	2	175
CT05003	SPC500-08	3	500	509,6	4	3535	90	-	85	444	2	89	2	175
CT05303	SPC530-08	3	530	539,6	4	3535	90	-	85	474	2	89	2	175
CT05603	SPC560-08	3	560	569,6	4	3535	90	-	85	504	2	89	2	175
CT06303	SPC630-08	3	630	639,6	4	4040	100	-	85	574	8,5	102	8,5	210
CT08003	SPC800-08	3	800	809,6	4	4545	110	-	85	737	117,5	114	117,5	242
CT10003	SPC1000-08	3	1000	1009,6	4	5050	125	-	85	937	21	127	21	267
CT12503	SPC1250-08	3	1250	1259,6	4	5050	125	-	85	1187	21	127	21	267


3

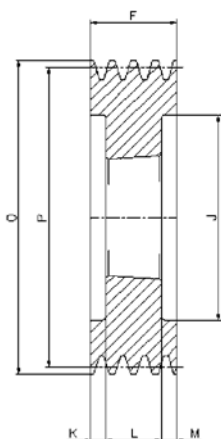


4

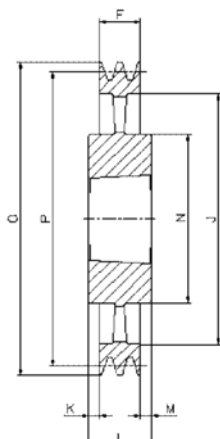

5

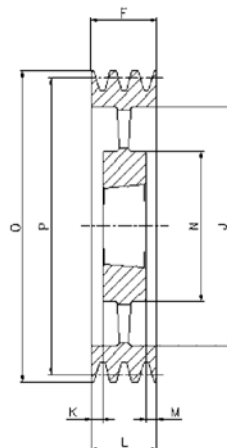


6

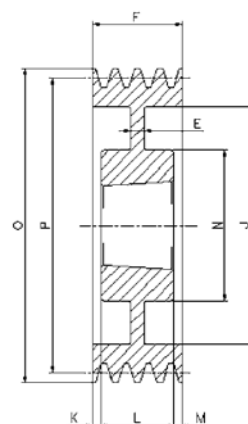


SPC/4

Kod Zamówienia	Typ	Ilość Pasów	P	O	Form	TULEJA	Ø MAX	E	F	J	K	L	M	N
CT02004	SPC200-04	4	200	209,6	3	3020	75	-	111	144	30	51	30	-
CT02124	SPC212-04	4	212	221,6	3	3020	75	-	111	156	30	51	30	-
CT02244	SPC224-04	4	224	233,6	3	3535	90	-	111	168	11	89	11	-
CT02364	SPC236-04	4	236	245,6	3	3535	90	-	111	180	11	89	11	-
CT02504	SPC250-04	4	250	259,6	3	3535	90	-	111	194	11	89	11	-
CT02654	SPC265-04	4	265	274,6	3	3535	90	-	111	209	11	89	11	-
CT02804	SPC280-04	4	280	289,6	6	3535	90	18	111	224	11	89	11	175
CT03004	SPC300-04	4	300	309,6	6	3535	90	20	111	244	11	89	11	175
CT03154	SPC315-04	4	315	324,6	6	3535	90	20	111	259	11	89	11	175
CT03354	SPC335-04	4	335	344,6	6	3535	90	20	111	279	11	89	11	175
CT03554	SPC355-04	4	355	364,6	6	3535	90	20	111	299	11	89	11	175
CT03754	SPC375-04	4	375	384,6	6	3535	90	25	111	319	11	89	11	175
CT04004	SPC400-04	4	400	409,6	6	3535	90	18	111	344	11	89	11	175
CT04254	SPC425-04	4	425	434,6	6	3535	90	18	111	369	11	89	11	175
CT04504	SPC450-04	4	450	459,6	5	3535	90	-	111	394	11	89	11	175
CT04754	SPC475-04	4	475	484,6	5	3535	90	-	111	419	11	89	11	175
CT05004	SPC500-04	4	500	509,6	5	3535	90	-	111	444	11	89	11	175
CT05304	SPC530-04	4	530	539,6	5	4040	100	-	111	474	17,5	102	17,5	210
CT05604	SPC560-04	4	560	569,6	5	4040	100	-	111	504	17,5	102	17,5	210
CT06304	SPC630-04	4	630	639,6	4	4545	110	-	111	574	1,5	114	1,5	242
CT07104	SPC710-04	4	710	719,6	4	5050	125	-	111	654	8	127	8	267
CT08004	SPC800-04	4	800	809,6	4	5050	125	-	111	737	8	127	8	267
CT10004	SPC1000-04	4	1000	1009,6	4	5050	125	-	111	937	8	127	8	267
CT12504	SPC1250-04	4	1250	1259,6	4	5050	125	-	111	1187	8	127	8	267


3

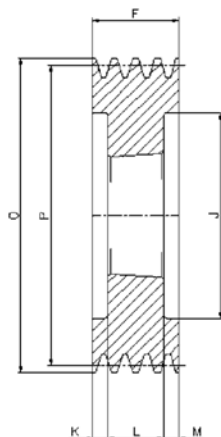

5

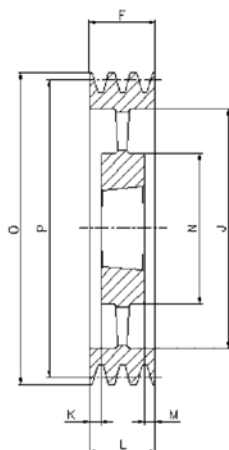


6

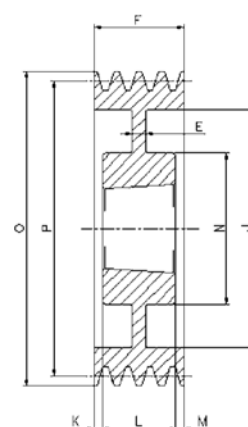


SPC/B

Kod Zamówienia	Typ	Ilość Pasów	P	O	Form	TULEJA	Ø MAX	E	F	J	K	L	M	N
CT02005	SPC200-05	5	200	209,6	3	3535	90	-	136	144	23,5	89	23,5	-
CT02125	SPC212-05	5	212	221,6	3	3535	90	-	136	156	23,5	89	23,5	-
CT02245	SPC224-05	5	224	233,6	3	3535	90	-	136	168	23,5	89	23,5	-
CT02365	SPC236-05	5	236	245,6	3	3535	90	-	136	180	23,5	89	23,5	-
CT02505	SPC250-05	5	250	259,6	3	3535	90	-	136	194	23,5	89	23,5	-
CT02655	SPC265-05	5	265	274,6	3	3535	90	-	136	209	23,5	89	23,5	-
CT02805	SPC280-05	5	280	289,6	3	3535	90	-	136	224	23,5	89	23,5	-
CT03005	SPC300-05	5	300	309,6	6	3535	90	20	136	244	23,5	89	23,5	175
CT03155	SPC315-05	5	315	324,6	6	3535	90	20	136	259	23,5	89	23,5	175
CT03355	SPC335-05	5	335	244,6	6	3535	90	20	136	279	23,5	89	23,5	175
CT03555	SPC355-05	5	355	364,6	6	3535	90	20	136	299	23,5	89	23,5	175
CT03755	SPC375-05	5	375	384,6	6	3535	90	25	136	319	23,5	89	23,5	175
CT04005	SPC400-05	5	400	409,6	6	3535	90	15	136	344	23,5	89	23,5	175
CT04255	SPC425-05	5	425	434,6	6	3535	90	20	136	369	23,5	89	23,5	175
CT04505	SPC450-05	5	450	459,6	5	4040	100	-	136	394	17	102	17	210
CT04755	SPC475-05	5	475	484,6	5	4040	100	-	136	419	17	102	17	210
CT05005	SPC500-05	5	500	509,6	5	4040	100	-	136	444	17	102	17	210
CT05305	SPC530-05	5	530	539,6	5	4545	110	-	136	474	11	114	11	240
CT05605	SPC560-05	5	560	569,6	5	4545	110	-	136	504	11	114	11	242
CT06305	SPC630-05	5	630	639,6	5	5050	125	-	136	574	17,5	127	17,5	267
CT07105	SPC710-05	5	710	719,6	5	5050	125	-	136	654	17,5	127	17,5	267
CT08005	SPC800-05	5	800	809,6	5	5050	125	-	136	737	17,5	127	17,5	267
CT10005	SPC1000-05	5	1000	1009,6	5	5050	125	-	136	937	17,5	127	17,5	267
CT12505	SPC1250-05	5	1250	1259,6	5	5050	125	-	136	1187	17,5	127	17,5	267


3

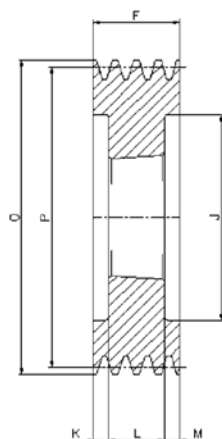

5

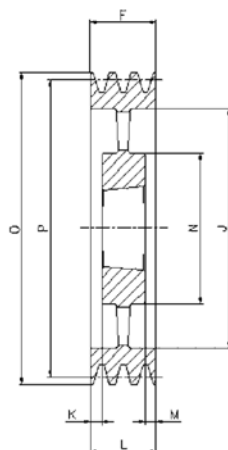


6

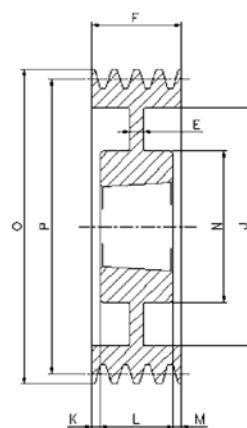


SPC/G

Kod Zamówienia	Typ	Ilość Pasów	P	O	Form	TULEJA	Ø MAX	E	F	J	K	L	M	N
CT02006	SPC200-06	6	200	209,6	3	3535	90	-	162	144	36,5	89	36,5	-
CT02126	SPC212-06	6	212	221,6	3	3535	90	-	162	156	36,5	89	36,5	-
CT02246	SPC224-06	6	224	233,6	3	3535	90	-	162	168	36,5	89	36,5	-
CT02366	SPC236-06	6	236	245,6	3	3535	90	-	162	180	36,5	89	36,5	-
CT02506	SPC250-06	6	250	259,6	3	3535	90	-	162	194	36,5	89	36,5	-
CT02656	SPC265-06	6	265	274,6	3	3535	90	-	162	209	36,5	89	36,5	-
CT02806	SPC280-06	6	280	289,6	6	3535	90	20	162	224	36,5	89	36,5	175
CT03006	SPC300-06	6	300	309,6	6	3535	90	20	162	244	36,5	89	36,5	175
CT03156	SPC315-06	6	315	324,6	6	3535	90	20	162	259	36,5	89	36,5	175
CT03356	SPC335-06	6	335	244,6	6	3535	90	20	162	279	36,5	89	36,5	175
CT03556	SPC355-06	6	355	364,6	6	3535	90	20	162	299	36,5	89	36,5	175
CT03756	SPC375-06	6	375	384,6	6	4040	100	30	162	319	30	102	30	210
CT04006	SPC400-06	6	400	409,6	6	4040	100	30	162	344	30	102	30	210
CT04256	SPC425-06	6	425	434,6	6	4040	110	30	162	369	30	102	24	210
CT04506	SPC450-06	6	450	459,6	6	4545	110	30	162	394	24	114	24	242
CT04756	SPC475-06	6	475	484,6	6	4545	110	30	162	419	24	114	24	242
CT05006	SPC500-06	6	500	509,6	5	4545	125	-	162	444	24	114	24	242
CT05306	SPC530-06	6	530	539,6	5	5050	125	-	162	474	17,5	114	17,5	265
CT05606	SPC560-06	6	560	569,6	5	5050	125	-	162	504	17,5	127	17,5	267
CT06306	SPC630-06	6	630	639,6	5	5050	125	-	162	574	17,5	127	17,5	267
CT07106	SPC710-06	6	710	719,6	5	5050	125	-	162	654	17,5	127	17,5	267
CT08006	SPC800-06	6	800	809,6	5	5050	125	-	162	737	17,5	127	17,5	267
CT10006	SPC1000-06	6	1000	1009,6	5	5050	125	-	162	937	17,5	127	17,5	267
CT12506	SPC1250-06	6	1250	1259,6	5	5050	125	-	162	1187	17,5	127	17,5	267


3

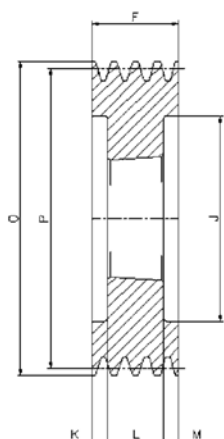

5

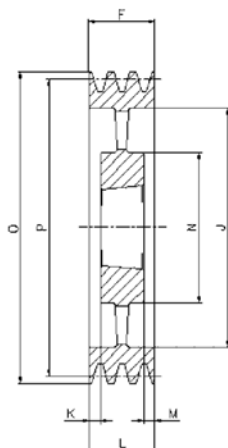

6

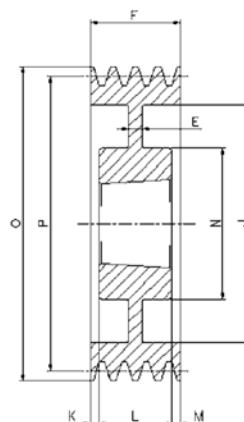


SPC/8


Kod Zamówienia	Typ	Ilość Pasów	P	O	Form	TULEJA	Ø MAX	E	F	J	K	L	M	N
CT02008	SPC200-08	8	200	209,6	3	3535	90	-	213	144	62	89	62	-
CT02128	SPC212-08	8	212	221,6	3	3535	90	-	213	156	62	89	62	-
CT02248	SPC224-08	8	224	233,6	3	3535	90	-	213	168	62	89	62	-
CT02368	SPC236-08	8	236	245,6	3	3535	90	-	213	180	62	89	62	-
CT02508	SPC250-08	8	250	259,6	3	3535	90	-	213	194	62	89	62	-
CT02658	SPC265-08	8	265	274,6	3	3535	90	-	213	209	62	89	62	-
CT02808	SPC280-08	8	280	289,6	3	3535	90	-	213	224	62	89	62	-
CT03008	SPC300-08	8	300	309,6	3	4040	100	-	213	244	55,5	102	55,5	-
CT03158	SPC315-08	8	315	324,6	3	4040	100	-	213	259	55,5	102	55,5	-
CT03358	SPC335-08	8	335	244,6	6	4040	100	50	213	279	55,5	102	55,5	210
CT03558	SPC355-08	8	355	364,6	6	4040	100	40	213	299	55,5	102	55,5	210
CT03758	SPC375-08	8	375	384,6	6	4545	110	30	213	319	49,5	114	49,5	242
CT04008	SPC400-08	8	400	409,6	6	4545	110	30	213	344	49,5	114	49,5	240
CT04258	SPC425-08	8	425	434,6	6	4545	110	30	213	369	49,5	114	49,5	267
CT04508	SPC450-08	8	450	459,6	6	5050	125	30	213	394	43	127	43	267
CT04758	SPC475-08	8	475	484,6	6	5050	125	30	213	419	43	127	43	267
CT04998	SPC500-08	8	500	509,6	6	5050	125	30	213	444	43	127	43	267
CT05308	SPC530-08	8	530	539,6	6	5050	125	30	213	474	43	127	43	267
CT05608	SPC560-08	8	560	569,6	5	5050	125	-	213	504	43	127	43	26
CT06308	SPC630-08	8	630	639,6	5	5050	125	-	213	574	43	127	43	267
CT07108	SPC710-08	8	710	719,6	5	5050	125	-	213	654	43	127	43	267
CT08008	SPC800-08	8	800	809,6	5	5050	125	-	213	737	43	127	43	267
CT09998	SPC1000-08	8	1000	1009,6	5	5050	125	-	213	937	43	127	43	267
CT12508	SPC1250-08	8	1250	1259,6	5	5050	125	-	213	1187	43	127	43	267

SPECJALNY KOD


3

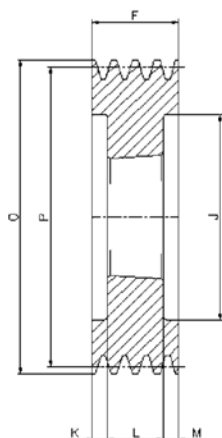

5

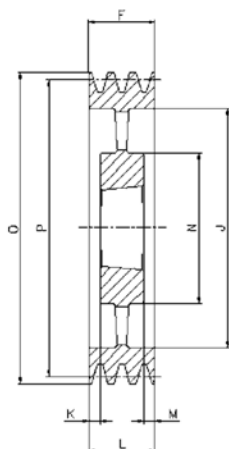


6

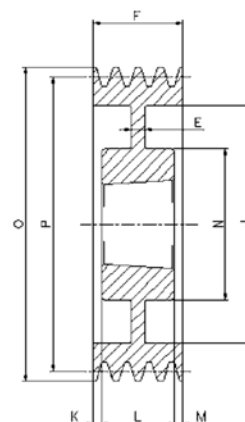

SPC/10


Kod Zamówienia	Typ	Ilość Pasów	P	O	Form	TULEJA	Ø MAX	E	F	J	K	L	M	N
CT0250X	SPC250-10	10	250	259,6	3	4040	100	-	264	194	81	102	81	-
CT0280X	SPC280-10	10	280	289,6	3	4040	100	-	264	224	81	102	81	-
CT0300X	SPC300-10	10	300	309,6	3	4545	110	-	264	244	75	114	75	-
CT0315X	SPC315-10	10	315	324,6	3	4545	110	-	264	259	75	114	75	-
CT0355X	SPC355-10	10	355	364,6	3	4545	110	-	264	299	75	114	75	-
CT0375X	SPC375-10	10	375	384,6	3	4545	110	-	264	319	75	114	75	-
CT0400X	SPC400-10	10	400	409,6	6	5050	125	70	264	344	68,5	127	68,5	267
CT0450X	SPC450-10	10	450	459,6	6	5050	125	40	264	394	68,5	127	68,5	267
CT0500X	SPC500-10	10	500	509,6	6	5050	125	40	264	444	68,5	127	68,5	267
CT0560X	SPC560-10	10	560	569,6	5	5050	125	-	264	504	68,5	127	68,5	267
CT0630X	SPC630-10	10	630	639,6	5	5050	125	-	264	574	68,5	127	68,5	267
CT0710X	SPC710-10	10	710	719,6	5	5050	125	-	264	654	68,5	127	68,5	267
CT0800X	SPC800-10	10	800	809,6	5	5050	125	-	264	737	68,5	127	68,5	267
CT1000X	SPC1000-10	10	1000	1009,6	5	5050	125	-	264	937	68,5	127	68,5	267
CT1250X	SPC1250-10	10	1250	1259,6	5	5050	125	-	264	1187	68,5	127	68,5	267

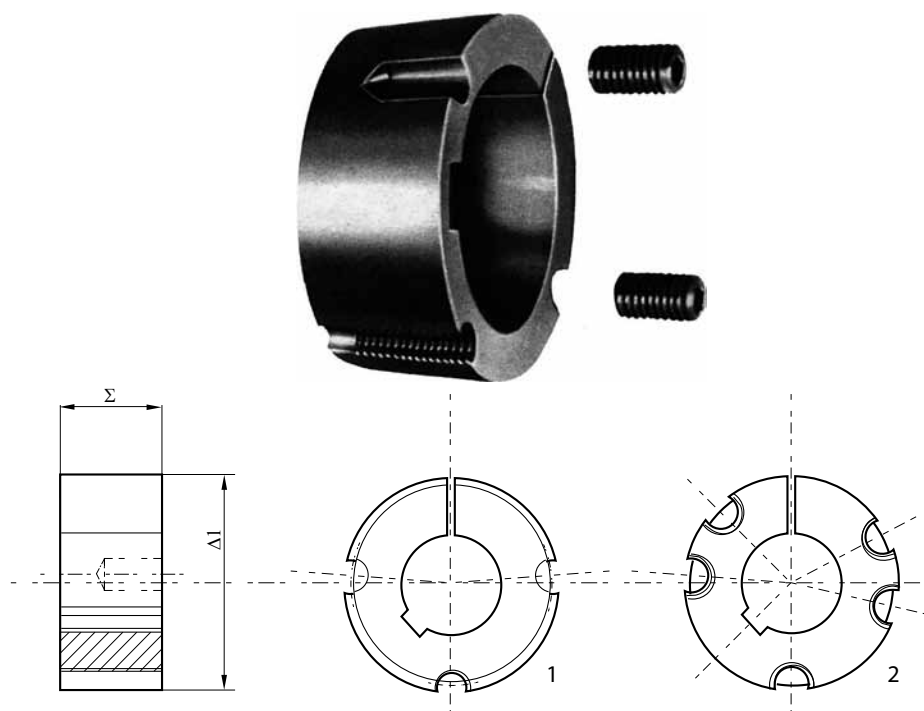

Żeliwo EN-GJL-250 UNI EN 1561

Rozmiary otworów dostępne z magazynu														Przykład: Symbol Otwór w mm Ø 14 = 1615014					
TU- LEJA TYP	COD.	BORE (ISO E 8)												PRZENO- SZONY MOMENT OBROTOWY N·m	SCREWS	D1	TYP	S	MASA
1008	1008...	9	10	11	12	14	16	18	19	20	22	24	25	136	1/4" x 1/2"	35,0	1	22,3	0,16
1108	1108...	9	10	11	12	14	16	18	19	20	22	24	25 28*	147	1/4" x 1/2"	38,0	1	22,3	0,16
1210	1210...	11	12	14	16	18	19	20	22	24	25	28 30	32	407	3/8" x 5/8"	47,5	1	25,4	0,32
1215	1215...	14	19	20	24	25	28							407	3/8" x 5/8"	47,5	1	38,1	0,50
1610	1610...	14	16	18	19	20	22	24	25	28	30	32 35	38 40* 42*	486	3/8" x 5/8"	57,0	1	25,4	0,41
1615	1615...	14	16	18	19	20	22	24	25	28	30	32 35	38 40* 42*	486	3/8" x 5/8"	57,0	1	38,1	0,60
2012	2012...	14	16	18	19	20	22	24	25	28	30	32 35	38 40 42 45 48 50*	808	7/16" x 7/8"	70,0	1	31,8	0,75
2517	2517...	16	18	19	20	22	24	25	28	30	32	35 38	40 42 45 48 50 55 60 65*	1310	1/2" x 1"	85,5	1	44,5	1,06
3020	3020...	25	28	30	32	35	38	40	42	45	48	50 55	60 65 70 75	2710	5/8" x 1" 1/4	108,0	1	50,8	2,50
3030	3030...	35	38	40	42	45	48	50	55	60	65	70 75	2710		5/8" x 1" 1/2	108,0	1	76,2	3,75
3525	3525...	35	38	40	42	45	48	50	55	60	65	70 75	80	5060	1/2" x 1" 1/2	127,0	2	64,9	4,20
3535	3535...	35	38	40	42	45	48	50	55	60	65	70 75	80 85 90*	5060	1/2" x 1" 1/2	127,0	2	88,9	5,13
4030	4030...	40	42	45	48	50	55	60	65	70	75	80 85	90 100*	8740	5/8" x 1" 1/2	146,0	2	76,2	6,75
4040	4040...	40	42	45	48	50	55	60	65	70	75	80 85	90 100*	8740	5/8" x 1" 3/4	146,0	2	101,6	7,68
4545	4545...	55	60	65	70	75	80	85	90	100*				12400	3/4" x 2"	162,0	2	115,0	10,56
5050	5050...	70	75	80	85	90	100	105	110	115	120	125	14200		7/8" x 2" 1/4	177,6	2	127,0	15,17

Wymiary wpustów (UNI 6604 DIN 6885) do standardowych kół

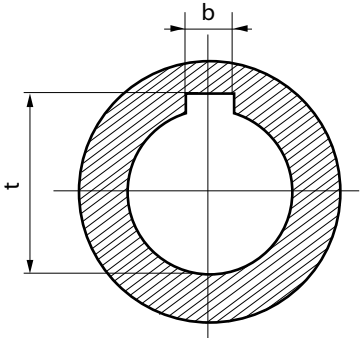D	b	Js9	t		Wymiary wpustów		
					D*	b	t
Over 10 to 12	4		D + 1,8				
» 12 » 17	5	±0,015	D + 2,3				
» 17 » 22	6		D + 2,8				
» 22 » 30	8		D + 3,3				
» 30 » 38	10	±0,015	D + 3,3				
» 38 » 44	12		D + 3,3				
» 44 » 50	14		D + 3,8				
» 50 » 58	16	±0,021	D + 4,3				
» 58 » 65	18		D + 4,4				
» 65 » 75	20		D + 4,9				
» 75 » 85	22		D + 5,4				
» 85 » 95	25	±0,026	D + 5,4				
» 95 » 110	28		D + 6,4				
» 110 » 130	32	±0,031	D + 7,4				
					28*	28*	28*
					35*	35*	35*
					40*/42*	40*/42*	40*/42*
					50*	50*	50*
					65*	65*	65*
					90*	90*	90*
					100*	100*	100*

www.schipolska.pl